XOT_SC
WALL MOUNT HOOD

HOW BEAUTIFUL KITCHENS BREATHE





XOT_SC

- Electronic 3 Speed Control + Power Boost
- CCC ON - 395 CFM maximum
- High Efficiency 3000k LED Lights (x2)
- 5 Minute delay function

DESIGNED AND CRAFTED IN ITALY

The XOT exemplifies the classic American Pro Hood design. This high performance under cabinet hood includes baffle filters. Our superior quality materials and workmanship make this hood a standout among the rest. Recirculation is available for 24, 30, 36 and 48 inch models.

At XO, we believe that a good design is something everyone can afford


WORLD CLASS SERVICE | COMPREHENSIVE WARRANTIES

OUR LASTING COMMITMENT TO YOU




XOT_SC

WALL MOUNT HOOD

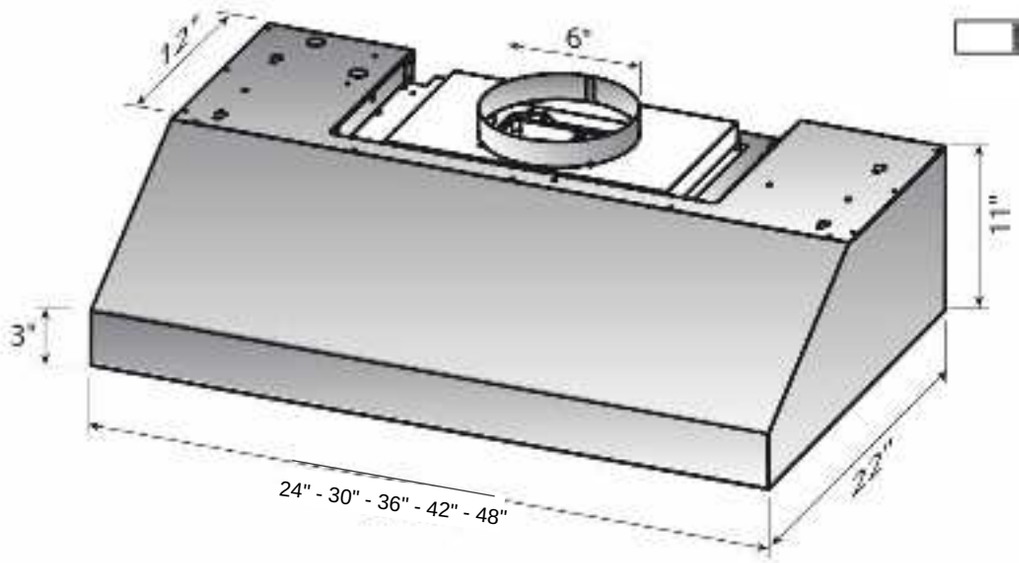

Recirculation - 24 / 30 / 36 / 48
Adds 2-1/4" to overall height

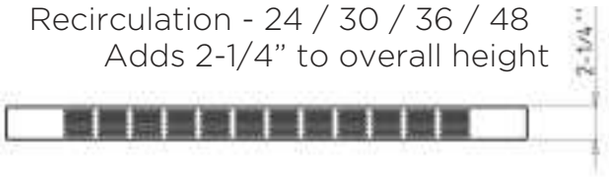

6" round top or rear venting

DESIGNED & CRAFTED IN ITALY
fabiano Collection

FEATURES

FINISH

Stainless Steel

FEATURES

- Electronic 3 Speed Control + Power Boost
- CCC ON - 395 CFM maximum
- High Efficiency 3000k LED Lights (x2)
- High Velocity Blower optimally removes Smoke, Grease and Odors
- Dishwasher Safe Baffle Filters
- 6" Top or Rear Duct or Recirculating (Kit Sold Separately) (Recirculation adds 2-1/4" to the overall height of the unit)
- 5 Minute Delay Shutoff Timer
- Made In Italy

SPECIFICATIONS

ELECTRICAL 120VAC 60HZ 3.6 AMP

DIMENSIONS

H	11" - 13 1/4" (Recirc)
W	24", 30", 36", 42", 48"
D	22"

MOUNTING HEIGHT

ABOVE COOKING 27" - 32"

OPTIONS

Recirculation Kit XOT24	**XORFK06**
Recirculation Kit XOT30	**XORFK07**
Recirculation Kit XOT36	**XORFK08**
Recirculation Filters	**XORFRND**
6" Make Up Air Kit	**XOMA06**
Recirculation Kit XOT48	**XORFK09**

XOT42SC: ducted only (no recirculation).

PERFORMANCE (CCC OFF)

SPEED	1	2	3	BOOST
CFM	160	250	395	600
SONES	1.0	2.5	4.0	6.5

XO the next level in luxury appliances
xoappliance.com | 800 966 6400

UL LISTED


XO is exclusively distributed by
EASTERN MARKETING CORP.
24 Eisenhower Parkway
Roseland, NJ 07068

XOT_SC

WALL MOUNT HOOD

RECOMMENDED MOUNTING HEIGHT

All range hoods have a recommended range of installation height over the cooking surface. However cooking styles, types of cooking equipment and installation limitation can vary greatly. For installations outside the recommended range - consult XO.

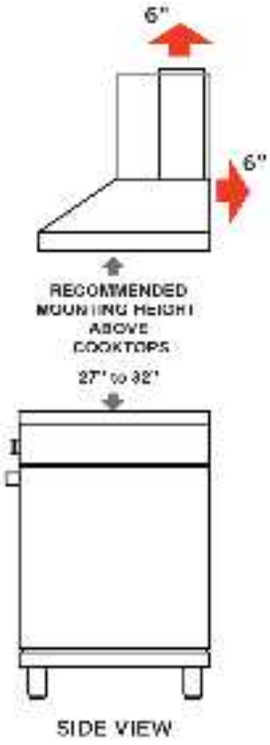

THESE MODELS HAVE A 6" DIAMETER EXHAUST DUCT WHICH MAY BE CONFIGURED FOR TOP OR REAR DISCHARGE - CONSULT MANUAL FOR ADDITIONAL INFORMATION.

RECIRCULATION



These XOT models may be installed with an optional recirculation kit when venting outside is not practical. The recirculation kit includes a vented housing that mounts on top of the hood. This housing adds 9-1/4" to the height of the unit. Never discharge the exhaust into a confined space such as a soffit, attic, garage, crawl space or the voids between walls.

XOT42SC: ducted only. Recirculation kits: XOT24 / 30 / 36 / 48.

HOW DOES CODE COMPLIANCE CONTROL HELP -

Code Compliance Control

CODE COMPLIANCE CONTROL (CCC) enables the installer to re-program the hood as it is being installed. Your XO Hood is set to operate at 600 CFM maximum at the factory.

Re-programing is accomplished quickly and requires no special tools or additional parts but once done, the air flow rate is limited to a maximum of 395 CFM below the 400 CFM cap that most local codes impose eliminating the need for additional controls.

Re-programming also disables the Power Boost function. After conversion, the installer affixes a label stating the unit has been converted to 395 CFM max. Once done, the unit cannot be changed back.

If your application calls for a make-up air solution, XO gives you more choices.