G 5482 SCVi SL
Fully integrated dishwasher
44 dB I Cutlery tray I Comfort baskets I QuickIntenseWash I Delay start



- Tested for the equivalent of 20 years' service life*
- Fits into any niche – the space-saving dishwasher for compact kitchens
- Flexible basket design perfect for everyday use – Comfort baskets
- QuickIntenseWash, superior cleaning and drying in under 60 min
- Thanks to delay start, you can set a start time for the wash cycle up to 24 hours in advance
- Very easy door opening and closing – ComfortClose

* During the development phase of the G 5000 and G 7000 dishwasher series, Miele tested models and core components in 5,600 wash cycles (= 280 wash cycles per year over a period of 20 years) in various programs. More at: mieleusa.com/20years

EAN: 4002516376170 / Material number: 11636760 /
Old Material Number: 21548262USA

General information	
Model number	G 5482 SCVi SL
Manufacturer material number	11636760
EAN number	4002516376170
Marketing class	Silver
Type	
Fully integrated dishwashers	•
18 inch dishwasher	•
Design	
Fascia color	Stainless Steel.
Fascia panel version	Fully integrated fascia
Control type	Program selector button
Control panel	7-segment display
Display color	Yellow
Convenience	
Door closing aid	ComfortClose
Operating noise dB(A) re 1 pW	44
Countdown indicator	•
Delay start up to 24 hours	•
In-operation indicator	acoustic
Efficiency	
Noise emissions in dB(A)	44
Proven hygiene	•
Hot water connection	•
Half load	•
ENERGY STAR® Most Efficient	•
Quality of results	
Fresh water dishwasher	•
Water softener system	Uni. water softener to 70° dH, Economic salt consumption
Wash programs	
QuickIntenseWash	•
Normal	•
Pots & Pans	•
SaniWash	•
Rinse & Hold	•
Dishwashing options	
Short	•
Express	•
Extra Clean	•
Extra dry	•
Baskets	
Cutlery loading	Cutlery tray
Basket design	Comfort 18" (45 cm)
Safety	
Waterproof system	•

Miele

G 5482 SCVi SL

Fully integrated dishwasher


44 dB I Cutlery tray I Comfort baskets I QuickIntenseWash I Delay start



EAN: 4002516376170 / Material number: 11636760 /
Old Material Number: 21548262USA


Technical data	
Niche width min in in.(mm)	17 3/4 (450)
Niche width max in in.(mm)	17 3/4 (450)
Niche height min in in.(mm)	32 1/8 (815)
Niche height max in in.(mm)	34 3/4 (880)
Niche depth in in.(mm)	21 3/4 (550)
Appliance width in in.(mm)	17 3/4 (448)
Appliance height in in.(mm)	31 3/4 (805)
Appliance depth in in.(mm)	21 3/4 (550)
Appliance depth with door open in in.(cm)	45 7/8 (116.5)
Net weight in lbs. (kg)	90 (40.8)
Total connected load in kW	1.40
Voltage in V	120
Fuse rating in A	15
Number of phases	1
Electrical frequency standard	60
Length of water inlet hose in m	5 (1.50)
Length of water drain hose in m	5 (1.50)
Length of electrical wire in ft (m)	4 (1.20)
Min. front panel weight in kg	2.0
Max. front panel weight in kg	8.0
Standard accessories	
Voucher for 1 x box of UltraTabs (20 tabs) or 3 boxes (60 tabs in each) at a reduced price	•

G 5482 SCVi SL
Fully integrated dishwasher
44 dB I Cutlery tray I Comfort baskets I QuickIntenseWash I Delay start

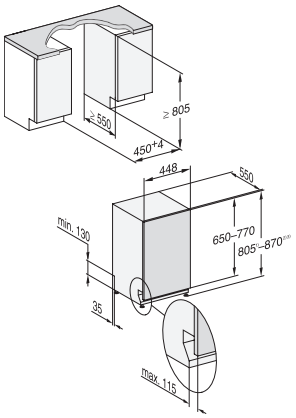

G7000, fully integrated dishwasher, 45cm (installation drawing)

1) Plinth height 35-155 mm, 2) Plinth height 100-220 mm, 3) Appliance height max. 970 mm with plinth height conversion kit (Mat.-Nr. 6.394.761),

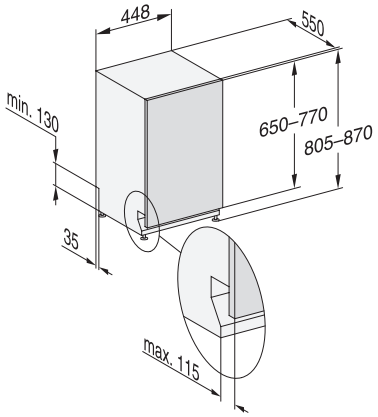

G7000, fully integrated dishwasher, 45cm (installation drawing)