XOCYL16BC
DESIGNER HOOD

HOW BEAUTIFUL KITCHENS BREATHE





XOCYL16BC

- Electronic 3 Speed Control
- Whisper Quiet Powerful Blowers
- Use Alone or in Multiples
- 5 Minute delay function

DESIGNED AND CRAFTED IN ITALY

16” DESIGNER HOOD
Used alone - or in multiples

The contemporary XOCYL, designed and crafted in Italy, performs as beautifully as it looks. With quiet, efficient peripheral aspiration the blower whisks away cooking exhaust, while twin spot lights brilliantly illuminate the work area below.

At XO, we believe that a good design is something everyone can afford


WORLD CLASS SERVICE | COMPREHENSIVE WARRANTIES


OUR LASTING COMMITMENT TO YOU



XOCYL16BC

DESIGNER HOOD

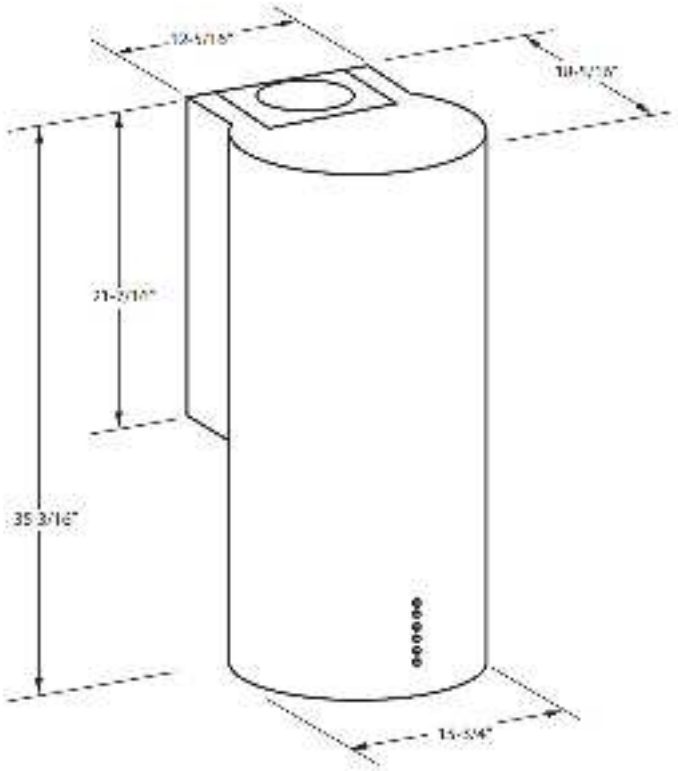

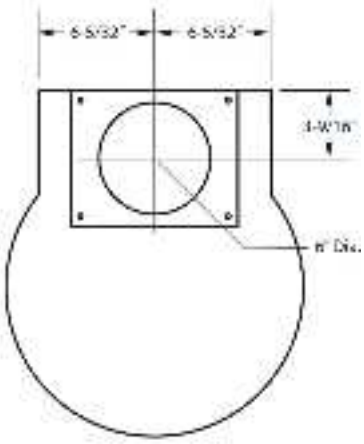

DESIGNED & CRAFTED IN ITALY

FEATURES

FINISH

Black

Also available in Stainless Steel and Satin Gold

FEATURES

- Electronic 3 Speed Control + Power Boost
- CCC Code Compliance Control - 395 or 600 CFM
- Perimeter Aspiration / Quieter / More Powerful
- High Efficiency 3000k LED Lights (x2)
- Whisper Quiet Blowers remove smoke and grease
- Dishwasher Safe Aluminum Mesh Filters
- Use Alone or in Multiples
- Made In Italy

RECIRCULATION OPTION

Filtered exhaust from the hood is returned to the kitchen via a top vent.

PERFORMANCE

SPEED	1	2	3
CFM	160	250	395
SONES	1.0	2.5	4

XO the next level in luxury appliances

xoappliance.com | 800.966.6300

SPECIFICATIONS

ELECTRICAL 120VAC 60HZ 4.0 AMP*

DIMENSIONS

H 35 3/16”

W 15 3/4”

D 18 5/16”

MOUNTING HEIGHT 27” - 32“

OPTIONS

Recirculation Kit	**XORFK16**
Recirculation Filters	**XORFRND**
Make Up Air Kit (6”)	**XOMA06**

IMPORTANT NOTE:

Recirculation requires 4” minimum clearance above the unit. In kitchens where inadequite ceiling height exists, the side venting XOCYLI may be a solution.

*dedicated 15 amp service required
unit must be properly grounded
see installation instructions

UL LISTED

XO is exclusively distributed by
EASTERN MARKETING CORP.
24 Eisenhower Parkway
Roseland, NJ 07068


XOCYL16BC

DESIGNER HOOD

RECOMMENDED MOUNTING HEIGHT


All range hoods have a recommended range of installation height over the cooking surface. However cooking styles, types of cooking equipment and installation limitations can vary greatly. For installations outside the recommended range - consult XO.

THESE MODELS HAVE A 6" DIAMETER EXHAUST DUCT

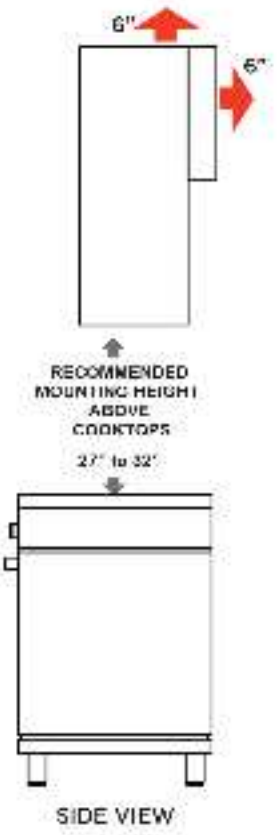

RECIRCULATION

The XOCYL model may be installed with an optional recirculation kit when venting outside is not practical. When used in recirculation mode the filtered exhaust is directed back into the living space through a vent grill in the top. This requires a minimum clearance of 4" from the ceiling.

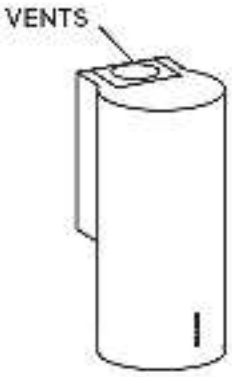

HOW DOES CODE COMPLIANCE CONTROL HELP -

Code Compliance Control

CODE COMPLIANCE CONTROL (CCC) enables the installer to re-program the hood as it is being installed. Your XO Hood is set to operate at 600 CFM maximum at the factory.

Re-programing is accomplished quickly and requires no special tools or additional parts but once done, the air flow rate is limited to a maximum of 395 CFM below the 400 CFM cap that most local codes impose eliminating the need for additional controls.

Re-programming also disables the Power Boost function. After conversion, the installer affixes a label stating the unit has been converted to 395 CFM max. Once done, the unit cannot be changed back.

If your application calls for a make-up air solution, XO gives you more choices.

UL LISTED
XO is exclusively distributed by EASTERN MARKETING CORP.
24 Eisenhower Parkway
Roseland, NJ 07068