XOI27SC
INSERT

HOW BEAUTIFUL KITCHENS BREATHE





XOI27SC

- High-Velocity Blower
- Incomparable handcrafted Italian finish
- 3 speed electronic illuminated controls
- 5 Minute delay function

DESIGNED AND CRAFTED IN ITALY

The XOI insert is an integrated blower which allows you to match your custom hood to your kitchen. This simple and affordable design is easy to install. Designed and crafted in Italy for the ultimate in fit and finish.

At XO, we believe that a good design is something everyone can afford


WORLD CLASS SERVICE | COMPREHENSIVE WARRANTIES


OUR LASTING COMMITMENT TO YOU


LOVE IT OR LEAVE IT
100% GUARANTEED

XOI27SC (DETAIL)

INSERT

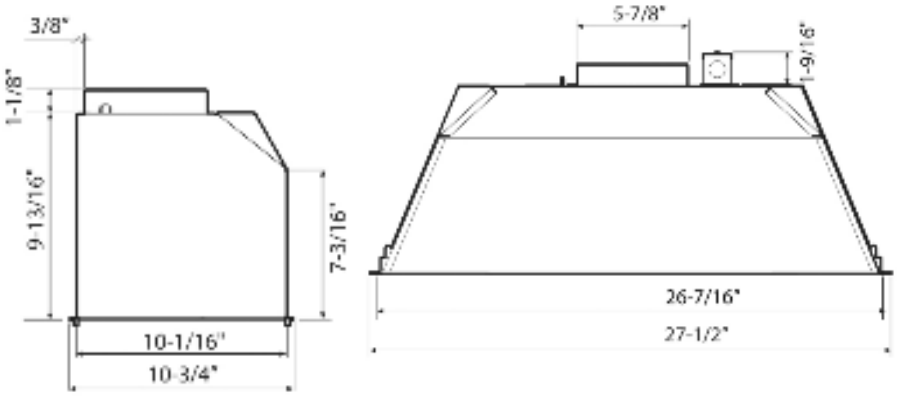

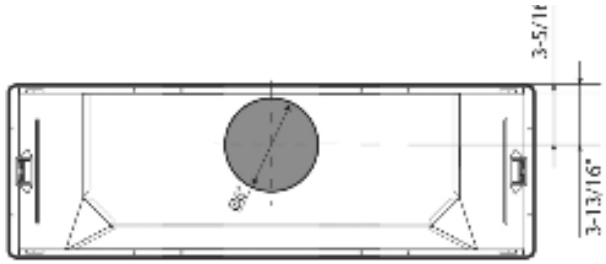

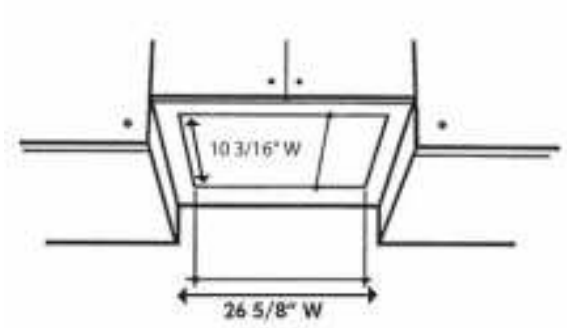

IMPORTANT NOTE: When used in a recirculating mode, provision must be made to return the exhaust to the living space - see installation instructions for complete information

DESIGNED & CRAFTED IN ITALY fabriano Collection

FEATURES

FINISH

Stainless Steel

FEATURES

- Electronic 3 Speed Control + Power Boost
- CCC Code Compliance Control - 395 or 600 CFM
- High Efficiency 3000k LED Lights (x2)
- Compact design makes installation a breeze
- High Velocity Blower optimally removes Smoke, Grease and Odors
- Dishwasher safe Aluminum Mesh Filters
- 6" Vertical Duct or Recirculating (Kit Sold Separately) (Recirculated air must be returned to the living space)
- 5 Minute Delay Shutoff Timer
- Made In Italy

PERFORMANCE

SPEED	1	2	3	BOOST
CFM	150	250	395	600
SONES	1.0	2.4	4.0	6.4

SPECIFICATIONS

ELECTRICAL 115VAC 60HZ 4 AMP

DIMENSIONS

H 10 15/16"
W 23/4"
D 11"

CUTOUT DIMENSIONS

26-5/8" x 10 3/16"

MOUNTING HEIGHT

ABOVE COOKING 27" - 32"

OPTIONS

Recirculation Kit	**XORFK12**
Recirculation Filters	**XORFRND**
Adjustable SS Liner	**XOLINER30**
Adjustable SS Liner	**XOLINER36**
Make Up Air Kit (6")	**XOMA06**

XO the next level in luxury appliances
xoappliance.com | 800.966.6400

UL LISTED

XO is exclusively distributed by
EASTERN MARKETING CORP.
24 Eisenhower Parkway
Roseland, NJ 07068

XOI27SC

INSERT

RECOMMENDED MOUNTING HEIGHT


All range hoods have a recommended range of installation height over the cooking surface. However cooking styles, types of cooking equipment and installation limitation can vary greatly. For installations outside the recommended range - consult XO.



THESE MODELS HAVE A 6" DIAMETER EXHAUST DUCT WHICH MAY BE CONFIGURED FOR TOP OR REAR DISCHARGE - CONSULT MANUAL FOR ADDITIONAL INFORMATION.

RECIRCULATION

These XOI models may be installed with an optional recirculation kit when venting outside is not practical. When used in recirculation mode the filtered exhaust must be ducted back into the living space. Never discharge the exhaust into a confined space such as a soffit, attic, garage, crawl space or the voids between walls.

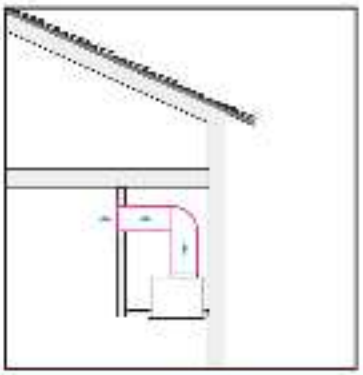

HOW DOES CODE COMPLIANCE CONTROL HELP -

CODE COMPLIANCE CONTROL (CCC) enables the installer to re-program the hood as it is being installed. Your XO Hood is set to operate at 600 CFM maximum at the factory.

Re-programing is accomplished quickly and requires no special tools or additional parts but once done, the air flow rate is limited to a maximum of 395 CFM below the 400 CFM cap that most local codes impose eliminating the need for additional controls.

Re-programming also disables the Power Boost function. After conversion, the installer affixes a label stating the unit has been converted to 395 CFM max. Once done, the unit cannot be changed back.

If your application calls for a make-up air solution, XO gives you more choices.