
XOI33KSE

INSERT

HOW BEAUTIFUL KITCHENS BREATHE



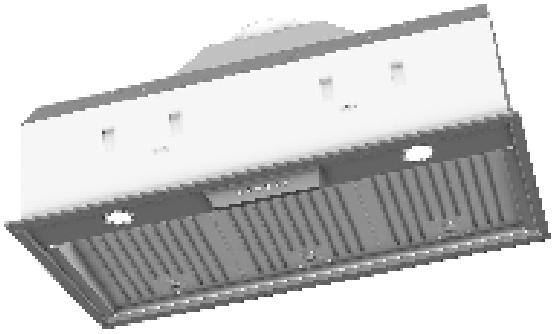

XOI33KSE

- Electronic 3 Speed Control
- Stainless Steel PRO Baffle Filters
- High Efficiency 3000k LED Lights (x2)
- 5 Minute Delay Shutoff Timer

DESIGNED AND CRAFTED IN ITALY

The XOI insert is an integrated blower which allows you to match your custom hood to your kitchen. This simple and affordable design is easy to install. Designed and crafted in Italy for the ultimate in fit and finish.

At XO, we believe that a good design is something everyone can afford


WORLD CLASS SERVICE | COMPREHENSIVE WARRANTIES


OUR LASTING COMMITMENT TO YOU

LOVE IT OR LEAVE IT


XOI33KSE


INSERT

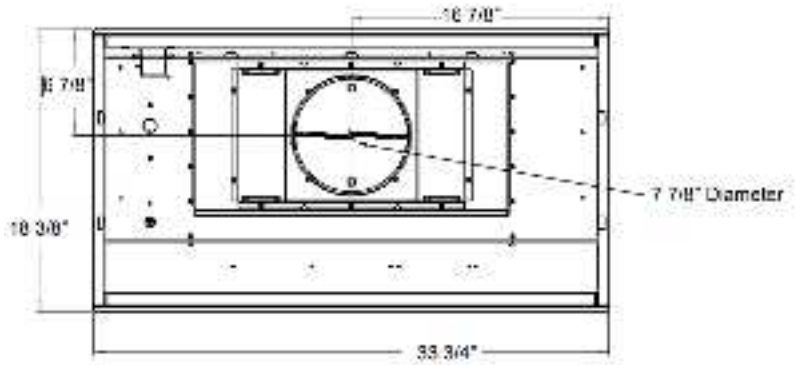

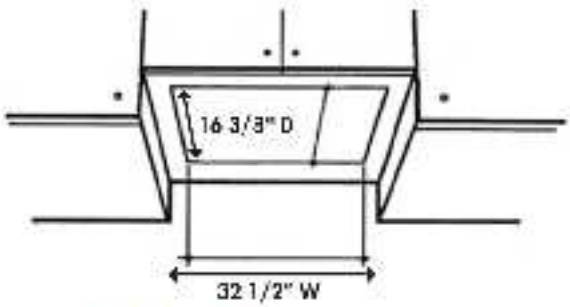

Cut out dimensions: Width 32 1/2" Depth: 16 3/8"

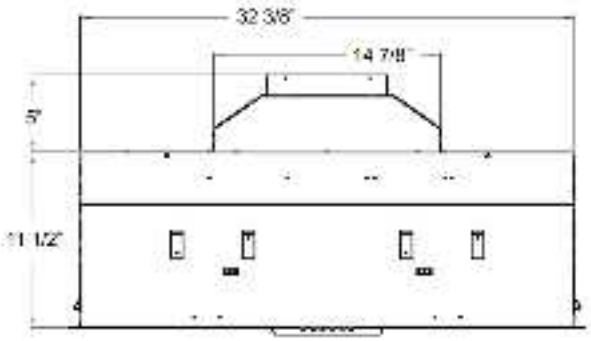

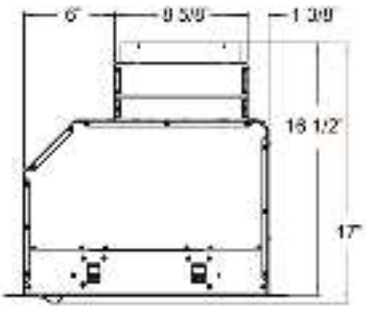

DESIGNED & CRAFTED IN ITALY

FEATURES

FINISH

Stainless Steel

FEATURES

- 1000 CFM High Velocity Blower Optimally Removes Smoke, Grease And Oders
- 3 Speed Push Button Control
- Powerful, Precision Balanced Blower
- High Efficiency 3000k LED lights (x2)
- Stainless Steel PRO Baffle Filters
- 5 Minute Delay Shutoff Timer
- 8" Vertical Duct
- Made In Italy

SPECIFICATIONS

ELECTRICAL 115VAC 60HZ 6.6 AMP

DIMENSIONS

H	11-1/2"
W	33-3/4"
D	18-3/8"

MOUNTING HEIGHT

ABOVE COOKING 27" - 32"

CUTOUT DIMENSIONS

XOI33KSE 32-1/2" x 16-3/8"

OPTIONS

8" Make-Up Air Kit **XOMA08**

PERFORMANCE

SPEED	1	2	3
CFM	200	590	1000
SONES	2.0	6.4	8.0

XO the next level in luxury appliances

xoappliance.com | 800.966.6300

UL LISTED

XO is exclusively distributed by
EASTERN MARKETING CORP.
24 Eisenhower Parkway
Roseland, NJ 07068

XOI33KSE

INSERT

RECOMMENDED MOUNTING HEIGHT

All range hoods have a recommended range of installation height over the cooking surface. However cooking styles, types of cooking equipment and installation limitation can vary greatly. For installations outside the recommended range – consult XO.



THESE MODELS HAVE AN 8" DIAMETER VERTICAL EXHAUST DUCT

MAKE-UP AIR

Many states have adopted regulations regarding the re-introduction of make-up air for homes with ventilation systems which can exhaust more than a specified volume of air, typically 400 CFM.

Your cooking equipment and use determine how much ventilation you need. If your local building codes require a make-up air solution based on that need, XO has the answer.

XOMA MAKE-UP AIR KITS

Make-Up Air Kits consist of two parts:

1. A sensor collar which is mounted in the exhaust duct of the hood. This contains a feather switch that is activated when air flow is detected in the duct.



2. A motorized air inlet damper which is usually mounted to the home's HVAC system.
When it receives a signal from the sensor collar, the damper automatically opens to admit fresh air which is distributed via the HVAC system.

When the blower shuts off, the feather switch returns to the off position and the motorized damper is deactivated. The air inlet damper is automatically closed by a return spring.

UL LISTED
XO is exclusively distributed by
EASTERN METAL FABRICATING CORP.
24 Eisenhower Parkway
Roseland, NJ 07068