AMERICAN 🌢 RANGE

PERFORMER SERIES with Open Burners



*ARROB-436GD Shown with 4" Stub Back Hand polished stainless steel finish. Other models available

RANGE TOP FEATURES

- · True commercial lift-off burners for easy cleaning.
- 3 sizes of burners to serve your everyday needs: 25,000 BTU (lg), 18,000 BTU (med) and 12,000 BTU (sm)
- · Variable infinite flame settings for all open top burners.
- · Automatic, electronic ignition ensures re-ignition in the event the flame goes out, even on the lowest burner setting.
- Continuous commercial-grade cast iron grates.
- · Porcelainized burner pans catch spills and lift out for easy cleaning.
- · Analog controls provide easy, push and turn operation.
- · Blue LED light indicates oven functions.
- · Heavy duty metal die-cast black satin knobs with chrome bezels.
- · Stainless steel Island Back trim included and installed.
- · Front panel switch controls oven lighting for optimal visibility.

OVEN FEATURES

- Multiple functions include: Standard Bake, Convection Bake, Infrared Broil and Fan modes.
- Convection fan optimizes uniform air flow.
- · Two chrome plated heavy duty racks with 4 positions on heavy chrome side supports.
- · Accommodates full size commercial sheet pan.
- · Ceramic Infrared Broiler provides rapid searing at 1,600°F
- · Quick Preheat times & uniform cooking temp. with 28,000 BTU Bake Burner.
- · Extra-large viewing window in oven door.
- · Porcelainized oven interior simplifies cleaning.
- One piece durable precision frame construction oven front.

CONVECTION OVEN TECHNOLOGY




Balanced turbulent heat distribution is essential when baking, roasting, and dehydrating food. The American Range convection oven technology features a convection motor and fan to enhance uniform heat distribution throughout the large oven cavity.

The strategic placement of the convection fan ensures consistent heat distribution even when challenged with cooking the largest turkey, ham or

CONVECTION OVEN IS GREEN TECHNOLOGY

The efficient design of the convection oven uses less gas than a standard oven.


Customize with RAL® for the best color that suits your lifestyle.







PERFORMER SERIES with Open Burners

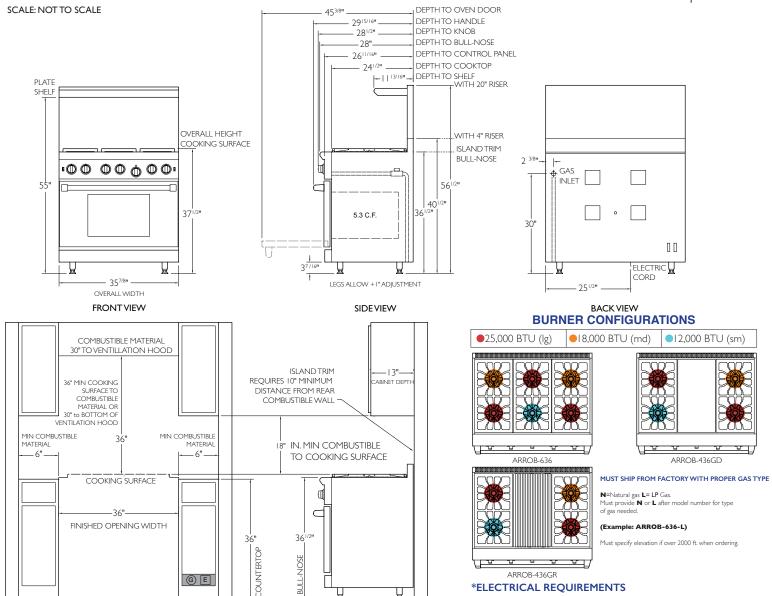

GE RECOMMENDED LOCATION OF GAS AND ELECTRICAL SUPPLY

A grounded three prong plug with proper polarity must be used.

SILAND OR PENINSULA INSTALLATIONS 10" MINIMUM CLEARANCE FROM BACK OF RANGETO COMBUSTIBLE SURFACE, ISLAND TRIM () IN, CLEARANCE TO NON COMBUSTIBLE SURFACE, NO SIDE WALL ABOVE COOKING SURFACE THIS APPLIANCE SHOULD NOT BE INSTALLED WITH AN AIR CURTAIN OR OTHER TYPE OF VENTILATION SYSTEM THAT BLOWS AIR DOWNWARD TOWARD THE RANGE, SUCH TYPE OF VENTILATION SYSTEM MAY CAUSE IGNITION AND COMBUSTION PROBLEMS WITH THE GAS COOKING APPLIANCE RESULTING IN PERSONAL INIURY OR UNINTENDED OPERATION.

TECHNICAL SPECIFICATIONS

TECHNICAL SPECIFICATIONS										
Overall Oven Capacity	5.3 CU. FT.		ARROB-636							
Oven Dimensions	32"W × 19" D × 15" H	Total Gas Connection Rating	ARROB-436GD 128,000 BTU 4 burners and griddle							
Surface Burner Rating	25,000 BTU (lg) - 18,000 BTU (md) - 12,000 BTU (sm)		ARROB-436GR 126,000 BTU 4 burners and grill							
Griddle Burner Rating	20,000 BTU	Gas Supply	7" W.C. Natural, 11" W.C. Propane							
Grill Burner Rating	18,000 BTU	Electrical Supply	120 VAC 15 amp 60 Hz Single Phase							
Infrared Broiler	17,000 BTU	Shipping Weight	401 Lbs							
Oven Bake Burner	28,000 BTU									

ACCESSORIES & OPTIONS

ACCESSORIES & OFTIONS											
I'' Island back (standard)	ARR36SIB-P	S/S Curb Base	ARR36CB-P	24" Griddle Cover	ARRGDCOV24S-P	Easy Glide Rack 36"	ARR-SR-36-P				
I'' Island back (welded)	ARR36IB-P	12" Griddle Cover	ARRGDSCOV12S-P	24" Grill Cover	ARRGRCOV24-P	Porcelainized Broiler Pan	R31005				
4'' Stub Back	ARR364SB-P	12" Grill Cover	ARR-GRSCOV12-P	12" Cutting Board	ARRCUTB12-P	OPTIONS (FACTORY	INSTALLED)				
21" High Back w/ Shelf	ARR3621HBS-P	12" Griddle Plate	ARRPGP12-P	Wok Adapter	ARRWOK-P	I I'' Flat Griddle Plate	MC11FS-P				
S/S Leg Caps (2)	ARR2LC-P	24" Griddle Plate	ARRPGP24-P	Extra Oven rack 36"	R31014	I I" Grooved Griddle Plate	MCII-GG-P				

^{*} ADJUSTABLE + I"

A manual gas shut-off valve must be installed external to the appliance, in a location accessible from the front, for the purpose of shutting off the gas supply. This is a vented appliance. To be used in conjunction with a suitable vent hood only.

^{**}The American Range Company continually improves its products and reserves the right to change materials, specifications and dimensions without notice. This unit is manufactured for residential use only

