DA 6698 W Puristic Edition 6000
Wall ventilation hood
with energy-efficient LED lighting and touch controls for simple operation.



- Family design – based on Miele built-in appliances
- Unique user convenience – Con@ctivity
- Powerful – 488.52 (830) ft³/min (m3/h) in Booster level
- Energy-efficient and quiet
- Efficient filtration- 10-ply stainless steel grease filters

EAN: 4002516024644 / Material number: 10877060 /
Old Material Number: 28669840USA

General information	
Model number	DA 6698 W Puristic Edition 6000
Manufacturer material number	10877060
EAN number	4002516024644
Design	
Wall ventilation hood	•
Construction type and design	
Color	Obsidian Black
Operating modes	
Recirculated mode	Can be retrofitted
Recirculation conversion kit (order separately)	DUW 20
OdorFree charcoal filter (order separately)	DKF 12-P
User convenience	
Miele@home	•
Electronic controls	•
Con@ctivity	Yes
Power levels (number excl. Intensive)	3
Light-touch controls	•
Operation	Touch-on-glass controls
Booster levels	1
Delayed shutdown for 5 or 15 minutes	•
Grease filter saturation indicator	•
Active charcoal filter saturation indicator	•
Acoustic package	•
CleanCover	•
Smart Extras	
RemoteUpdate	•
Push notifications	•
Smart Home Integration	•
Smart Extras	
Alexa voice control	•
Google voice control	•
Filter system	
Number of dishwasher-safe stainless steel grease filters (10-ply)	3
Lighting	
Number x W	3 x 3 W
Light intensity in Lx	670 lx
Color temperature in K	3500 Kelvin
Light dimmer function	•
Blower	
Dual-action blower	•
Exhaust air	
Air throughput in CFM in Booster	489
Air throughput with Booster level 1 (m³/h) according to EN 61591	488.52 (830)


DA 6698 W Puristic Edition 6000
Wall ventilation hood
with energy-efficient LED lighting and touch controls for simple operation.



EAN: 4002516024644 / Material number: 10877060 /
Old Material Number: 28669840USA

Safety	
Safety shut-off	•
Single-ply safety glass (ESG)	•
Technical data	
Overall hood height for vented mode and external in inches (mm)	28 (710)–40 1/2 (1030)
Overall height for recirculation mode ventilation hoods in mm	33 1/8 (840)– 45 5/8 (1160)
Overall min. height for vented and external in in. (mm)	28 (710)
Overall max. height for vented and external in in. (mm)	40 1/2 (1030)
Overall min. height for recirculation in in. (mm)	33 1/8 (840)
Overall max. height for recirculation in in. (mm)	45 5/8 (1160)
Canopy width in in. (mm)	35 3/8 (898)
Canopy height in in. (mm)	3 3/8 (85)
Electrical plug	NEMA plug: 5–15
Net weight in lbs. (kg)	58 (26.0)
Depth of hood canopy in in. (mm)	19 5/8 (500)
Length of electrical wire in ft (m)	2 (0.8)
Standard plug fitted	•
Minimum height above electric cooktops in mm	24 (610)
Minimum safety distance above gas cooktops (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	26 (660)
Total connected load in kW	0.35
Voltage in V	120
Fuse rating in A	15
Number of phases	1
Frequency in Hz	60
Installation note	
Vent connection at top	•
Diameter of vent connection in in.(mm)	6 (150)
Telescopic chimney	•
Standard accessories	
Non-return flap	•

DA 6698 W Puristic Edition 6000
Wall ventilation hood
with energy-efficient LED lighting and touch controls for simple operation.

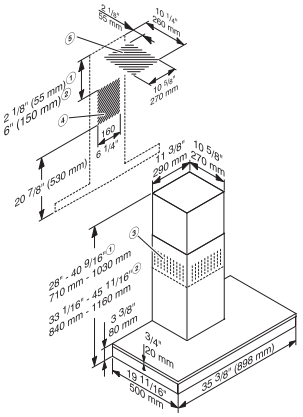

DA 6698 W, CLST (Installation drawing) – USA

1. Extraction, 2. Recirculation, 3 Ventilation grilles at the top for recirculation, 4. + 5. Vent cut-out positions (Area 5 not required for recirculation)