DA 2390
Insert ventilation hood
with energy-efficient LED lighting and backlit controls for easy use.



- Customized kitchen design – fully integrated in 34 3/4 (884) in (mm) width
- Space saving – suitable for narrow wall units from 11.8" deep
- Powerful – 488.52 (830) ft³/min (m3/h) in Booster level
- Efficient filtration- 10-ply stainless steel grease filters
- Safe and easy to clean – Miele CleanCover

EAN: 4002515939932 / Material number: 10743660 /
Old Material Number: 28239055USA

General information	
Model number	DA 2390
Manufacturer material number	10743660
EAN number	4002515939932
Marketing class	Silver
Design	
Insert ventilation hood	•
Construction type and design	
Color	Stainless steel
Operating modes	
Recirculated mode	Can be retrofitted
Recirculation conversion kit (order separately)	DUU 151
OdorFree charcoal filter (order separately)	DKF 19-P
User convenience	
Electronic controls	•
Power levels (number excl. Intensive)	3
Operation	Light-touch switches with LEDs
Booster levels	1
CleanCover	•
Filter system	
Number of dishwasher-safe stainless steel grease filters (10-ply)	2
Lighting	
Number x W	4 x 3 W
Light intensity in Lx	500 lx
Color temperature in K	3000 Kelvin
Blower	
Dual-action blower	•
Exhaust air	
Air throughput in CFM in Booster	489
Air throughput with Booster level 1 (m³/h) according to EN 61591	488.52 (830)
Safety	
Safety shut-off	•
Technical data	
Canopy width in in. (mm)	34 3/4 (884)
Canopy height in in. (mm)	2 1/2 (63)
Electrical plug	NEMA plug: 5–15
Net weight in lbs. (kg)	29 (13.0)
Depth of hood canopy in in. (mm)	11 3/4 (297)
Length of electrical wire in ft (m)	4 (1.5)
Standard plug fitted	•
Minimum height above electric cooktops in mm	24 (610)
Minimum safety distance above gas cooktops (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	26 (660)
Total connected load in kW	0.36
Voltage in V	120
Fuse rating in A	15


DA 2390
Insert ventilation hood
with energy-efficient LED lighting and backlit controls for easy use.



EAN: 4002515939932 / Material number: 10743660 /
Old Material Number: 28239055USA

Number of phases	1
Frequency in Hz	60
Installation note	
Vent connection at top	•
Diameter of vent connection in in.(mm)	6 (150)
Standard accessories	
Non-return flap	•

DA 2390
Insert ventilation hood
with energy-efficient LED lighting and backlit controls for easy use.

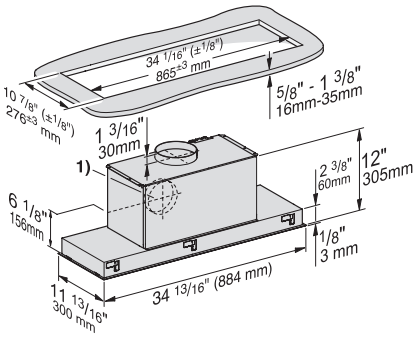

DA2390 (Installation drawing) – US

1) Vent connection alternatively to rear