DA 2628

Insert ventilation hood

with energy-efficient LED lighting and backlit controls for easy use.



- Customized kitchen design – fully integrated in 46 1/2 (1180) in (mm) width
- Unique user convenience – Con@ctivity
- Powerful – 376.69 (640) ft³/min (m3/h) in Booster level
- Elegant and efficient – edge vented panel
- Efficient filtration- 10-ply stainless steel grease filters

EAN: 4002516024439 / Material number: 10876800 /
Old Material Number: 28262855USA

General information	
Model number	DA 2628
Manufacturer material number	10876800
EAN number	4002516024439
Marketing class	Platinum
Design	
Insert ventilation hood	•
Construction type and design	
Color	Stainless steel
Operating modes	
Recirculated mode	Exhaust air
Design	
Edge extraction	•
User convenience	
Miele@home	•
Electronic controls	•
Con@ctivity	Yes
Power levels (number excl. Intensive)	3
Operation	Light-touch switches with LEDs
Booster levels	1
Delayed shutdown for 5 or 15 minutes	•
Grease filter saturation indicator	•
Smart Extras	
Google voice control	•
RemoteUpdate	•
Push notifications	•
Smart Home Integration	•
Smart Extras	
Voice control	•
Cleaning convenience	
Easy to clean canopy interior CleanCover	•
Filter system	
Number of dishwasher-safe stainless steel grease filters (10-ply)	4
Lighting	
Number x W	3 x 4,5 W
Light intensity in Lx	700 lx
Color temperature in K	3500 Kelvin
Light dimmer function	•
Blower	
Dual-action blower	•
Exhaust air	
Air throughput in CFM in Booster	483
Air throughput in Intensive setting (cfm)	482.64 (820)
Safety	
Safety shut-off	•


DA 2628
Insert ventilation hood
with energy-efficient LED lighting and backlit controls for easy use.



EAN: 4002516024439 / Material number: 10876800 /
Old Material Number: 28262855USA

Technical data	
Minimum height above electric hobs in mm	24 (610)
Canopy width in in. (mm)	46 1/2 (1180)
Canopy height in in. (mm)	2 1/2 (63)
Minimum height above gas hobs (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	26 (660)
Electrical plug	NEMA plug: 5–15
Net weight in lbs. (kg)	34 (15.0)
Depth of hood canopy in in. (mm)	11 1/2 (293)
Length of electrical wire in ft (m)	4 (1.5)
Standard plug fitted	•
Total connected load in kW	0.36
Voltage in V	120
Fuse rating in A	15
Number of phases	1
Frequency in Hz	60
Installation note	
Vent connection at top	•
Diameter of vent connection in in.(mm)	6 (150)
Standard accessories	
Non-return flap	•

DA 2628
Insert ventilation hood
with energy-efficient LED lighting and backlit controls for easy use.

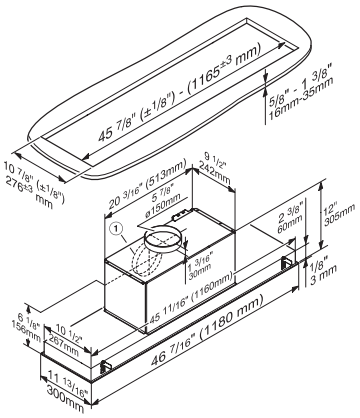

DA 2628, stainless steel – Integrated cooker hood
(Installation drawing) – USA

1) Vent connection alternatively to rear