DA 2698

Insert ventilation hood

with energy-efficient LED lighting and backlit controls for easy use.



- Customized kitchen design – fully integrated in 34 5/8 (880) in (mm) width
- Unique user convenience – Con@ctivity
- Powerful – 376.69 (640) ft³/min (m3/h) in Booster level
- Elegant and efficient – edge vented panel
- Efficient filtration- 10-ply stainless steel grease filters

EAN: 4002516023906 / Material number: 10876810 /
Old Material Number: 28269855USA

General information	
Model number	DA 2698
Manufacturer material number	10876810
EAN number	4002516023906
Marketing class	Platinum
Design	
Insert ventilation hood	•
Construction type and design	
Color	Stainless steel
Operating modes	
Recirculated mode	Can be retrofitted
Recirculation conversion kit (order separately)	DUU 151
OdorFree charcoal filter (order separately)	DKF 19-P
Design	
Edge extraction	•
User convenience	
Miele@home	•
Electronic controls	•
Con@ctivity	Yes
Power levels (number excl. Intensive)	3
Operation	Light-touch switches with LEDs
Booster levels	1
Delayed shutdown for 5 or 15 minutes	•
Grease filter saturation indicator	•
Active charcoal filter saturation indicator	•
CleanCover	•
Smart Extras	
RemoteUpdate	•
Push notifications	•
Smart Home Integration	•
Smart Extras	
Alexa voice control	•
Google voice control	•
Efficiency	
PowerManagement system	•
Filter system	
Number of dishwasher-safe stainless steel grease filters (10-ply)	2
Lighting	
Number x W	4 x 3 W
Light intensity in Lx	650 lx
Color temperature in K	3500 Kelvin
Light dimmer function	•
Blower	
Dual-action blower	•
Exhaust air	
Air throughput in CFM in Booster	483


DA 2698
Insert ventilation hood
with energy-efficient LED lighting and backlit controls for easy use.



EAN: 4002516023906 / Material number: 10876810 /
Old Material Number: 28269855USA

Air throughput with Booster level 1 (m^3/h) according to EN 61591	482.64 (820)
Safety	
Safety shut-off	•
Technical data	
Canopy width in in. (mm)	34 5/8 (880)
Canopy height in in. (mm)	2 1/2 (63)
Electrical plug	NEMA plug: 5–15
Net weight in lbs. (kg)	31 (14.0)
Depth of hood canopy in in. (mm)	11 1/2 (293)
Length of electrical wire in ft (m)	4 (1.5)
Standard plug fitted	•
Minimum height above electric cooktops in mm	24 (610)
Minimum safety distance above gas cooktops (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	26 (660)
Total connected load in kW	0.36
Voltage in V	120
Fuse rating in A	15
Number of phases	1
Frequency in Hz	60
Installation note	
Vent connection at top	•
Diameter of vent connection in in.(mm)	6 (150)
Standard accessories	
Non-return flap	•

DA 2698
Insert ventilation hood
with energy-efficient LED lighting and backlit controls for easy use.

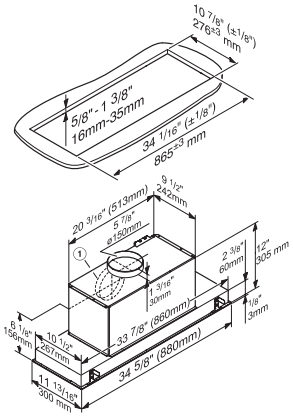

DA 2698 I- Integrated cooker hood (Installation drawing) – US

1) Vent connection alternatively to rear