DA 4248 V D Puristic Varia
Island décor hood
with energy-efficient LED lighting and backlit controls for easy use.



- Timeless design – stainless steel canopy 47 1/8 (1198) in (mm) wide
- Unique user convenience – Con@ctivity
- Motorized chimney
- Powerful – 506.18 (860) ft³/min (m3/h) in Booster level
- Energy-efficient and quiet

EAN: 4002515990162 / Material number: 10877250 /
Old Material Number: 28424855USA

General information	
Model number	DA 4248 V D Puristic Varia
Manufacturer material number	10877250
EAN number	4002515990162
Marketing class	Platinum
Design	
Island ventilation hood	•
Construction type and design	
Color	Stainless steel
Operating modes	
Recirculated mode	Exhaust air
User convenience	
Miele@home	•
Electronic controls	•
Con@ctivity	Yes
Power levels (number excl. Intensive)	3
Operation	Light-touch switches with LEDs
Booster levels	1
Delayed shutdown for 5 or 15 minutes	•
Grease filter saturation indicator	•
Acoustic package	•
Hood in Motion	•
CleanCover	•
Smart Extras	
RemoteUpdate	•
Push notifications	•
Smart Home Integration	•
Smart Extras	
Alexa voice control	•
Google voice control	•
Filter system	
Number of dishwasher-safe stainless steel grease filters (10-ply)	6
Lighting	
Number x W	4 x 3 W
Light intensity in Lx	600 lx
Color temperature in K	3500 Kelvin
Light dimmer function	•
Blower	
Dual-action blower	•
Exhaust air	
Air throughput in CFM in Booster	507
Air throughput with Booster level 1 (m³/h) according to EN 61591	506.18 (860)
Safety	
Safety shut-off	•


DA 4248 V D Puristic Varia
Island décor hood
with energy-efficient LED lighting and backlit controls for easy use.



EAN: 4002515990162 / Material number: 10877250 /
Old Material Number: 28424855USA

Technical data	
Overall min. height for vented and external in in. (mm)	29 3/4 (755)
Overall max. height for vented and external in in. (mm)	41 1/8 (1045)
Canopy width in in. (mm)	47 1/8 (1198)
Canopy height in in. (mm)	2 3/4 (70)
Electrical plug	Without plug
Net weight in lbs. (kg)	109 (49.0)
Depth of hood canopy in in. (mm)	27 1/2 (698)
Hard-wired	•
Minimum height above electric cooktops in mm	24 (610)
Minimum safety distance above gas cooktops (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	26 (660)
Total connected load in kW	0.51
Voltage in V	120
Fuse rating in A	15
Number of phases	1
Frequency in Hz	60
Installation note	
Vent connection at top	•
Diameter of vent connection in in.(mm)	6 (150)
Telescopic chimney	•
Standard accessories	
Non-return flap	•

DA 4248 V D Puristic Varia
Island décor hood
with energy-efficient LED lighting and backlit controls for easy use.

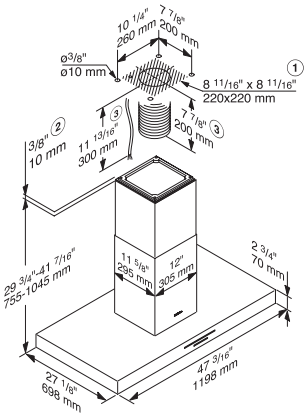

DA 4248 V (Installation drawing) USA

1) Installation area/site, 2) Installation alternatively with spacer frame, 3) A supply lead, and for vented mode flexible vent ducting, must be pre-fitted for the connection in the ceiling to the connection of the cooker hood.