DA 6698 D Puristic Version 6000
Island décor hood
with energy-efficient LED lighting and touch controls for simple operation.



- Family design – based on Miele built-in appliances
- Unique user convenience – Con@ctivity
- Powerful – 506.18 (860) ft³/min (m3/h) in Booster level
- Energy-efficient and quiet
- Efficient filtration- 10-ply stainless steel grease filters

EAN: 4002516024651 / Material number: 10877210 /
Old Material Number: 28669855USA

General information	
Model number	DA 6698 D Puristic Version 6000
Manufacturer material number	10877210
EAN number	4002516024651
Design	
Island ventilation hood	•
Construction type and design	
Color	Stainless steel
Operating modes	
Recirculated mode	Can be retrofitted
Recirculation conversion kit (order separately)	DUI 32
OdorFree charcoal filter (order separately)	DKF 12-P
User convenience	
Miele@home	•
Electronic controls	•
Con@ctivity	Yes
Power levels (number excl. Intensive)	3
Light-touch controls	•
Operation	Touch-on-glass controls
Booster levels	1
Delayed shutdown for 5 or 15 minutes	•
Grease filter saturation indicator	•
Active charcoal filter saturation indicator	•
Acoustic package	•
CleanCover	•
Smart Extras	
RemoteUpdate	•
AutoRefresh	•
Push notifications	•
Smart Home Integration	•
Smart Extras	
Alexa voice control	•
Google voice control	•
Filter system	
Number of dishwasher-safe stainless steel grease filters (10-ply)	3
Lighting	
Number x W	4 x 3 W
Light intensity in Lx	820 lx
Color temperature in K	3500 Kelvin
Light dimmer function	•
Blower	
Dual-action blower	•
Exhaust air	
Air throughput in CFM in Booster	507
Air throughput with Booster level 1 (m³/h) according to EN 61591	506.18 (860)


DA 6698 D Puristic Version 6000
Island décor hood
with energy-efficient LED lighting and touch controls for simple operation.



EAN: 4002516024651 / Material number: 10877210 /
Old Material Number: 28669855USA

Safety	
Safety shut-off	•
Single-ply safety glass (ESG)	•
Technical data	
Overall min. height for vented and external in in. (mm)	27 3/4 (705)
Overall max. height for vented and external in in. (mm)	39 5/8 (1005)
Overall min. height for recirculation in in. (mm)	30 1/8 (765)
Overall max. height for recirculation in in. (mm)	42 3/8 (1075)
Canopy width in in. (mm)	35 3/8 (898)
Canopy height in in. (mm)	3 3/8 (85)
Electrical plug	Without plug
Net weight in lbs. (kg)	78 (35.0)
Depth of hood canopy in in. (mm)	23 1/2 (598)
Hard-wired	•
Minimum height above electric cooktops in mm	24 (610)
Minimum safety distance above gas cooktops (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	26 (660)
Total connected load in kW	0.36
Voltage in V	120
Fuse rating in A	15
Number of phases	1
Frequency in Hz	60
Installation note	
Vent connection at top	•
Diameter of vent connection in in.(mm)	6 (150)
Telescopic chimney	•
Standard accessories	
Non-return flap	•

DA 6698 D Puristic Version 6000
Island décor hood
with energy-efficient LED lighting and touch controls for simple operation.

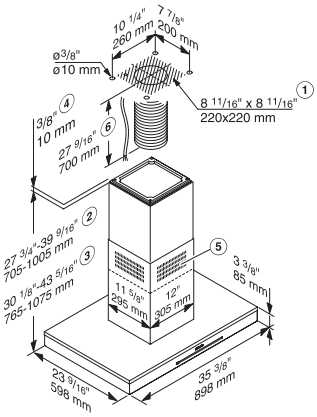

DA 6698 D, CLST (Installation drawing) – USA

1) Extraction cut-out, 2) Extraction, 3) Recirculation, 4) Installation option with spacer frame, 5) Ventilation grille at the top for recirculation, 6) A mains cable and, for extraction mode, flexible exhaust ducting is required from the ceiling connection to the connection on the cooker hood., ,