PUR 88 W
30-inch wall-mounted ventilation hood
with energy-efficient LED lighting and backlit controls for easy use.



- Timeless design – stainless steel canopy 29 1/2 (748) in (mm) wide
- Powerful – 512.06 (870) ft³/min (m3/h) in Booster level
- Efficient filtration- 10-ply stainless steel grease filters
- Safe and easy to clean – Miele CleanCover
- Suitable for every home – vented or recirculating

EAN: 4002515941638 / Material number: 10743170 /
Old Material Number: 28428654USA

General information	
Model number	PUR 88 W
Manufacturer material number	10743170
EAN number	4002515941638
Marketing class	Silver
Design	
Wall ventilation hood	•
Construction type and design	
Color	Stainless steel
Operating modes	
Recirculated mode	Can be retrofitted
Recirculation conversion kit (order separately)	DUW 20
OdorFree charcoal filter (order separately)	DKF12-900
User convenience	
Electronic controls	•
Power levels (number excl. Intensive)	3
Operation	Light-touch switches with LEDs
Booster levels	1
CleanCover	•
Filter system	
Number of dishwasher-safe stainless steel grease filters (10-ply)	2
Lighting	
Number x W	2 x 3 W
Light intensity in Lx	330 lx
Color temperature in K	3000 Kelvin
Blower	
Dual-action blower	•
Exhaust air	
Air throughput in CFM in Booster	510
Air throughput with Booster level 1 (m³/h) according to EN 61591	512.06 (870)
Safety	
Safety shut-off	•
Technical data	
Overall hood height for vented mode and external in inches (mm)	27 (685)–39 5/8 (1005)
Overall height for recirculation mode ventilation hoods in mm	32 1/8 (815)–44 5/8 (1135)
Overall min. height for vented and external in in. (mm)	27 (685)
Overall max. height for vented and external in in. (mm)	39 5/8 (1005)
Overall min. height for recirculation in in. (mm)	32 1/8 (815)
Overall max. height for recirculation in in. (mm)	44 5/8 (1135)
Canopy width in in. (mm)	29 1/2 (748)
Canopy height in in. (mm)	2 1/2 (62)
Electrical plug	NEMA plug: 5–15
Net weight in lbs. (kg)	51 (23.0)
Depth of hood canopy in in. (mm)	19 5/8 (500)


PUR 88 W
30-inch wall-mounted ventilation hood
with energy-efficient LED lighting and backlit controls for easy use.



EAN: 4002515941638 / Material number: 10743170 /
Old Material Number: 28428654USA

Length of electrical wire in ft (m)	4 (1.5)
Standard plug fitted	•
Minimum height above electric cooktops in mm	24 (610)
Minimum safety distance above gas cooktops (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	26 (660)
Total connected load in kW	0.35
Voltage in V	120
Fuse rating in A	15
Number of phases	1
Frequency in Hz	60
Installation note	
Vent connection at top	•
Diameter of vent connection in in.(mm)	6 (150)
Telescopic chimney	•
Standard accessories	
Reducer from 150 to 125 mm Ø	•
Non-return flap	•

PUR 88 W
30-inch wall-mounted ventilation hood
with energy-efficient LED lighting and backlit controls for easy use.

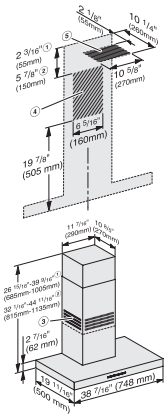

PUR88W, DAP1727 (Installation drawing) – USA/CDN

1) Extraction, 2) Recirculation, 3) Ventilation grille at top for recirculation, 4+5) Installation cut-out (5 not required for recirculation)