


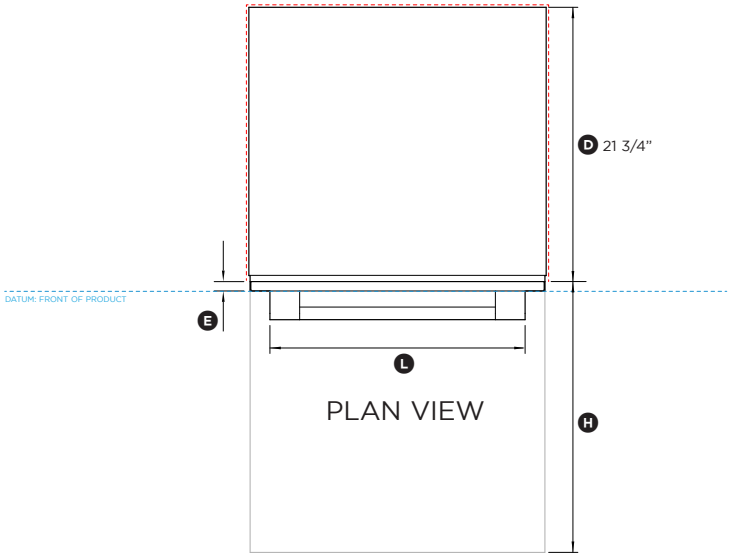


PLAN VIEW

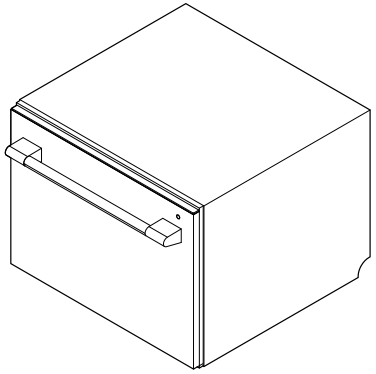


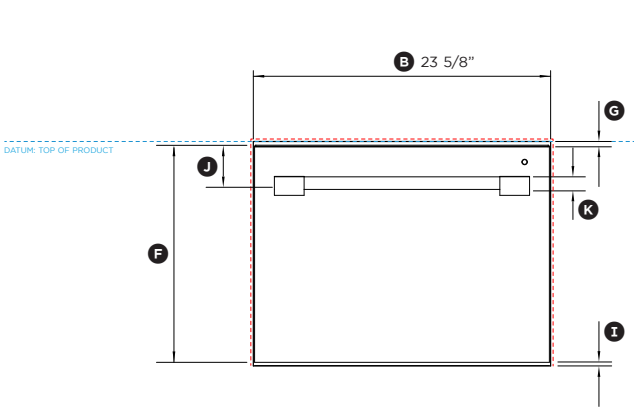

FRONT VIEW

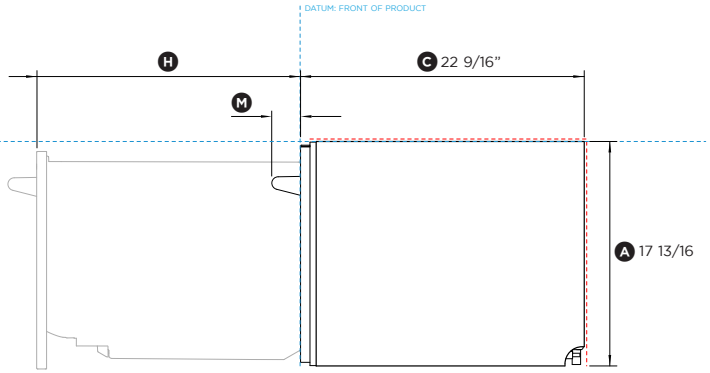

PROFILE VIEW



FISHER & PAYKEL

DATA SHEET
24" SINGLE DISHDRAWER™ DISHWASHER

Model no:
DD24STX6PX1
(refer page 2 for metric measurements)

Product Dimensions	**In**
Ⓐ Overall height of product	17 13/16"
Ⓑ Overall width of product	23 5/8"
Ⓒ Overall depth of product (excl. handle)	22 9/16"
Ⓓ Depth of chassis	21 3/4"
Ⓔ Depth of drawer front panel	13/16"
Ⓕ Height of drawer front panels	17 3/8"
Ⓖ Height from top of drawer front panel to top of chassis	1/8"
Ⓗ Maximum extension of drawer	21 9/16"
Ⓘ Ventilation gap below drawer front panel	1/4"
Ⓙ Height from top drawer panel to centre of handle rail	3 3/16"
Ⓚ Handle thickness (not including standoffs)	1"
Ⓛ Handle width (including standoffs)	20 1/4"
Ⓜ Handle depth measured from front of drawer	2 1/4"

Minimum Clearances	**In**
Minimum inside height of cavity	17 15/16"
Minimum inside width of cavity	23 5/8"
Minimum overall depth of cavity*	22 3/4"
Minimum clearance to adjacent cupboard door	1/16"
Minimum clearance to corner cupboard	1/2"

*including 11/16" (18mm) door panels on adjacent cabinetry

Electrical requirements	110-120 VAC max. 15 A
Water pressure	
Water softener models	max. 1 MPa (145 psi), min. 0.1 MPa (14.5 psi)
Non-water softener models	max. 1 MPa (145 psi), min. 0.03 MPa (4.3 psi)


PRODUCT DATUM
INDICATES CABINETRY CLEARANCES

DATE: 31.03.2022


IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com


FISHER & PAYKEL

DATA SHEET
24" SINGLE DISHDRAWER™ DISHWASHER

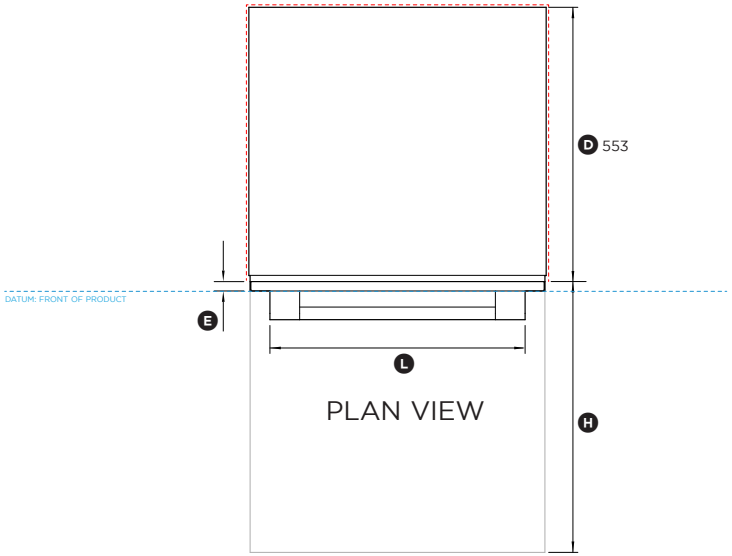


PLAN VIEW

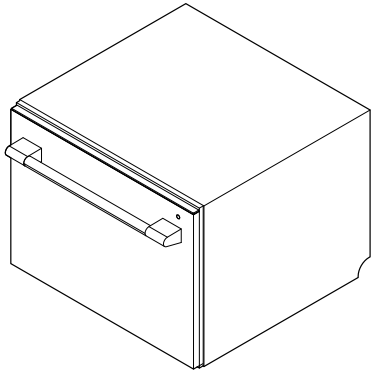

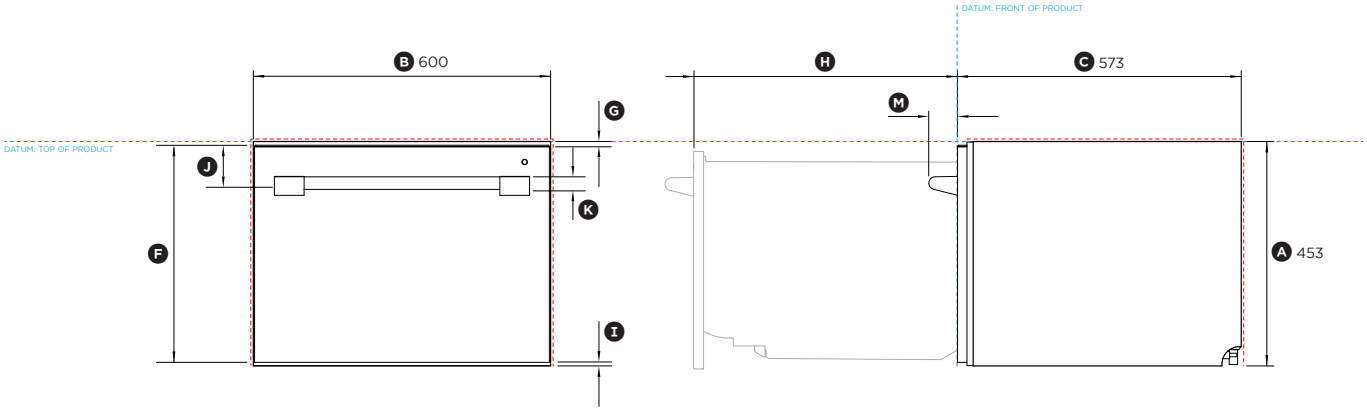

FRONT VIEW

PROFILE VIEW



Model no:
DD24STX6PX1
(refer page 1 for imperial measurements)

Product Dimensions	**mm**
(A) Overall height of product	453
(B) Overall width of product	600
(C) Overall depth of product (excl. handle)	573
(D) Depth of chassis	553
(E) Depth of drawer front panel	20
(F) Height of drawer front panels	442
(G) Height from top of drawer front panel to top of chassis	3
(H) Maximum extension of drawer	547
(I) Ventilation gap below drawer front panel	7
(J) Height from top drawer panel to centre of handle rail	81
(K) Handle thickness (not including standoffs)	25
(L) Handle width (including standoffs)	515
(M) Handle depth measured from front of drawer	58

Minimum Clearances	**mm**
Minimum inside height of cavity	456
Minimum inside width of cavity	600
Minimum overall depth of cavity*	578
Minimum clearance to adjacent cupboard door	2
Minimum clearance to corner cupboard	13

*including 11/16" (18mm) door panels on adjacent cabinetry

Electrical requirements	110-120 VAC max. 15 A
Water pressure	
Water softener models	max. 1 MPa (145 psi), min. 0.1 MPa (14.5 psi)
Non-water softener models	max. 1 MPa (145 psi), min. 0.03 MPa (4.3 psi)

PRODUCT DATUM ----------
INDICATES CABINETRY CLEARANCES ----------

DATE: 31.03.2022

IMPORTANT NOTE: Throughout this guide, dimensions may vary by **±**2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com