H 7660 BP AM
24" oven
in a perfectly combinable design with roast probe and BrilliantLight.



- Touch display with proximity sensor – M Touch S + MotionReact
- Minimal cleaning effort – Self Clean equipment& Self Clean ready
- Especially fluffy dough and nicely browned crusts – Moisture Plus
- Ensures your food won't overcook – TasteControl
- Network-enabled WiFi appliance – Miele@home

EAN: 4002516483823 / Material number: 11804810 /
Old Material Number: 22766045USA

General information	
Model number	H 7660 BP AM
Manufacturer material number	11804810
EAN number	4002516483823
Marketing class	Platinum
Construction type and design	
Color	Stainless steel/Clean Touch Steel
PureLine	•
Appliance type and design	
Oven	•
Convenience features	
TasteControl	•
Rapid PreHeat	•
Roast probe	wired
Keep-warm function	•
Crisp Function	•
Operating modes	
Convection Bake	•
Surround	•
Moisture Plus	•
Moisture Plus with AutoRoast	•
Moisture Plus with Convection Bake	•
Moisture Plus with Intensive	•
Moisture Plus with Surround	•
Intensive Bake	•
Auto roast	•
Convection Broil	•
Maxi Broil	•
Broil	•
Browning	•
Bake	•
Slow roast	•
Defrost	•
Automatic programs	•
Special modes	•
User convenience	
Networking with Miele@home	•
Control panel	M Touch S Display
SoftOpen	•
SoftClose	•
MultiLingua	•
MyMiele	•
Show me how	•
Timed bursts of steam	•
Time of day display	•
Time synchronization	•
Date display	•

H 7660 BP AM
24" oven
in a perfectly combinable design with roast probe and BrilliantLight.



EAN: 4002516483823 / Material number: 11804810 /
Old Material Number: 22766045USA

Minute minder	•
Programming start of cooking duration	•
Programming end of cooking duration	•
Programmable cooking time	•
Actual temperature display	•
Audible signal when desired temperature is reached	•
Default temperature	•
Favorites	•
Sabbath program	•
Individual settings	•
Intake pipe for collecting water	•
Smart Extras	
Recipes	•
Smart Extras	
Push notifications	•
RemoteUpdate	•
Voice control	•
Google voice control	•
Smart Home Integration	•
Efficiency	
Automatic residual heat utilization	•
Cleaning convenience	
Clean Touch Steel surface	•
Self-cleaning	•
Foldable broil heater element	•
CleanGlass door	•
Steam technology/water supply	
Steam generator power in kW	1.10
Fresh water container volume in l	0.3
Intake pipe for collecting water	•
Safety	
Appliance cooling system and cool touch front	•
Safety cut-out	•
System lock	•
Door lock during self cleaning	•
Sensor lock	•
Technical data	
Cavity volume in cu.ft (l)	2.97 (84)
No. of rack levels	5
Labeling of rack levels	•
Electrical plug	NEMA plug: 14–30
Oven interior lighting	1 halogen spot
Temperatures in °F (°C)	85-575 (30-300)
Niche width min. in inches (mm)	22 (560)
Niche width max. in inches (mm)	22 3/8 (568)
Niche height min. in inches (mm)	23 1/4 (590)
Niche height max. in inches (mm)	23 3/8 (595)
Niche depth in in. (mm)	21 5/8 (550)


H 7660 BP AM
24" oven
in a perfectly combinable design with roast probe and BrilliantLight.



EAN: 4002516483823 / Material number: 11804810 /
Old Material Number: 22766045USA


Appliance dimensions (W x H x D) in inches (mm)	23 1/2 (595) x 23 1/2 (596) x 22 1/2 (569)
Weight in lbs. (kg)	103 (46.5)
Weight in lbs. (kg)	102.52 (46.5)
Weight in lbs. (kg)	103 (46.5)
Total connected load in kW	5.40
Power Rating in V	120
Voltage in V	240/208
Frequency in Hz	60
Fuse rating in A	30
Number of phases	1
Length of power cord in m	1.80
Standard accessories	
Universal tray with PerfectClean HUBB 71	1
Self Clean ready baking and roasting rack	2
Self-Clean-ready FlexiClip telescopic runners (pair)	1
Wired food probe	1
Removable Self Clean-ready side racks (pair)	1
Grilling and roasting insert with PerfectClean	1
Descaling tablets	2
Available display languages	
Available display languages via MultiLingua	□□□□□□□□, □□, □□□□, deutsch, dansk, english, suomi, français, ελληνικά, italiano, □□□□, □□□, hrvatski, bahasa malaysia, nederlands, norsk, polski, português, română, русский, svenska, srpski, slovenčina, slovenščina, español, čeština, türkçe, українська, magyar

H 7660 BP AM
24" oven
in a perfectly combinable design with roast probe and BrilliantLight.

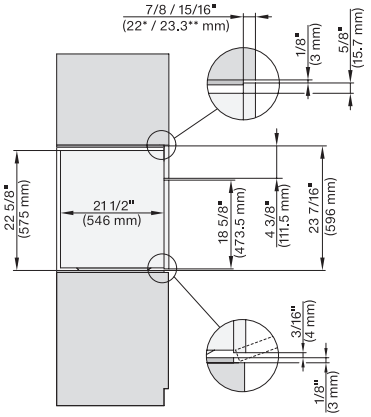


side view, 30 inch Flush inset 650S, installation drawing, NA

7/8" – 22* mm – Glas, 15/16" – 23.3** mm – Edelstahl

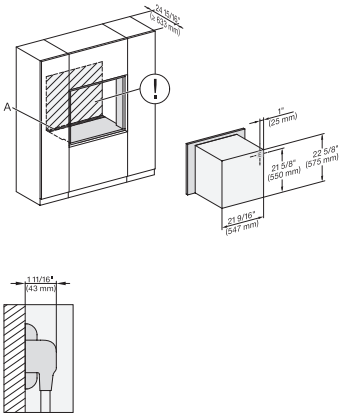


installation 30 inch Flush inset 650S, installation drawing, NA

A – Cut-out (1 9/16" x 19 11/16" / 40 mm x 500 mm) in the bottom of the cabinet for power cord and ventilation, – Electrical and water supplies are recommended to be placed in adjacent cabinetry., Additional cabinet depth is required when placing the electrical and water supplies behind the appliance., E = Electric connection

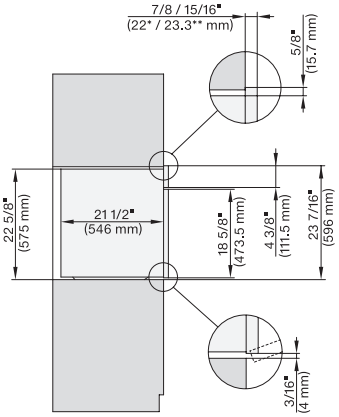


side view 30 inch Proud 650S, installation drawing, NA

7/8" – 22* mm – Glas, 15/16" – 23.3** mm – Edelstahl

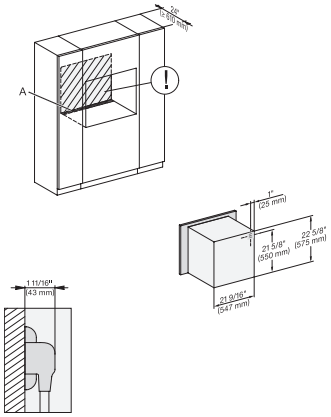


installation 30 inch Proud 650S, installation drawing, NA

A – Cut-out (1 9/16" x 19 11/16" / 40 mm x 500 mm) in the bottom of the cabinet for power cord and ventilation, – Electrical and water supplies are recommended to be placed in adjacent cabinetry., Additional cabinet depth is required when placing the electrical and water supplies behind the appliance., E = Electric connection

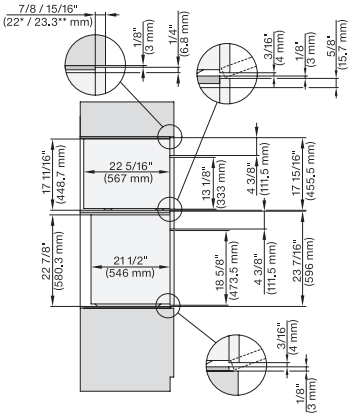

DGC6x00-1+EBA 6808, H 6560B+EBA 6808, H 6x60 BP+EBA6808, DGC7xxx, H7xxx, EBA78x8 Combi, Install. drawi., Flush inset, NA


7/8" – 22* mm – Glas, 15/16" – 23.3** mm – Edelstahl

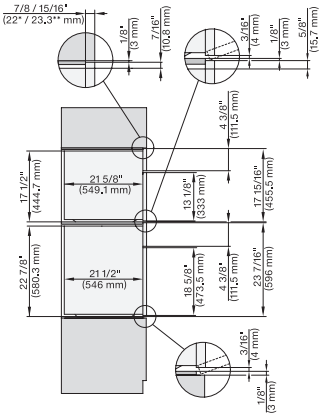

H 6560 B + EBA 6808, H 6x60 BP + EBA 6808, H 6x00 BM + EBA 6808, H7xxx, EBA 78x8 Combi, Install drawing, Flush inset, NA


7/8" – 22* mm – Glas, 15/16" – 23.3** mm – Edelstahl

H 7660 BP AM
24" oven
in a perfectly combinable design with roast probe and BrilliantLight.

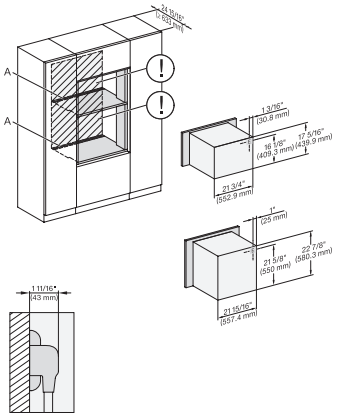


H 6560 B + EBA 6808, H 6x60 BP + EBA 6808, H 6x00 BM, H 7xxx, EBA 78x8, Installation drawing, Flush inset, NA

A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation, – Electrical and water supplies are recommended to be placed in adjacent cabinetry., Additional cabinet depth is required when placing the electrical and water supplies behind the appliance., E = Electric connection

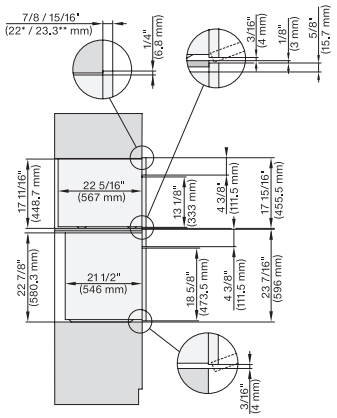


DGCxxxx-1+EBAx8x8, H6560B+EBA6808, HxxxxBP+EBAx8x8, Combi, Installation Drawing, Proud, Flush inset, NA

7/8“ – 22* mm – Glas, 15/16“ – 23.3** mm – Edelstahl

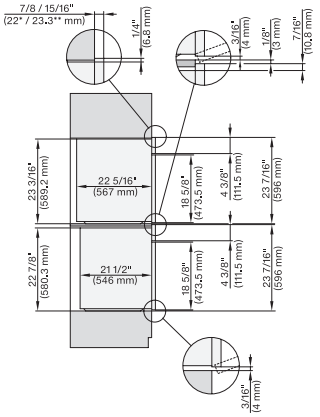


DGC6x6x(AM)+EBA6808, H6560B+EBA6808, H6x60BP+EBA6808, (DGC786x, H7x6xBP)+EBA7868, Combi, Installation drawing, Proud, NA

7/8“ – 22* mm – Glas, 15/16“ – 23.3** mm – Edelstahl

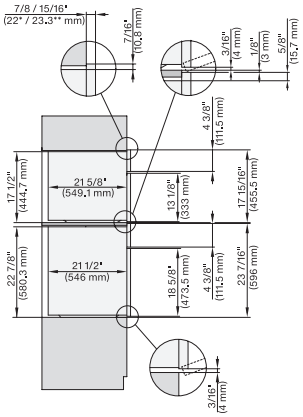


H 6560 B + EBA 6808, H 6x60 BP + EBA 6808, H 6x00 BM + EBA 6808, H7xxx+EBA7x7x, Combi, Installation drawing, Proud, NA

7/8“ – 22* mm – Glas, 15/16“ – 23.3** mm – Edelstahl

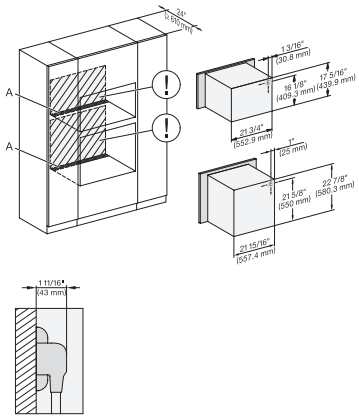


H 6560 B + EBA 6808, H 6x60 BP + EBA6808, H6x00BM + EBA6808, NA7000 Installation Combi, Installation drawing, Proud, NA

A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation, – Electrical and water supplies are recommended to be placed in adjacent cabinetry., Additional cabinet depth is required when placing the electrical and water supplies behind the appliance., E = Electric connection

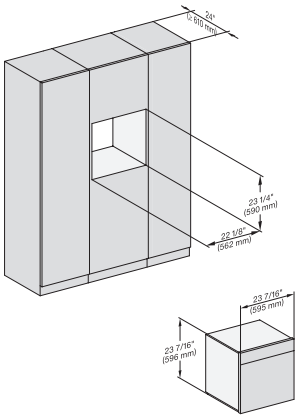


installation Proud 650S, installation drawing, NA

H 7660 BP AM
24" oven
in a perfectly combinable design with roast probe and BrilliantLight.

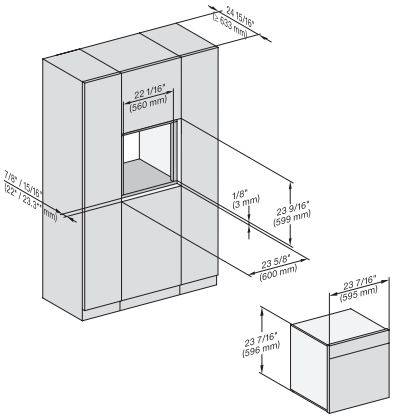


installation Flush inset 650S, installation drawing, NA

7/8“ – 22* mm – Glass, 15/16“ – 23.3** mm – Stainless steel

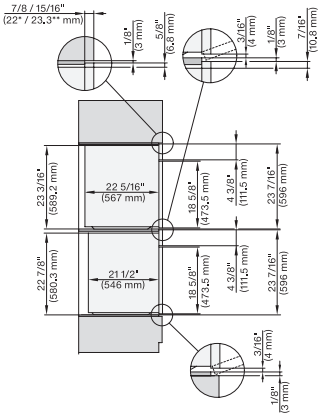


DGC786x(+EBA7848), H7x6xBP(+EBA7848), side view, 30 Zoll, Flush inset, combi, XXL, 650S

7/8“ – 22* mm – Glass, 15/16“ – 23.3** mm – Stainless steel

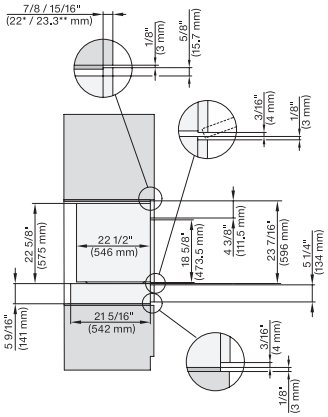


side view, Flush inset, combi, 650S, ESW

7/8“ – 22* mm – Glass, 15/16“ – 23.3** mm – Stainless steel

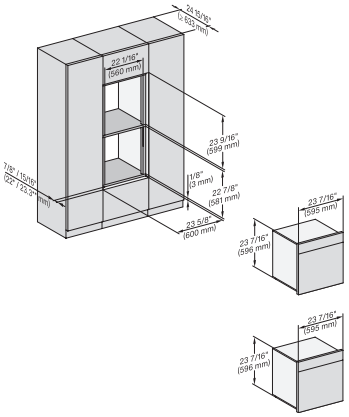


Installation Flush inset, combi, DGC XXL 650S

7/8“ – 22* mm – Glass, 15/16“ – 23.3** mm – Stainless steel, DGC: Minimum installation height 36” – 914 mm from floor to the device installation surface

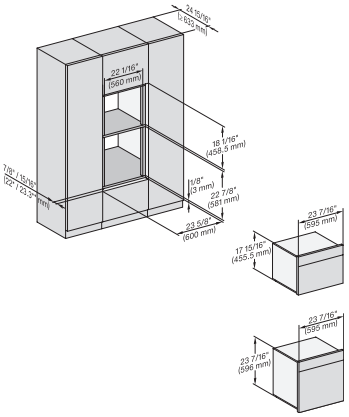

Installation Flush inset, combi, 650S, 450S


7/8“ – 22* mm – Glass, 15/16“ – 23.3** mm – Stainless steel, DGC: Minimum installation height 36” – 914 mm from floor to the device installation surface,

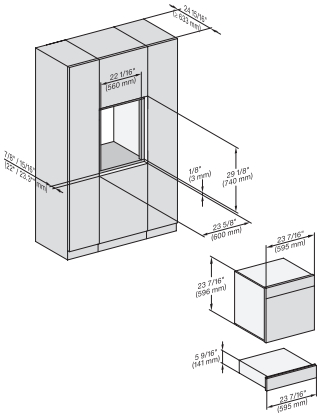

Installation Flush inset, combi, 650S, ESW


7/8“ – 22* mm – Glass, 15/16“ – 23.3** mm – Stainless steel

H 7660 BP AM
24" oven
in a perfectly combinable design with roast probe and BrilliantLight.

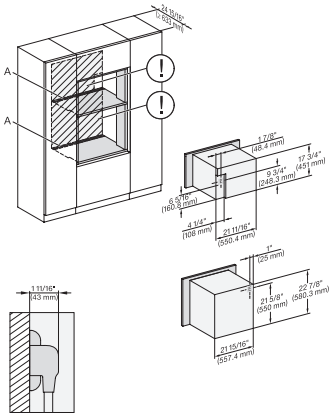


DGC7x4x(+EBA7848), H7x6xBP(+EBA7848), Installation, 30 Zol, Flush inset, combi, XL, 650S

A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation, – Electrical and water supplies are recommended to be placed in adjacent cabinetry., Additional cabinet depth is required when placing the electrical and water supplies behind the appliance., E = Electric connection

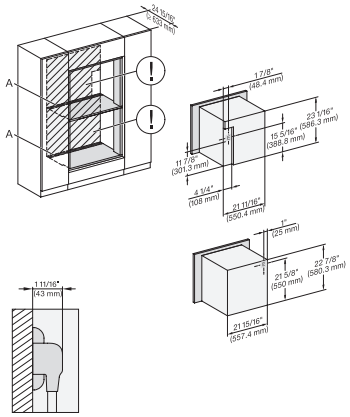


DGC786x+EBA7868, H7x6xBP(+EBA7848), Instllation, 30 Zoll, Flush inset, combi, XXL, 650S

A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation, – Electrical and water supplies are recommended to be placed in adjacent cabinetry., Additional cabinet depth is required when placing the electrical and water supplies behind the appliance., E = Electric connection

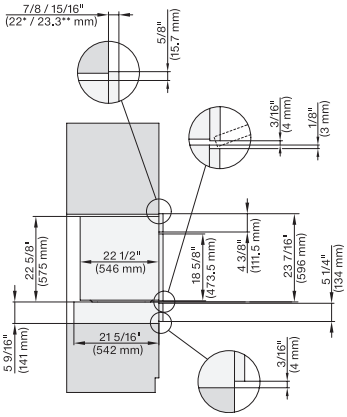


side view, Proud, combi, 650S, ESW

7/8“ – 22* mm – Glass, 15/16“ – 23.3** mm – Stainless steel

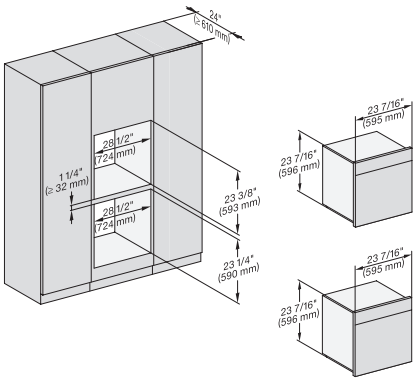


Installation Proud, combi, DGC XXL, 650S

DGC: Minimum installation height 36” – 914 mm from floor to the device installation surface

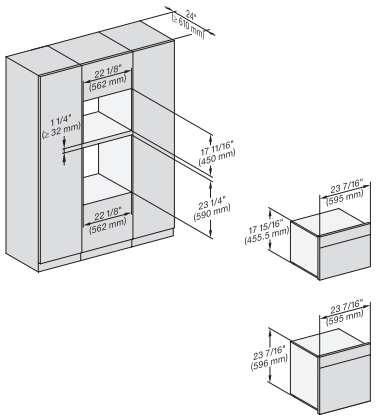


Installation Proud, combi, 650S, 450S

DGC: Minimum installation height 36” – 914 mm from floor to the device installation surface

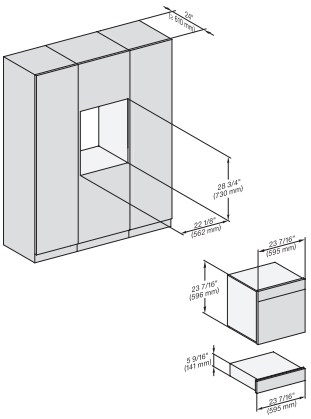


Installation Proud, combi, 650S ESW

H 7660 BP AM
24" oven
in a perfectly combinable design with roast probe and BrilliantLight.

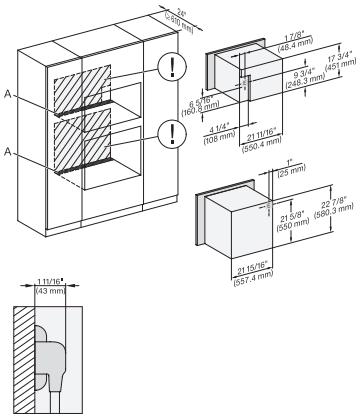

DGC7x4x(+EBA7848), H7x6x(+EBA7848), Installation, 30 Zoll, Proud, combi, XL, 650S

A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation, – Electrical and water supplies are recommended to be placed in adjacent cabinetry., Additional cabinet depth is required when placing the electrical and water supplies behind the appliance., E = Electric connection



Handle H72xx, H76xx, H78xx, PureLine – NA7000 - Installation drawing

H2880BP, H7270BM, H7670BM, H7870BM, H7280BP, H7680BP, H7880BP, H7880BP2:, ? 19 11/16" / 500 mm, ? 17 1/2" / 444 mm, ? 1 7/8 " / 47 mm, ? 15/16" / 24 mm, ? 1 1/4 " / 32,5 mm, ? 2 9/16“ / 65 mm, , H7240BM, H7640BM, H7840BM, H7263BP, H7660BP:, ? 15 3/4“ / 400 mm, ? 14 3/16“ / 360 mm, ? 1 7/8“ / 47 mm, ? 15/16“ / 24 mm, ? 1 1/4“ / 32,5 mm, ? 2 9/16“ / 65 mm