HR 1622-3 I
30" Range
All Electric model with induction cooktop and M Touch.



- State-of-the-art cooktop technology – four induction cooking zones
- Perfect baking and roasting results – Moisture plus
- Ergonomic and easy operation – motorized lift-up control panel
- Precise cooking temperature – Wireless Precision Probe

EAN: 4002516486640 / Material number: 11791520 /
Old Material Number: 25162281USA

General information	
Model number	HR 1622-3 I
Manufacturer material number	11791520
EAN number	4002516486640
Marketing class	Diamond
Heating type	
Electric/Induction	•
Cooktop	Induction
Construction type and design	
Range	•
Appliance width in inches	30
Oven display	M Touch
Appliance color	Stainless steel/Clean Touch Steel
Convenience features	
Wireless Precision Probe	•
Keep-warm function	•
Crisp function	•
Operating modes	
Surround	•
Maxi Broil	•
Moisture Plus	•
Booster	•
Convection Bake	•
Convection Roast	•
Intensive Bake	•
Auto roast	•
Convection Broil	•
Broil	•
Browning	•
Bake	•
Slow roast	•
Defrost	•
Special modes	•
Cooktop features	
Heating type	Induction
Number of induction cooking zones	4
Number of cooking zones with Booster function	4 cooking zones
Number of cooking zones with TwinBooster	2 cooking zones
Power level display	1 - 9
Number of cooking zones with keeping warm function	4 rings
Number of vario cooking zones	4 rings
Residual heat indicator	•
User convenience	
Networking with Miele@home	•
MotionReact proximity sensor	•
Precision knobs	•
Illuminated knob	•

HR 1622-3 I
30" Range
All Electric model with induction cooktop and M Touch.



EAN: 4002516486640 / Material number: 11791520 /
Old Material Number: 25162281USA

SoftClose oven door/ SoftOpen	•
ComfortSwivel handle	•
Motorized lift-up control panel	•
Time synchronization	•
Automatic switch-off	•
MultiLingua	•
Acoustic signal when desired temperature is reached	•
MyMiele	•
Timed bursts of steam	•
Time of day display	•
Date display	•
Minute minder	•
Programmable cooking time	•
Sabbath and Yom Tov programs	•
Actual temperature display	•
Default temperature	•
Favorites	•
Individual settings	•
Oven compartment	
Oven cavity volume in cu. ft. (l)	4.59 (130) ft³ (l)
Number of oven shelf levels	6
No. of halogen lamps	double
TwinPower hot air fans	•
Efficiency	
Automatic residual heat utilization	•
Energy-saving lighting circuit	•
Cleaning convenience	
Stainless-steel front with partial Clean Touch Steel finish	•
Oven with self-cleaning program	•
Cooktop surface	Ceramic surface
CleanGlass door	•
Safety	
Appliance cooling system and cool touch front	•
Safety cut-out	•
System lock	•
Door contact switch	•
Door lock during self cleaning	•
Technical data	
Appliance height min in in.(mm)	35 5/8 (902)
Dimensions (depth) in in. (mm) with bullnose	27 3/4 (702)
Appliance height max in in.(mm)	37 1/8 (940)
Frequency in Hz	60
Electrical plug	NEMA plug: 14–50
Fresh water connection for Moisture Plus	•
Plumbed water connection for Moisture Plus	1.5
Appliance width in in. (mm)	30 (762)
Power Rating in V	120
Voltage in V	240/208


HR 1622-3 I
30" Range
All Electric model with induction cooktop and M Touch.



EAN: 4002516486640 / Material number: 11791520 /
Old Material Number: 25162281USA


Fuse rating in A	50
Number of phases	1
Standard accessories	
Anti-splash insert	1
Self Clean ready baking and roasting rack	2
Self clean ready baking and roasting racks with rail system	1
Side racks self clean ready	1
PerfectClean perforated baking tray	1

HR 1622-3 I
30" Range
All Electric model with induction cooktop and M Touch.

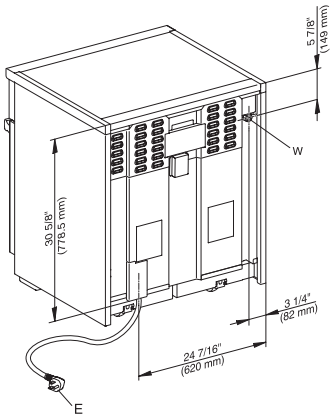


HR1622, HR1622-2, HR1622-3i (Installation drawing)

E = Electric connection, W = Water connection

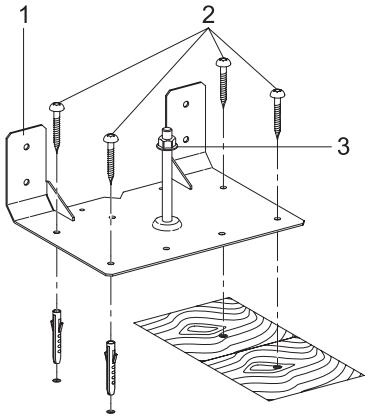


HR11xx, HR19xx, HR 17xx – Installation drawing

1 Anti-tip device , 2 Screws, 3 Locking nut

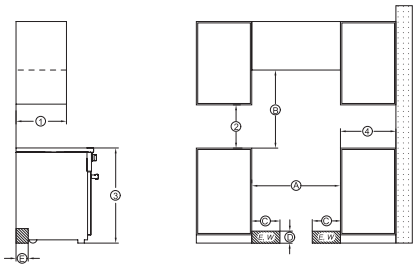


HR1422-3i, HR1622-3i, HR1432-3i, HR1632-3i – Installation drawing

? Maximum depth of top cabinet , ? Minimum distance to bottom edge of top cabinet , ? Distance from the floor to cooktop surface, ? Minimum distance to combustible surfaces , , E = Electric connection , W = Water connection, , (A) Width of cabinet opening , (B) Minimum distance between the top of the cooking area and the bottom of an unprotected combustible surface., Minimum distance to a protected combustible surface or when a Miele Ventilation Hood is installed. For all other, Hoods please consult the manufacturer's specifications for required distances., (C) Maximum connection width right and left , (E) Maximum connection height

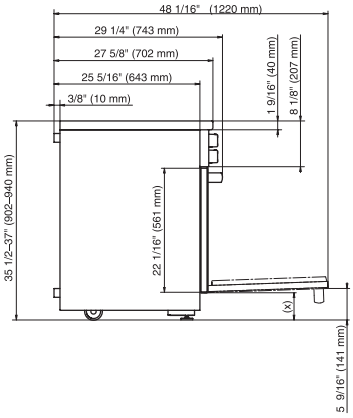


HR1622-3i Side view, (*Fußnote) installation drawing

(x) = Toe-kick height adjustment 5" – 6 1/2" (127 mm – 165.1 mm)

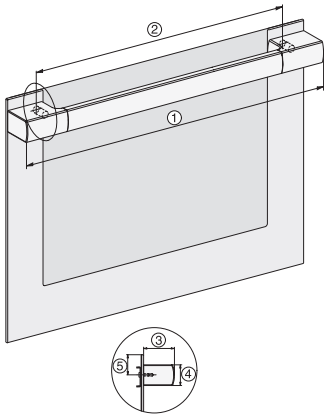

HR11xx-3, HR14xx-3, HR16xx-3i, HR17xx-3, HR19xx-3 installation drawings


30", ? 20 ¾" / 527,6 mm, ? 16 5/8" / 422,6 mm, ? 2 ½" / 64 mm, ? 1 11/16" / 43 mm, ? 1 11/16" / 42,5 mm, , 36", ? 28 9/16" / 725 mm, ? 22 5/8" / 575 mm, ? 2 ½" / 64 mm, ? 1 11/16" / 43 mm, ? 1 11/16" / 42,5 mm

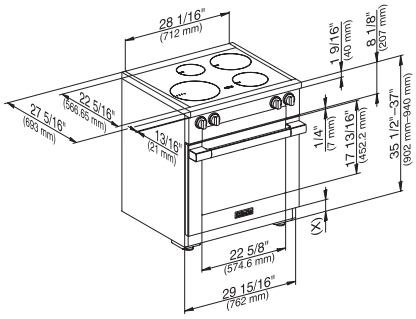

HR1622-3i (installation drawing)

(x) = Toe-kick height adjustment 5" – 6 1/2" (127 mm – 165.1 mm)

HR 1622-3 I
30" Range
All Electric model with induction cooktop and M Touch.

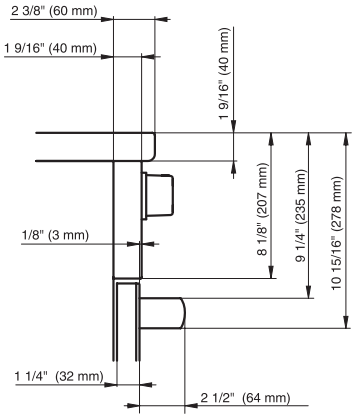

HR1622-3i, HR1632-3i (installation drawing)