# HR 1934-3 G DF
## 36" Range
## Dual Fuel model with M Touch controls



- Network-enabled WiFi appliance – Miele@home
- Plenty of space for cooking – six powerful burners
- Perfect baking and roasting results – Moisture plus
- Ergonomic and easy operation – motorized lift-up control panel
- Precise cooking temperature – Wireless Precision Probe

EAN: 4002516486770 / Material number: 11791570 /
Old Material Number: 25193481USA

| | |
|---|---|
| **General information** | |
| Model number | HR 1934-3 G DF |
| Manufacturer material number | 11791570 |
| EAN number | 4002516486770 |
| Marketing class | Diamond |
| **Heating type** | |
| Dual fuel | • |
| Gas type | Natural gas |
| **Construction type and design** | |
| Range | • |
| Appliance width in inches | 36 |
| Oven display | M Touch |
| Appliance color | Stainless steel/Clean Touch Steel |
| **Convenience features** | |
| Wireless Precision Probe | • |
| Keep-warm function | • |
| Crisp function | • |
| **Operating modes** | |
| Defrost | • |
| Auto roast | • |
| Maxi Broil | • |
| Broil | • |
| Convection Bake | • |
| Convection Roast | • |
| Intensive | • |
| Moisture plus | • |
| Slow roast | • |
| Surround | • |
| Browning | • |
| Bake | • |
| Special modes | • |
| Convection Broil | • |
| **Cooktop features** | |
| Number of gas burners | 6 |
| Number of TrueSimmer burners x power in BTU | 1 x 12 500 BTU/hod. |
| Number of power burners x power in BTU | 2 x 13.60 |
| Number of high burners x power in BTU | 3 x 19.50 |
| True Simmer function | • |
| GasStop | • |
| **User convenience** | |
| Networking with Miele@home | • |
| MotionReact proximity sensor | • |
| Precision knobs | • |
| Illuminated knob | • |
| SoftClose oven door/ SoftOpen | • |
| ComfortSwivel handle | • |
| Motorized lift-up control panel | • |

HR 1934-3 G DF
36" Range
Dual Fuel model with M Touch controls



EAN: 4002516486770 / Material number: 11791570 /
Old Material Number: 25193481USA

| | |
|---|---|
| Time synchronization | • |
| Automatic switch-off | • |
| MultiLingua | • |
| Acoustic signal when desired temperature is reached | • |
| MyMiele | • |
| Timed bursts of steam | • |
| Time of day display | • |
| Date display | • |
| Minute minder | • |
| Programmable cooking time | • |
| Sabbath and Yom Tov programs | • |
| Actual temperature display | • |
| Default temperature | • |
| Favorites | • |
| Individual settings | • |
| **Oven compartment** | |
| Oven cavity volume in cu. ft. (l) | 5.76 (163) ft³ (l) |
| Number of oven shelf levels | 6 |
| No. of halogen lamps | double |
| TwinPower hot air fans | • |
| **Efficiency** | |
| Automatic residual heat utilization | • |
| Energy-saving lighting circuit | • |
| Rapid PreHeat | • |
| **Cleaning convenience** | |
| Stainless-steel front with partial Clean Touch Steel finish | • |
| Oven with self-cleaning program | • |
| Catalyzer | • |
| ComfortClean dishwasher-safe grates | • |
| Cooktop surface | Black enamel |
| CleanGlass door | • |
| **Safety** | |
| Appliance cooling system and cool touch front | • |
| Safety cut-out | • |
| System lock | • |
| Door contact switch | • |
| Door lock during self cleaning | • |
| **Technical data** | |
| Appliance height min in in.(mm) | 37 1/8 (942) |
| Dimensions (depth) in in. (mm) with bullnose | 27 3/4 (702) |
| Appliance height max in in.(mm) | 38 5/8 (980) |
| Frequency in Hz | 60 |
| Mains plug | NEMA plug: 14–30 |
| Fresh water connection for Moisture Plus | • |
| Plumbed water connection for Moisture Plus | 1.5 |
| Appliance width in in. (mm) | 36 1/8 (915) |
| Power Rating in V | 120 |
| Voltage in V | 240/208 |

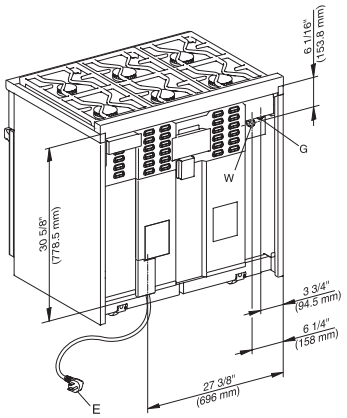
HR 1934-3 G DF
36" Range
Dual Fuel model with M Touch controls



EAN: 4002516486770 / Material number: 11791570 /
Old Material Number: 25193481USA

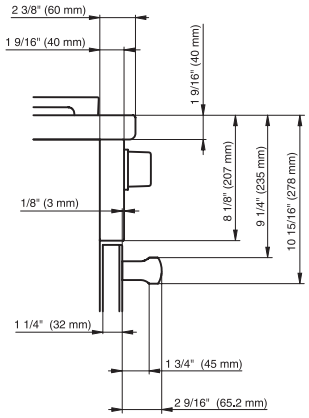
| | |
|---|---|
| Fuse rating in A | 30 |
| Number of phases | 1 |
| **Standard accessories** | |
| Anti-splash insert | 1 |
| Self Clean ready baking and roasting rack | 2 |
| Self clean ready baking and roasting racks with rail system | 1 |
| Side racks self clean ready | 1 |
| PerfectClean perforated baking tray | 1 |

# HR 1934-3 G DF
## 36" Range
## Dual Fuel model with M Touch controls



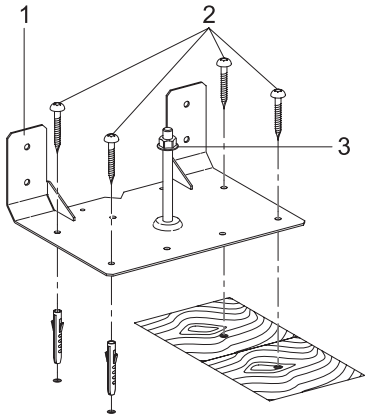

HR1934G, HR1934-2, HR1934-3 (installation drawing)

E = Electric Connection, W = Water connection, G = Gas connection



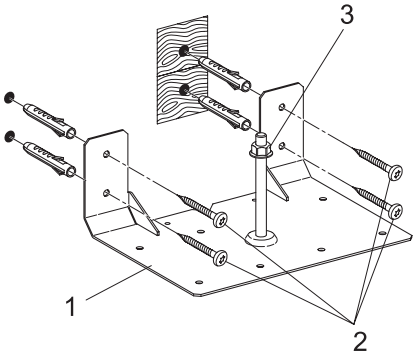

HR19x4, HR193x, HR195x (installation drawing)

(x) = Toe-kick height adjustment 5" – 6 1/2" (127 mm – 165.1 mm)



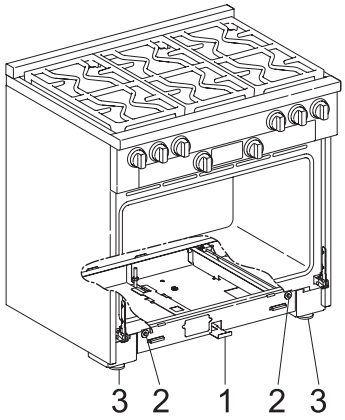

HR11xx, HR19xx, HR 17xx – Installation drawing

1 Anti-tip device , 2 Screws, 3 Locking nut



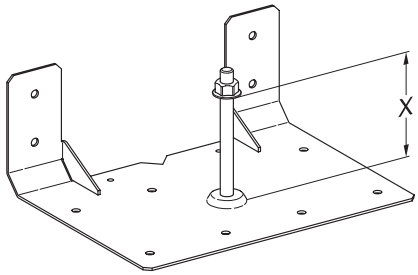

HR11xx, HR19xx – Installation drawing

1 Anti-tip device , 2 Screws, 3 Locking nut




HR11xx, HR19xx, HR17xx – Installation drawing

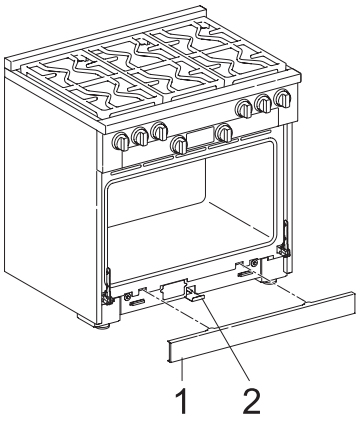
1 Anti-tip device , 2 Screws, 3 Locking nut




HR11xx, HR19xx, HR17xx – Installation drawing

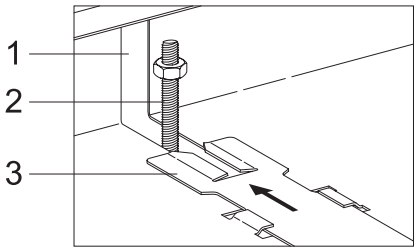
X 3 13/16" (97 mm): HR1124, HR1134, HR1135, HR1136, HR1724, HR1924, HR1934, HR1935, HR1936, HR1954, HR1955, HR1956, , X 3 1/4" (82 mm): HR1134-2, HR1134-3, HR1135-2, HR1135-3, HR1136-2, HR1136-3, HR1924-2, HR1924-3, HR1934-2, HR1934-3, HR1935-2, HR1935-3, HR1936-2, HR1936-3, HR1954-2, HR1954-3, HR1955-2, HR1955-3, HR1956-2, HR1956-3

# HR 1934-3 G DF
## 36" Range
## Dual Fuel model with M Touch controls





HR11xx, HR19xx, HR17xx – Installation drawing

1 Toe kick cover , 2 Locking clamp



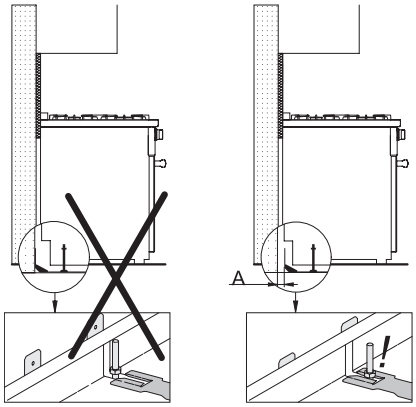

HR11xx, HR19xx, HR17xx – Installation drawing

1 Opening in the range housing , 2 Bolt of the anti-tip device , 3 Locking clamp with slot



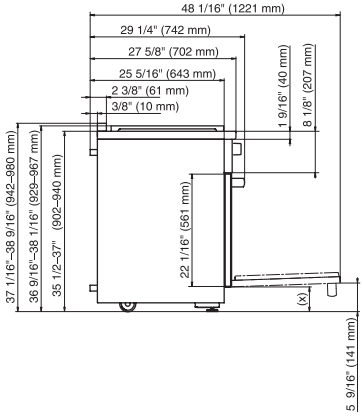
HR19xx – Installation drawing

? Maximum depth of top cabinet , ? Minimum distance to bottom edge of top cabinet , ? Distance from the floor to cooktop surface, ? Minimum distance to combustible surfaces , , E = Electric connection, W = Water connection, G = Gas connection , , (A) Width of cabinet opening, (B) Minimum distance between the top of the cooking area and the bottom of an unprotected combustible surface. Minimum distance to a protected combustible surface or when a Miele Ventilation Hood is installed. For all other Hoods please consult the manufacturer's specifications for required distances., (C) Maximum connection width right and left , (D) Maximum connection height , (E) Maximum connection depth



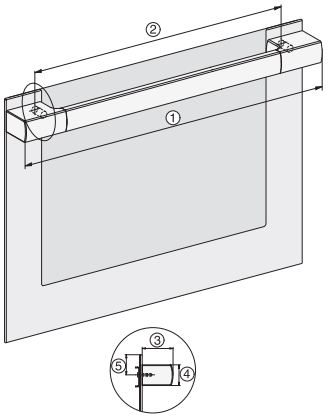

HR11xx, HR19xx, HR17xx – Installation drawing

A = Distance between the rear of the range to the supporting wall




HR1924-3, HR1934-3, HR1935-3, HR1936-3, (*Fußnote) Side view, installation drawing

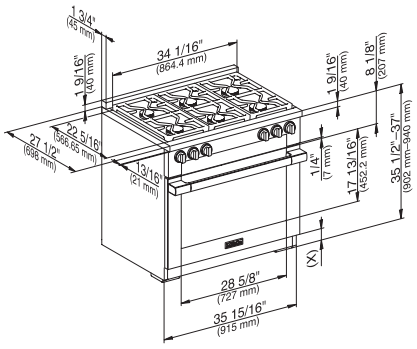
(x) = Toe-kick height adjustment 5" – 6 1/2" (127 mm – 165.1 mm)




HR11xx-3, HR14xx-3, HR16xx-3i, HR17xx-3, HR19xx-3 installation drawings

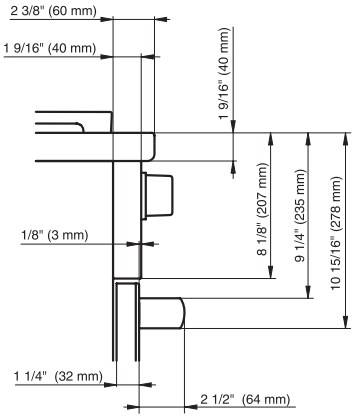
30", ? 20 ¾" / 527,6 mm, ? 16 5/8" / 422,6 mm, ? 2 ½" / 64 mm, ? 1 11/16" / 43 mm, ? 1 11/16" / 42,5 mm, , 36", ? 28 9/16" / 725 mm, ? 22 5/8" / 575 mm, ? 2 ½" / 64 mm, ? 1 11/16" / 43 mm, ? 1 11/16" / 42,5 mm

# HR 1934-3 G DF
## 36" Range
## Dual Fuel model with M Touch controls




HR1934-3 (installation drawing)

(x) = Toe-kick height adjustment 5" – 6 1/2" (127 mm – 165.1 mm)




HR1924-3, HR1934-3, HR1935-3, HR1936-3, HR1954-3, HR1955-3, HR1956-3 (installation drawing)