PFD 102 i

24” Semi-Integrated Dishwasher



Features:


- Dishwashers for private homes, offices, and commercial common areas
- Ideal for up to 5 wash cycles per day
- Tested for 12,500 program cycles
- ExtraComfort basket
- 24 min. cycle (120/208-240V)
  52 min. cycle (120V)
- BrilliantLight interior lighting
- Integrated water softener
- AutoOpen
- WiFiConn@ct as standard

MATERIAL #	ELECTRICAL REQUIREMENTS
11605430	110V / 120V, 60Hz, 15A
11605500	120/208-240V, 60Hz, 2x30A*


*Not convertible, to be sold as 208-240V only.

SPECIFICATIONS	
Overall Unit Dimensions	23.5” (598 mm) W 31.7” - 34.2” (805-870 mm) H 22.4” (570 mm) D [Depth does not include door panel]
Niche	
Minimum Cabinet Niche Opening	23.6” (600 mm) W 31.7” (805 mm) H 22.4” (570 mm) D
Plumbing	
Water Supply Requirements	• Cold or Hot (max 140°F/60°C) water connection • Male 3/4” GHT • Water pressure range 0.73 psi (0.05 bar) to 145 psi (10 bar)
Water Connection Line (Supplied)	Length: 4.9 ft (1.5 m) Female 3/4” GHT
Drain Hose (Supplied)	Length: 4.9 ft (1.5 m) 7/8” (22 mm) internal diameter
Electrical	
Power Cord (Convertible to hardwire)	NEMA 5-15 plug, 5’ 7” (1.7 m)
Sound	
Sound level	46 dB(A)
Shipping	
Shipping Weight	121 lbs (55 kg)
Shipping Dimensions	26.4” (670 mm) W 38.2” (970 mm) H 26.4” (670 mm) D


PRODUCT DIMENSIONS

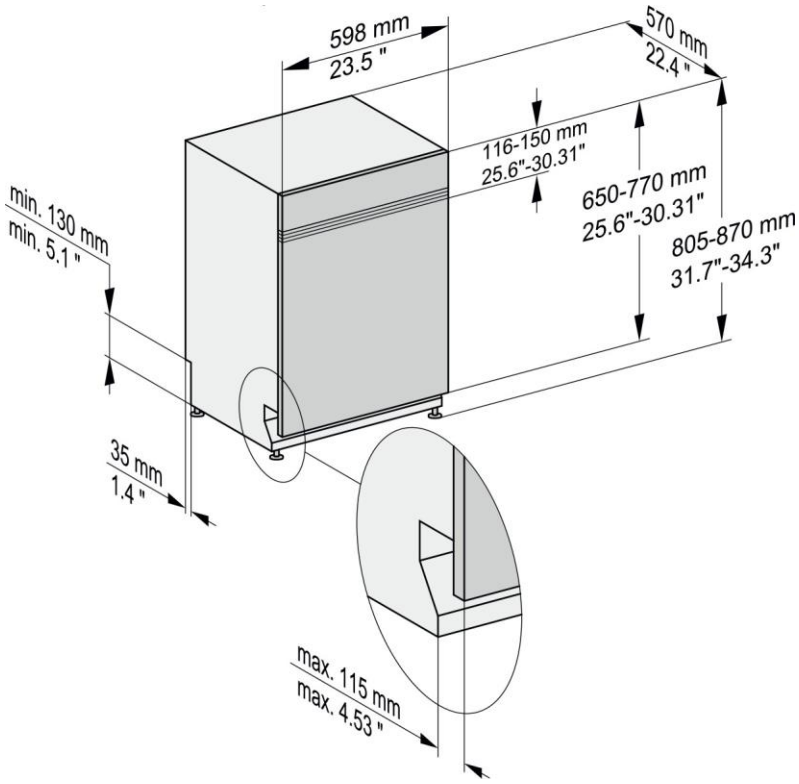

CUTOUT DIMENSIONS

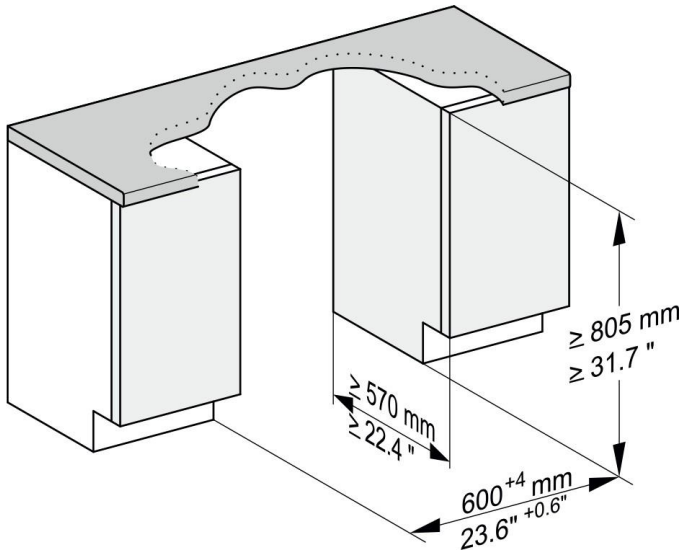

CUSTOM PANEL

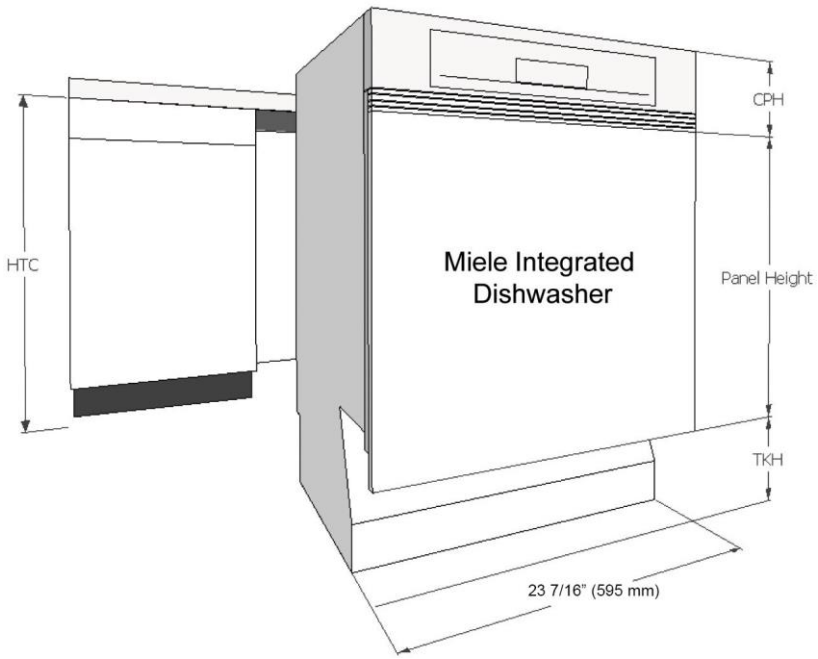

Panel Height = HTC - CPH - TKH

HTC = Height to underside of countertop
CPH = Control panel height
TKH = Toe kick height

Note: Control panel height is determined by the height of the adjoining drawers in the cabinets. The height is adjustable between 4 5/8” and 5 7/8” (116 - 150 mm) with the spacer strips provided.

Front Panel Dimensions

Length:	19.7” (500 mm) - 25.7” (654 mm)
Thickness:	0.63” (16 mm) - 0.79” (20 mm)
Width:	23.4” (595 mm) in all cases
Weight:	8.8 lbs (4 kg) - 24.3 lbs (11 kg)