PFD 104 SCVi (120V)

24” Fully Integrated Dishwasher K2o





Features:


- Integrated Dishwasher for private homes, offices and commercial common areas
- Ideal for up to 5 wash cycles per day
- Tested for 12,500 program cycles
- MaxiComfort Baskets with 3D MultiFlex Drawer
- 24 min. cycle (120/208-240V)
  52 min. cycle (120V)
- BrilliantLight interior lighting
- Integrated water softener
- Perfect integration into handleless kitchens
- Knock2open
- AutoOpen and AutoClose
- WiFiConn@ct as standard

MATERIAL #	ELECTRICAL REQUIREMENTS
11605450	110V / 120V, 60Hz, 15A
11605520	120/208-240V, 60Hz, 2x30A*


*Not convertible, to be sold as 208-240V only.

SPECIFICATIONS	
Overall Unit Dimensions	23.5” (598 mm) W 33.3” - 35.8” (845 -910 mm) H 22.4” (570 mm) D [Depth does not include door panel]
Niche	
Minimum Cabinet Niche Opening	$23^{5}/_{8}$” (600 mm) W $33^{3}/_{4}$” (845 mm) H $22^{7}/_{16}$” (570 mm) D
Plumbing	
Water Supply Requirements	• Cold or Hot (max 140°F/60°C) water connection • Male 3/4” GHT • Water pressure range 0.73 psi (0.05 bar) to 145 psi (10 bar)
Water Connection Line (Supplied)	Length: 4.9 ft (1.5 m) Female 3/4” GHT
Drain Hose (Supplied)	Length: 4.9 ft (1.5 m) 7/8” (22 mm) internal diameter
Electrical	
Power Cord (Convertible to hardwire)	NEMA 5-15 plug, 5’ 7” (1.7 m)
Sound	
Sound level	45 dB(A)
Shipping	
Shipping Weight	112 lbs (51 kg)
Shipping Dimensions	26.4” (670 mm) W 38.2” (970 mm) H 26.4” (670 mm) D


PRODUCT DIMENSIONS

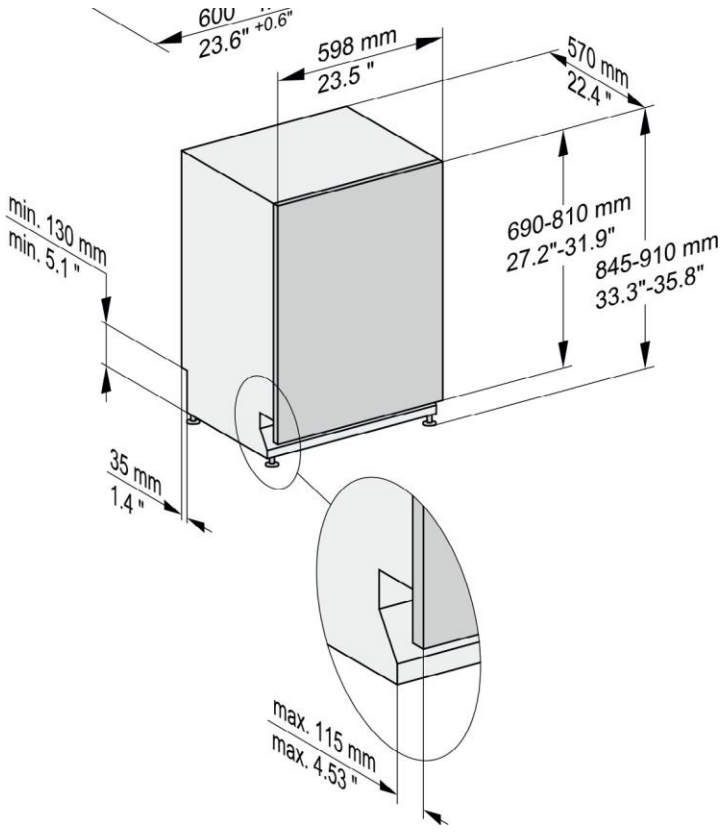

CUTOUT DIMENSIONS

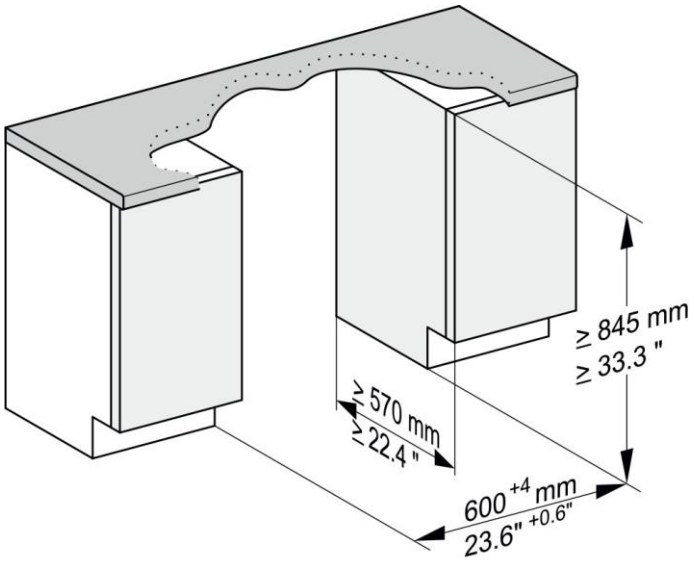

CUSTOM PANEL

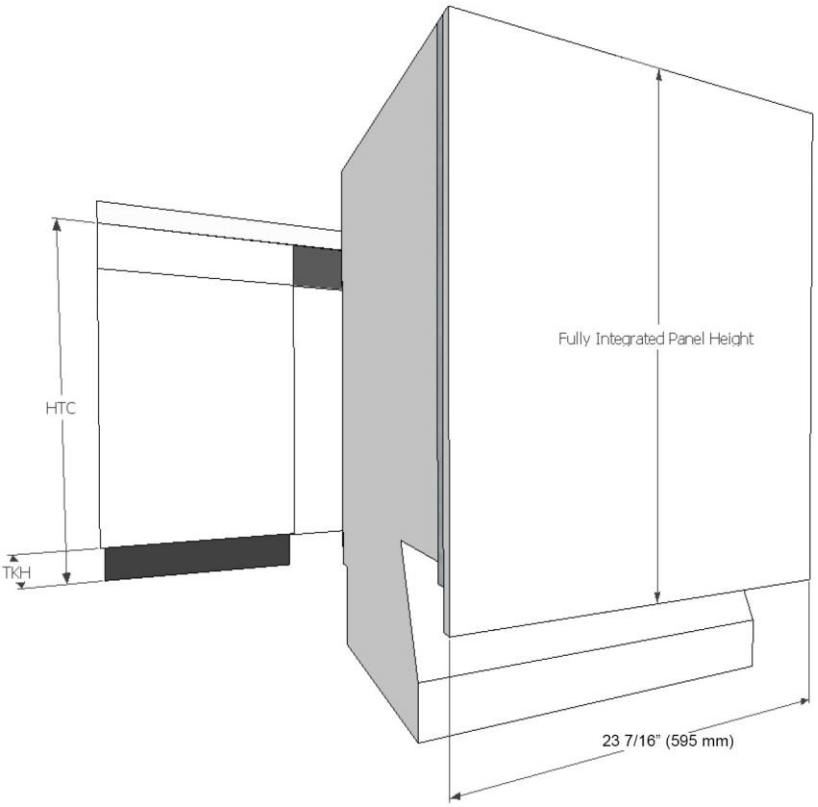

Panel Height = HTC - TKH

HTC = Height to the underside of Countertop
TKH = Toe Kick Height

Note: Control panel is along the top edge of the unit.

Front Panel Dimensions

Length:	27.2” (690 mm) - 31.9” (810 mm)
Thickness:	0.63” (16 mm) - 0.79” (20 mm)
Width:	23.4” (595 mm) in all cases
Weight:	11 lbs (5 kg) - 26.5 lbs (12 kg)