XOI4515SC

INSERT

HOW BEAUTIFUL KITCHENS BREATHE





XOI4515SC

- 3 Speeds With Power Boost
- Code Compliance Control - 395/600 CFM
- High Efficiency 3000K LED Lights
- 5 Minute delay function

DESIGNED AND CRAFTED IN ITALY

The XOI insert is an integrated blower which allows you to match your custom hood to your kitchen. This simple and affordable design is easy to install. Designed and crafted in Italy.

At XO, we believe that a good design is something everyone can afford


WORLD CLASS SERVICE | COMPREHENSIVE WARRANTIES


OUR LASTING COMMITMENT TO YOU


LOVE IT OR LEAVE IT
100% GUARANTEED

XOI4515SC

INSERT

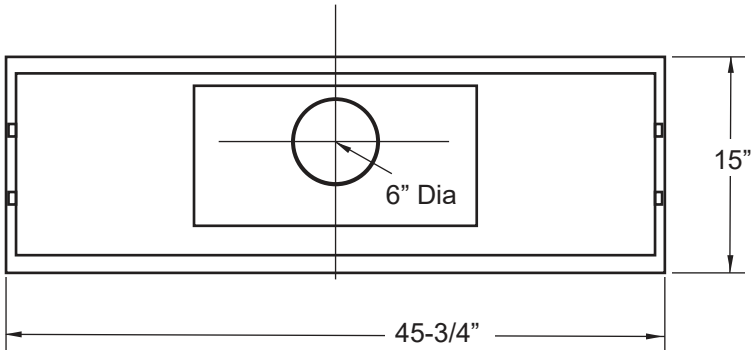

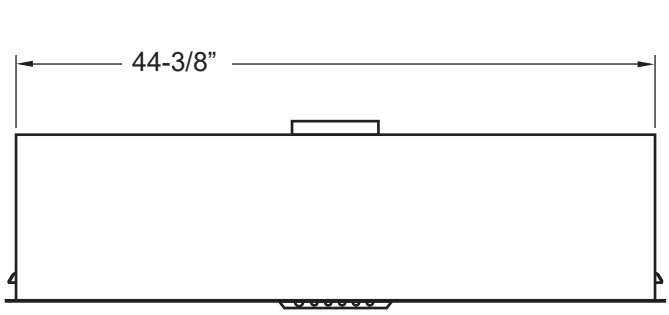



FEATURES

FINISH

Stainless Steel

FEATURES

- Electronic 3 Speed Control + Power Boost
- CCC Code Compliance Control - 395 or 600 CFM
- High Efficiency 3000K LED Lights (x2)
- High Velocity Blower optimally removes Smoke,
- Grease and Odors
- 6” Vertical Duct or Recirculating - Kit Sold Separately (Recirculated air must be returned to the living space)
- Dishwasher Safe SS Pro Baffle Filters
- 5 Minute Delay Shutoff Timer
- Made In Italy

PERFORMANCE

SPEED	1	2	3	BOOST
CFM	150	250	395	600
SONES	1.0	2.4	4.0	6.4

SPECIFICATIONS

ELECTRICAL 115VAC 60HZ 4.0 Amp

DIMENSIONS

H	11-1/2”
W	45-3/4“
D	15”

MOUNTING HEIGHT

Above Cooking Surface 27” - 32”

CUTOUT DIMENSIONS

XOI4515SC 44-1/2” x 12-3/4”

OPTIONS

Recirculation Kit	**XORFK12**
Recirculation Carbon Filter	**XORFRND**
6” Make-Up Air Kit	**XOMA06**

XO the next level in luxury appliances

xoappliance.com | 800.966.8300

UL LISTED

XO is exclusively distributed by
EASTERN MARKETING CORP.
24 Eisenhower Parkway
Roseland, NJ 07068

RECOMMENDED MOUNTING HEIGHT

All range hoods have a recommended range of installation height over the cooking surface. However cooking styles, types of cooking equipment and installation limitation can vary greatly. For installations outside the recommended range - consult XO.



THESE MODELS HAVE A 6" DIAMETER VERTICAL EXHAUST DUCT

MAKE-UP AIR

Many states have adopted regulations regarding the re-introduction of make-up air for homes with ventilation systems which can exhaust more than a specified volume of air, typically 400 CFM.

Your cooking equipment and use determine how much ventilation you need. If your local building codes require a make-up air solution based on that need, XO has the answer.

XOMA MAKE-UP AIR KITS

Make-Up Air Kits consist of two parts.



1. A sensor collar which is mounted in the exhaust duct of the hood. This contains a feather switch that is activated when air flow is detected in the duct.

2. A motorized air inlet damper which is usually mounted to the home's HVAC system. When it receives a signal from the sensor collar, the damper automatically opens to admit fresh air which is distributed via the HVAC system.

When the blower shuts off, the feather switch returns to the off position and the motorized damper is deactivated. The air inlet damper is automatically closed by a return spring.