DAS 2620
Built-in ventilation hood
with EasySwitch controls for convenient operation



- Classic design – stainless-steel panel, 24 in (60 cm) wide
- LED strip for uniform lighting
- Efficient filtration- 10-ply stainless steel grease filters
- Safe and easy to clean – Miele CleanCover
- Recirculation mode – Active AirClean or Longlife AirClean filter

EAN: 4002516495505 / Material number: 11878490 /
Old Material Number: 28S2620SUSA

General information	
Model number	DAS 2620
Manufacturer material number	11878490
EAN number	4002516495505
Marketing class	Silver
Design	
Built-in ventilation hood	•
Construction type and design	
Color	Stainless steel
Operating modes	
Recirculated mode	Can be retrofitted
Recirculation conversion kit (order separately)	DUU 151,DUU 150
OdorFree charcoal filter (order separately)	DKFS 31-R, DKFS 31-900 P
User convenience	
Electronic controls	•
Booster levels	1
CleanCover	•
Filter system	
Number of dishwasher-safe stainless steel grease filters (10-ply)	1
Lighting	
Number x W	1 x 3,0 W
Light intensity in Lx	330 lx
Color temperature in K	3500 Kelvin
Blower	
Dual-action blower	•
Exhaust air	
Air throughput in CFM in Booster	498
Air throughput with Booster level 1 (m^3/h) according to EN 61591	497.35 (845)
Safety	
Safety shut-off	•
Technical data	
Canopy width in in. (mm)	23 1/2 (596)
Canopy height in in. (mm)	1 3/8 (36)
Electrical plug	NEMA plug: 5–15
Net weight in lbs. (kg)	31 (14.0)
Depth of hood canopy in in. (mm)	10 3/4 (273)
Length of electrical wire in ft (m)	2 (0.8)
Standard plug fitted	•
Minimum height above electric cooktops in mm	24 (610)
Minimum safety distance above gas cooktops (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	26 (660)
Total connected load in kW	0.35
Voltage in V	120
Fuse rating in A	15
Number of phases	1
Frequency in Hz	60


DAS 2620
Built-in ventilation hood
with EasySwitch controls for convenient operation



EAN: 4002516495505 / Material number: 11878490 /
Old Material Number: 28S2620SUSA


Installation note	
Vent connection at top	•
Diameter of vent connection in in.(mm)	6 (150)
Standard accessories	
Non-return flap	•

DAS 2620
Built-in ventilation hood
with EasySwitch controls for convenient operation

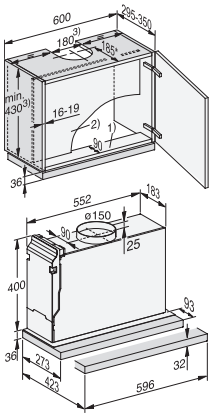

DAS2620, DAS2622 Living, DAS2620 EXTA, DAS4620, Installation drawings

1) The front section of the wall unit must be fitted with a base panel to secure the cooker hood. If the appliance is fitted further back, e.g. to accommodate a front panel, then the shelf depth should be deeper accordingly. , 2) If a partition wall is to be provided in the unit, it must be removable., 3) Extraction, recirculation with conversion kit DUU 150., , * In this installation situation, the deflector plate is flush with the front edge of the housing unit carcase. , If you wish to position the cooker hood further forward or further back (e.g. because it has a front panel), dimensions have to be adapted accordingly., , Extraction: the height of the wall unit and the cut-out dimensions must take into account any accessories fitted, e.g. silencer, recirculation hood conversion kit).

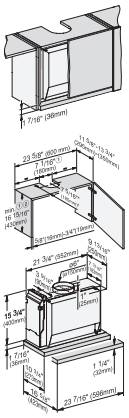

DAS2620, drawing – US

1) Exhaust air, mounted accessories must be taken into account for dimensions of cabinet height and cutouts., 2) Exhaust air, recirculation with DUU 150 conversion kit., , *In this installation situation, the screen is flush with the front edge of the cabinet. If the cooker hood is positioned further to the front or rear (e.g. when using a front panel), the dimensions must be adjusted accordingly.