DAS 4720
Built-in ventilation hood
for installation in narrow upper cabinets with EasySwitch controls



- Classic design – stainless-steel panel, 30" wide
- Unique user convenience – Con@ctivity
- LED strip for uniform lighting
- Efficient filtration- 10-ply stainless steel grease filters
- Recirculation mode – Active AirClean or Longlife AirClean filter

EAN: 4002516495925 / Material number: 11878520 /
Old Material Number: 28S4720SUSA

General information	
Model number	DAS 4720
Manufacturer material number	11878520
EAN number	4002516495925
Marketing class	Gold
Design	
Built-in ventilation hood	•
Construction type and design	
Color	Stainless steel
Operating modes	
Recirculated mode	Can be retrofitted
Recirculation conversion kit (order separately)	DUU 151,DUU 150
OdorFree charcoal filter (order separately)	DKFS 31-R, DKFS 31-900 P
User convenience	
Miele@home	•
Automatic function	Con@ctivity 3.0
Electronic controls	•
Con@ctivity	Yes
EasySwitch	•
Booster levels	1
Delayed shutdown for 5 or 15 minutes	•
Grease filter saturation indicator	•
Active charcoal filter saturation indicator	•
CleanCover	•
Smart Extras	
RemoteUpdate	•
Push notifications	•
Smart Home Integration	•
Smart Extras	
Alexa voice control	•
Google voice control	•
Filter system	
Number of dishwasher-safe stainless steel grease filters (10-ply)	1
Lighting	
Number x W	1 x 3 W
Light intensity in Lx	330 lx
Color temperature in K	3500 Kelvin
Light dimmer function	•
Blower	
Dual-action blower	•
Exhaust air	
Air throughput in CFM in Booster	498
Air throughput with Booster level 1 (m^3/h) according to EN 61591	497.35 (845)
Safety	
Safety shut-off	•

DAS 4720
Built-in ventilation hood
for installation in narrow upper cabinets with EasySwitch controls




EAN: 4002516495925 / Material number: 11878520 /
Old Material Number: 28S4720SUSA

Technical data	
Canopy width in in. (mm)	29 7/8 (758)
Canopy height in in. (mm)	1 3/8 (36)
Electrical plug	NEMA plug: 5–15
Net weight in lbs. (kg)	36 (16.0)
Depth of hood canopy in in. (mm)	10 3/4 (273)
Length of electrical wire in ft (m)	2 (0.8)
Standard plug fitted	•
Minimum height above electric cooktops in mm	24 (610)
Minimum safety distance above gas cooktops (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	26 (660)
Total connected load in kW	0.35
Voltage in V	120
Fuse rating in A	15
Number of phases	1
Frequency in Hz	60
Installation note	
Vent connection at top	•
Standard accessories	
Non-return flap	•

DAS 4720

Built-in ventilation hood

for installation in narrow upper cabinets with EasySwitch controls

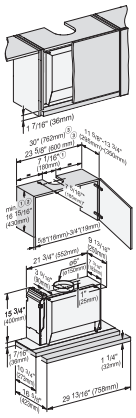

DAS4720 US, Installation drawings, VG USA

? Extraction mode: the height of the wall unit and the cut-out dimensions must take into account any accessories fitted., ? Recirculation with recirculation conversion kit., ? Installation is also possible in a 600 mm wide unit., , * In this installation situation, the deflector plate is flush with the front edge of the housing unit carcase. If you wish to position the cooker hood further forward or further back (e.g. because it has a front panel), dimensions have to be adapted accordingly.