DAS 4930
Built-in ventilation hood with intuitive SmartControl controls



- Elegant design – Obsidian Black control panel, 90 cm wide
- Unique user convenience – Con@ctivity
- LED strip for uniform lighting
- Efficient filtration- 10-ply stainless steel grease filters
- Recirculation mode – Active AirClean or Longlife AirClean filter

EAN: 4002516496199 / Material number: 11878550 /
Old Material Number: 28S4930BUSA

General information	
Model number	DAS 4930
Manufacturer material number	11878550
EAN number	4002516496199
Marketing class	Gold
Design	
Built-in ventilation hood	•
Construction type and design	
Color	Obsidian Black
Operating modes	
Recirculated mode	Can be retrofitted
Recirculation conversion kit (order separately)	DUU 151,DUU 150
OdorFree charcoal filter (order separately)	DKFS 31-R, DKFS 31-900 P
User convenience	
Miele@home	•
Automatic function	Con@ctivity 3.0
Electronic controls	•
Con@ctivity	Yes
Power levels (number excl. Intensive)	3
SmartControl	•
Booster levels	2
Delayed shutdown for 5 or 15 minutes	•
Grease filter saturation indicator	•
Active charcoal filter saturation indicator	•
CleanCover	•
Smart Extras	
RemoteUpdate	•
Push notifications	•
Smart Home Integration	•
Smart Extras	
Alexa voice control	•
Google voice control	•
Filter system	
Number of dishwasher-safe stainless steel grease filters (10-ply)	1
Lighting	
Number x W	1 x 3 W
Light intensity in Lx	300 lx
Color temperature in K	3500 Kelvin
Light dimmer function	•
Blower	
Dual-action blower	•
Exhaust air	
Air throughput in CFM in Booster	498
Air throughput with Booster level 1 (m^3/h) according to EN 61591	497.35 (845)


DAS 4930
Built-in ventilation hood
with intuitive SmartControl controls



EAN: 4002516496199 / Material number: 11878550 /
Old Material Number: 28S4930BUSA


Safety	
Safety shut-off	•
Single-ply safety glass (ESG)	•
Technical data	
Canopy width in in. (mm)	35 1/4 (896)
Canopy height in in. (mm)	1 3/8 (36)
Electrical plug	NEMA plug: 5–15
Net weight in lbs. (kg)	36 (16.0)
Depth of hood canopy in in. (mm)	10 3/4 (273)
Length of electrical wire in ft (m)	2 (0.8)
Standard plug fitted	•
Minimum height above electric cooktops in mm	24 (610)
Minimum safety distance above gas cooktops (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	26 (660)
Total connected load in kW	0.35
Voltage in V	120
Fuse rating in A	15
Number of phases	1
Frequency in Hz	60
Installation note	
Vent connection at top	•
Standard accessories	
Non-return flap	•

DAS 4930
Built-in ventilation hood
with intuitive SmartControl controls

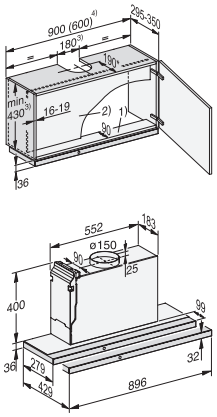

DAS4930, DAS4931, Installation drawings

1) The front section of the wall unit must be fitted with a base panel to secure the cooker hood. If the appliance is fitted further back, e.g. to accommodate a front panel, then the shelf depth should be deeper accordingly. , 2) If a partition wall is to be provided in the unit, it must be removable., 3) Extraction, recirculation with conversion kit DUU 150., 4) Installation is also possible in a 600 mm wide unit., * In this installation situation, the deflector plate is flush with the front edge of the housing unit carcase. , If you wish to position the cooker hood further forward or further back, dimensions have to be adapted accordingly., , Extraction: the height of the wall unit and the cut-out dimensions must take into account any accessories fitted, e.g. silencer, recirculation hood conversion kit).

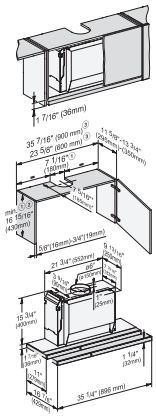

DAS4930, DAS4931, drawing – US

1) Exhaust air, mounted accessories must be taken into account for dimensions of cabinet height and cutouts., 2) Exhaust air, recirculation with DUU 150 conversion kit., 3) Installation is also possible in a 600 mm wide cabinet., , *In this installation situation, the screen is flush with the front edge of the cabinet. If the cooker hood is positioned further to the front or rear, the dimensions must be adjusted accordingly.