DAS 8930
Built-in ventilation hood
with intuitive SmartControl White controls for use in narrow upper cabinets



- Intricate design – flat stainless-steel panel, 36 in (90 cm)wide
- Unique user convenience – Con@ctivity
- LED strip for uniform lighting
- Efficient filtration- 10-ply stainless steel grease filters
- Recirculation mode – Active AirClean or Longlife AirClean filter

EAN: 4002516495628 / Material number: 11878590 /
Old Material Number: 28S8930SUSA

General information	
Model number	DAS 8930
Manufacturer material number	11878590
EAN number	4002516495628
Marketing class	Platinum
Design	
Built-in ventilation hood	•
Construction type and design	
Color	Stainless steel
Operating modes	
Recirculated mode	Can be retrofitted
Recirculation conversion kit (order separately)	DUU 151
OdorFree charcoal filter (order separately)	DKF 31-P, DKF 31-R
User convenience	
Miele@home	•
Automatic function	Con@ctivity 3.0
Electronic controls	•
Con@ctivity	Yes
Power levels (number excl. Intensive)	3
SmartControl	•
Booster levels	2
Delayed shutdown for 5 or 15 minutes	•
Grease filter saturation indicator	•
Active charcoal filter saturation indicator	•
CleanCover	•
Smart Extras	
RemoteUpdate	•
Push notifications	•
Smart Home Integration	•
Smart Extras	
Alexa voice control	•
Google voice control	•
Filter system	
Number of dishwasher-safe stainless steel grease filters (10-ply)	2
Lighting	
Number x W	1 x 3 W
Light intensity in Lx	270 lx
Color temperature in K	3500 Kelvin
Light dimmer function	•
Blower	
Dual-action blower	•
Exhaust air	
Air throughput in CFM in Booster	495
Air throughput with Booster level 1 (m^3/h) according to EN 61591	494.41 (840)
Safety	
Safety shut-off	•

DAS 8930
Built-in ventilation hood
with intuitive SmartControl White controls for use in narrow upper cabinets




EAN: 4002516495628 / Material number: 11878590 /
Old Material Number: 28S8930SUSA

Technical data	
Canopy width in in. (mm)	33 7/8 (861)
Canopy height in in. (mm)	2 3/8 (60)
Electrical plug	NEMA plug: 5–15
Net weight in lbs. (kg)	42 (19.0)
Depth of hood canopy in in. (mm)	12 1/8 (307)
Length of electrical wire in ft (m)	2 (0.8)
Standard plug fitted	•
Minimum height above electric cooktops in mm	24 (610)
Minimum safety distance above gas cooktops (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	26 (660)
Total connected load in kW	0.35
Voltage in V	120
Fuse rating in A	15
Number of phases	1
Frequency in Hz	60
Installation note	
Vent connection at top	•
Vent connection at top and rear	•
Installation template	•
Standard accessories	
Non-return flap	•


DAS 8930

Built-in ventilation hood
with intuitive SmartControl White controls for use in narrow upper cabinets

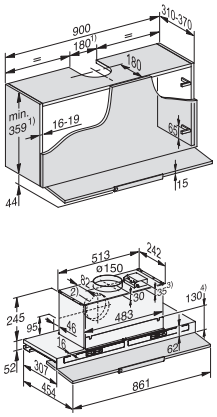

DAS8930, Installation drawings

1) Extraction, recirculation with conversion kit DUU 150., 2) Alternative ducting connection to the rear., 3) Accessory DSM module., 4) The wall unit can be fitted with a partition after installation. The slots for the grease filters and, in recirculation mode, for the odor filters must remain accessible., , The height of the wall unit and the cut-out dimensions must take into account any accessories fitted (e.g. silencer, recirculation hood conversion kit, DSM module)

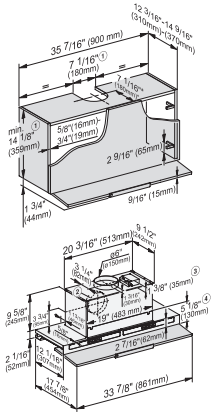

DAS8930, drawing – US

1) Exhaust air, recirculation with DUU 150 conversion kit., 2) Exhaust air connection alternatively to the rear., 3) DSM module accessory., 4) The wall unit can be fitted with a partition after installation. The slots for the grease filters and, in the case of recirculation mode, for the odor filters must remain accessible. , , Mounted accessories must be taken into account for the cabinet height and cut-out dimensions (e.g. silencer, recirculation air conversion kit, DSM module).