# KTI36XT

## 36" T-SHAPE ISLAND HOOD
## STAINLESS STEEL



Complete your Bertazzoni kitchen with this elegant island ventilation solution

Choose among 4 extraction airflow speeds, reaching a maximum flow performance of 600 CFM (cubic feet per minute).

Easily throttle down airflow to 295 or 395 CFM with the digital airflow reducer

Enjoy the ultra-quiet performance rated at 2.5 sones (lowest setting)

Easily control all hood functions with the electronic controls or the included ADA-compliant remote control.

Enjoy powerful illumination of the cooking surface with 4 long-lasting and bright LED lights, which also don't create additional heat and are energy efficient.

Filter out odors and grease with the elegant yet practical European baffle filters, which can be easily cleaned periodically in the dishwasher.

The hood comes standard for venting outside the kitchen, but can be easily modified for recirculation by installing the optional charcoal filters.

Duct cover extension available for installation in kitchens with tall ceiling.

Designed and manufactured with pride in Italy.


Industry leading 2 years parts and labor warranty.


| **PRODUCT FEATURES** | |
|---|---|
| Size | 36'' |
| Hood type | Island mount |
| Hood finish | Stainless steel |
| Motor | 1 |
| Speed | 3 + Booster |
| Hood control | Electronic with buttons |
| Remote control | Included |
| Lights | 2 LED |
| Filters type | Stainless steel mesh |
| Extraction power | 600 CFM |
| Sound Level (min) | 2.5 Sones |
| Recirculation | Yes |
| Duct cover | Included |
| Duct size | 6" diameter |
| **TECHNICAL SPECIFICATIONS** | |
| Electrical supply | 110-120 V 60 HZ - 394 W<br>WIRING BOX Amp |
| Power connection | Hardwired |
| Certification | ADA Compliant,CEC,UL |
| Packaging dimensions and weight | W 40 3/16''<br>H 19 15/16''<br>D 31 8/16''<br>89.95 lbs |
| **OPTIONAL ACCESSORIES** | |
| 901581 | Baffle filter kit for Island Hood |
| 901585 | Duct cover installation up to 10' for Island Hood |
| 901531 | Charcoal filters |
| 901532 | Durable charcoal filters |

# KTI36XT


## 36" T-SHAPE ISLAND HOOD
## STAINLESS STEEL

### PRODUCT DIMENSIONS

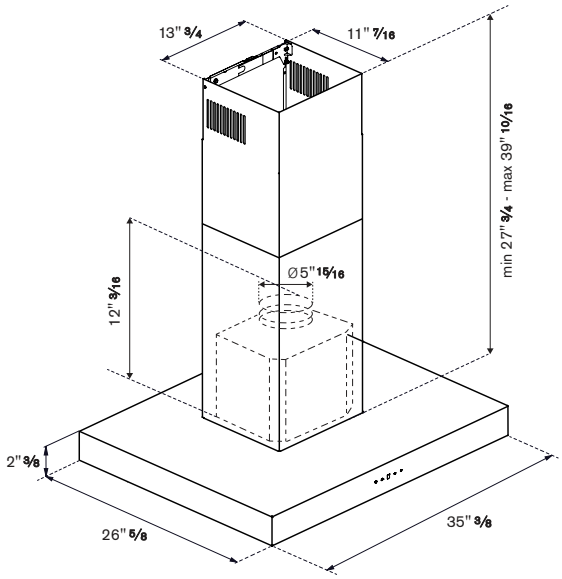

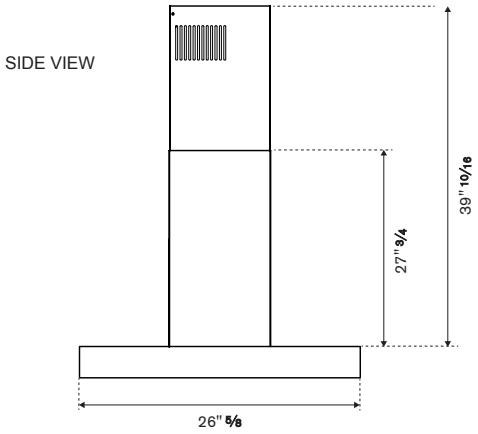
### PRODUCT INSTALLATION

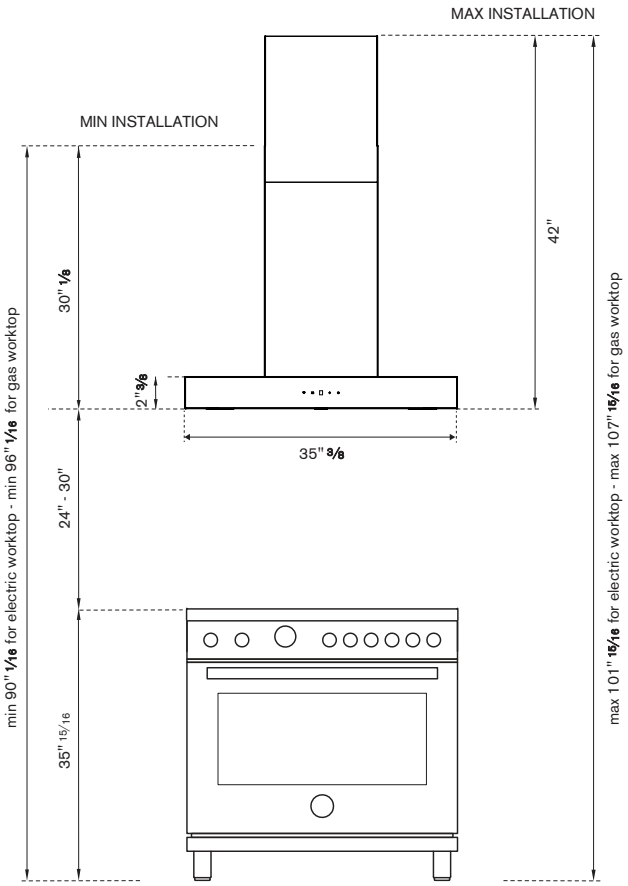



**Hood Clearance**

Recommended height above cooking surface:
min 24" for electric worktop
min 30" for gas worktop

### INSTALLATION OF WIRING CONNECTION

Remove the cover from the field wiring compartment.
DO NOT turn on the power until installation is complete!
Connect the Power Supply Cable to the rangehood.
Connect the Green (Green and Yellow) ground wire under the Green grounding screw.
Attach the White lead of the power supply to the White lead of the rangehood with a twist-on type wire connector.
Attach the Black lead of the power supply to the Black lead of the rangehood with a twist-on type wire connector.
Replace the field wiring compartment cover and the grease filters.

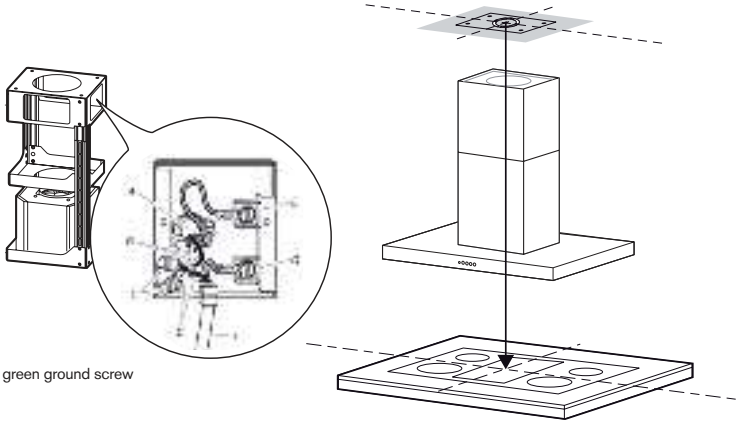

A. Home power supply cable
B. Black wires
C. UL listed wire connectors
D. White wires
E. Green (or bare) ground wire from home power supply connected to green ground screw
F. Range hood power supply cable
G. Range hood power supply cable connected to green ground screw

**Disclaimer**: while every effort has been made to ensure the accuracy of the information contained in this document, Fratelli Bertazzoni reserves the right to change it at any time without notice. For detailed installation instructions, consult the installation manual. Fratelli Bertazzoni, Bertazzoni and the winged wheel brand icon are registered trademarks of Bertazzoni Spa.