


# FISHER & PAYKEL

**DATA SHEET**
24" Integrated Dishwasher Tall

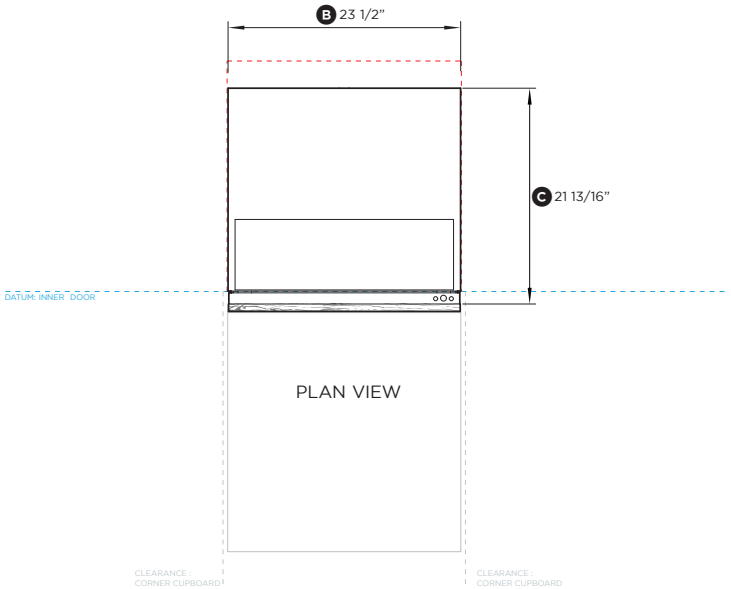


PLAN VIEW

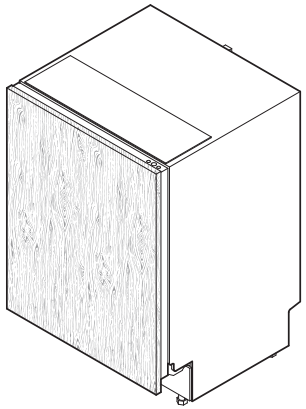

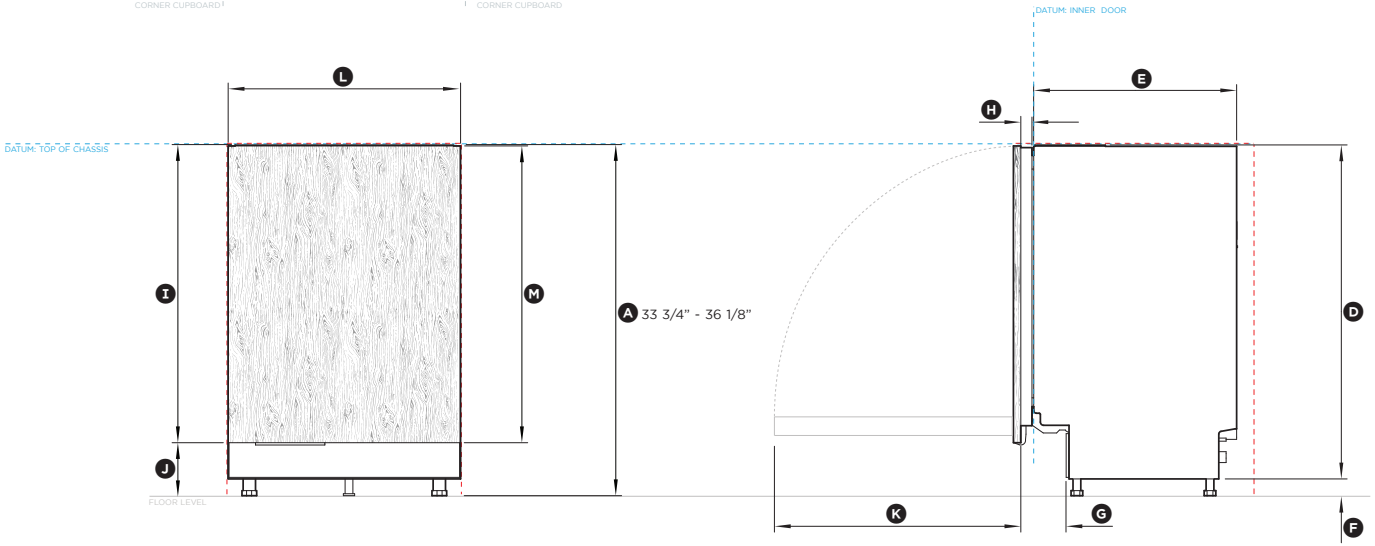


FRONT VIEW

PROFILE VIEW

Model nos:
DW24UT4I2,
DW24UT2I2

| **Product Dimensions** | **in** | **mm** |
|---|---|---|
| Ⓐ Overall height of product* | 33 3/4" - 36 1/8" | 857 - 917 |
| Ⓑ Overall width of product** | 23 1/2" | 597 |
| Ⓒ Overall depth of product (incl. inner door)** | 21 13/16" | 554 |
| Ⓓ Height of chassis | 33 3/4" | 857 |
| Ⓔ Depth of chassis (excl. inner door)** | 20 1/2" | 521 |
| Ⓕ Height of feet* | 0 - 2 3/8" | 0-60 |
| Ⓖ Depth of toe kick recess | 4 9/16" | 116 |
| Ⓗ Depth of inner door | 1 5/16" | 33 |
| Ⓘ Height from top of chassis to bottom door panel | 30 1/16" | 764 |
| Ⓙ Height from to bottom of door to floor* | 5 7/16" - 7 13/16" | 138 - 198 |
| Ⓚ Minimum depth of open door | 26 1/2" | 673 |
| Ⓛ Minimum width of custom door panel | 23 7/16" | 595 |
| Ⓜ Minimum height of custom door panel | 28 1/8" - 31 1/16" | 714 - 789 |

*Depending on adjustment of levelling feet
**Excluding side seals

| **Minimum Clearances** | **in** | **mm** |
|---|---|---|
| Minimum inside height of cavity* | 33 3/4" | 857 |
| Minimum inside width of cavity | 23 5/8" | 600 |
| Minimum overall depth of cavity | 22 13/16" | 580 |
| Minimum clearance to corner cupboard | 1/2" | 13 |
| Height of toe kick area | 2 9/16"- 7 7/8" | 65 200 |
| Minimum clearance to adjacent cupboard door | 1/16" | 2 |


*Depending on adjustment of levelling feet


INDICATES PRODUCT DATUM ----------
INDICATES CABINETRY CLEARANCES ----------

DATE: 05.07.2023 90002974A

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation guide for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

0 5 10 20
Inches

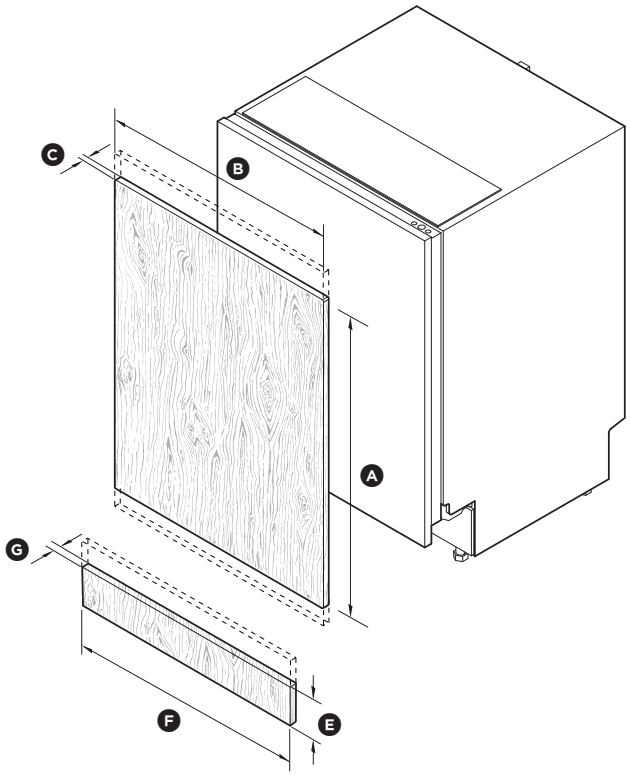

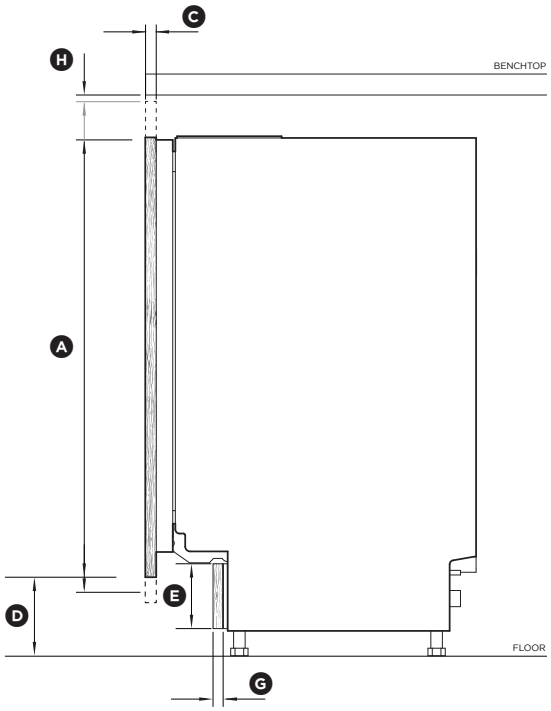



# FISHER & PAYKEL

**DATA SHEET**

24" Integrated Dishwasher Tall

Model nos:
DW24UT4I2,
DW24UT2I2

| **Product Dimensions** | **in** | **mm** |
|---|---|---|
| Ⓐ Minimum height of custom door panel for full coverage of the inner door | 28 1/8" | 714 |
| Maximum height custom door panel | 31 1/16" | 789 |
| Ⓑ Minimum width of custom door panel | 23 7/16" | 596 |
| Ⓒ Depth of custom door panel | 5/8" - 1" | 16 - 25 |
| Ⓓ Height from floor to door panel base* | 2 3/4" - 7 7/8" | 70 - 200 |
| Ⓔ Toe kick panel height* | 2 3/4" - 7 7/8" | 70 - 200 |
| Ⓕ Minimum width of custom toe kick panel | 23 7/16" | 595 |
| Ⓖ Minimum toe kick panel depth | 1/4" | 7 |
| Ⓗ Minimum clearance between top of door panel and benchtop | 1/16" | 2 |
| Weight of door panel (including handle) | 9 – 20lb | |

*Depending on adjustment of levelling feet

IMPORTANT NOTE:
For full installation and clearance details please refer to our installation manual.

| | |
|---|---|
| **Electrical requirements** | 120V, 60Hz, Maximum current 8.9A |
| **Water pressure** | 0.03-1MPa |

INDICATES PRODUCT DATUM ----------
INDICATES CABINETRY CLEARANCES ----------

DATE: 05.07.2023 90002974A

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation guide for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com