



XOE230_ COMPACT UNDER CABINET HOOD

HOW BEAUTIFUL KITCHENS BREATHE



XOE230_

- 3 Speed Illuminated Touch Control
- 5 Minute Delay Timer
- Brilliant LED Light Bar
- Dishwasher Safe Hybrid Filters



The XOE230_ is part of our Performance collection, designed with the Do-It-Yourselfer and smaller kitchen makeovers in mind. It provides customers the opportunity to employ XO quality and innovation to vent their kitchen without having to re-invent their kitchen.

Available in three finishes for ducted or ductless, recirculating installations.

At XO, we believe that a good design is something everyone can afford

WORLD CLASS SERVICE | COMPREHENSIVE WARRANTIES
OUR LASTING COMMITMENT TO YOU



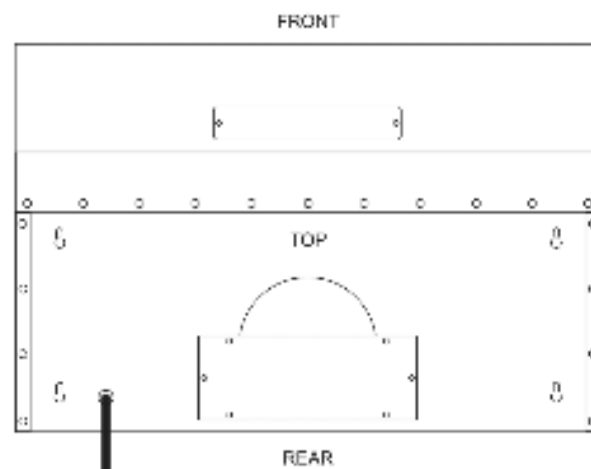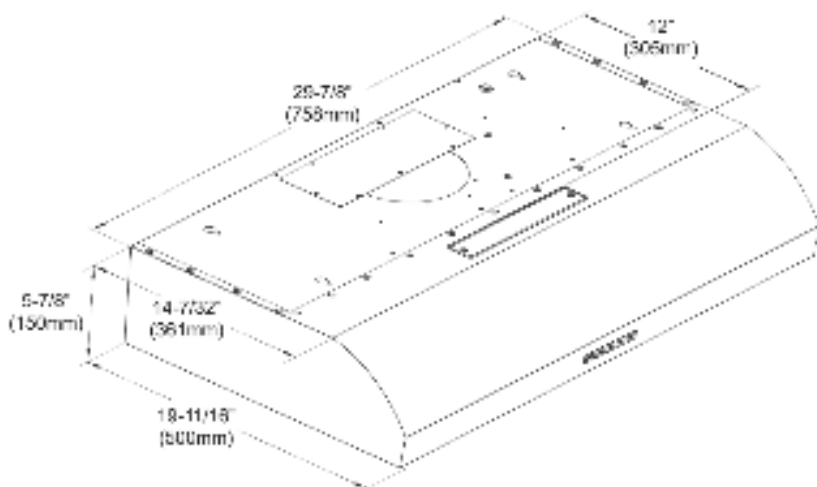

FEATURES

FINISH

Stainless Steel, Black or White

FEATURES

- Brilliant LED Light Bar
- Three speed Illuminated Touch Control
- 3-Prong Cord Set Included
- High Velocity Blower optimally removes Smoke, Grease and Odors
- 5 Minute Delay Timer
- Top or Rear Venting
- Dishwasher Safe Hybrid Filter

PERFORMANCE

SPEED	1	2	3
CFM	190	280	400
SONES	1.0	4.5	5.5

SPECIFICATIONS

ELECTRICAL 120V 60HZ 2.5 AMP

DIMENSIONS H 5 7/8"
W 29 7/8"
D 19 11/16"

MOUNTING HEIGHT

ABOVE COOKING


Gas 24" - 32"
Electric 20" - 32"

DUCTING SIZES

Top - 7" round or 3 1/4" x 10"
Rear - 3 1/4" x 10"

OPTIONS

Recirculation Kit XORFK10

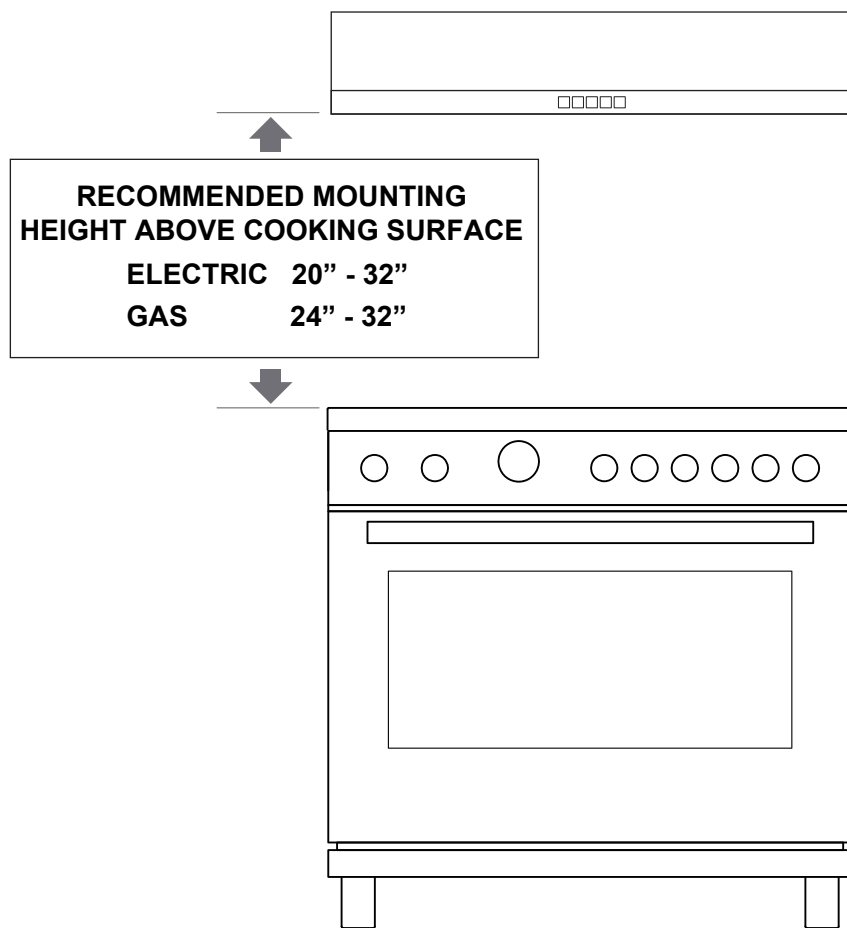

All range hoods have a recommended range of installation height over the cooking surface.

It is important to install the hood at the proper mounting height. Hoods mounted too low could result in heat damage and fire hazard; while hoods mounted too high will be hard to reach and will lose its performance and efficiency.