XOU15WGBS

15” BLACK STAINLESS STEEL UNDERCOUNTER
SINGLE ZONE WINE COOLER

15” UNDERCOUNTER SINGLE ZONE WINE COOLER





XOU15WGBS

- Racks Extend and Absorb Vibration
- Tri-Color Led Lighting
- Secure Door Lock
- Single Zone To Store and Serve

15” UNDERCOUNTER OUTDOOR WINE COOLER

Keep 34 bottles close at hand and ready to serve at 41° to 64° F.

This elegant, efficient wine storage and serving center is the perfect choice for convenient entertaining. At only 15” wide and designed to install flush with your cabinetry, this quiet and efficient wine cooler will prove to be the ideal choice for entertaining or just relaxing.

When it is all about the wine - it is all about XO.


WORLD CLASS SERVICE | COMPREHENSIVE WARRANTIES

OUR LASTING COMMITMENT TO YOU

XOU15WGBS

15” BLACK STAINLESS SINGLE ZONE WINE COOLER

*Specify R for right hand hinge - or - L for left hand hinge

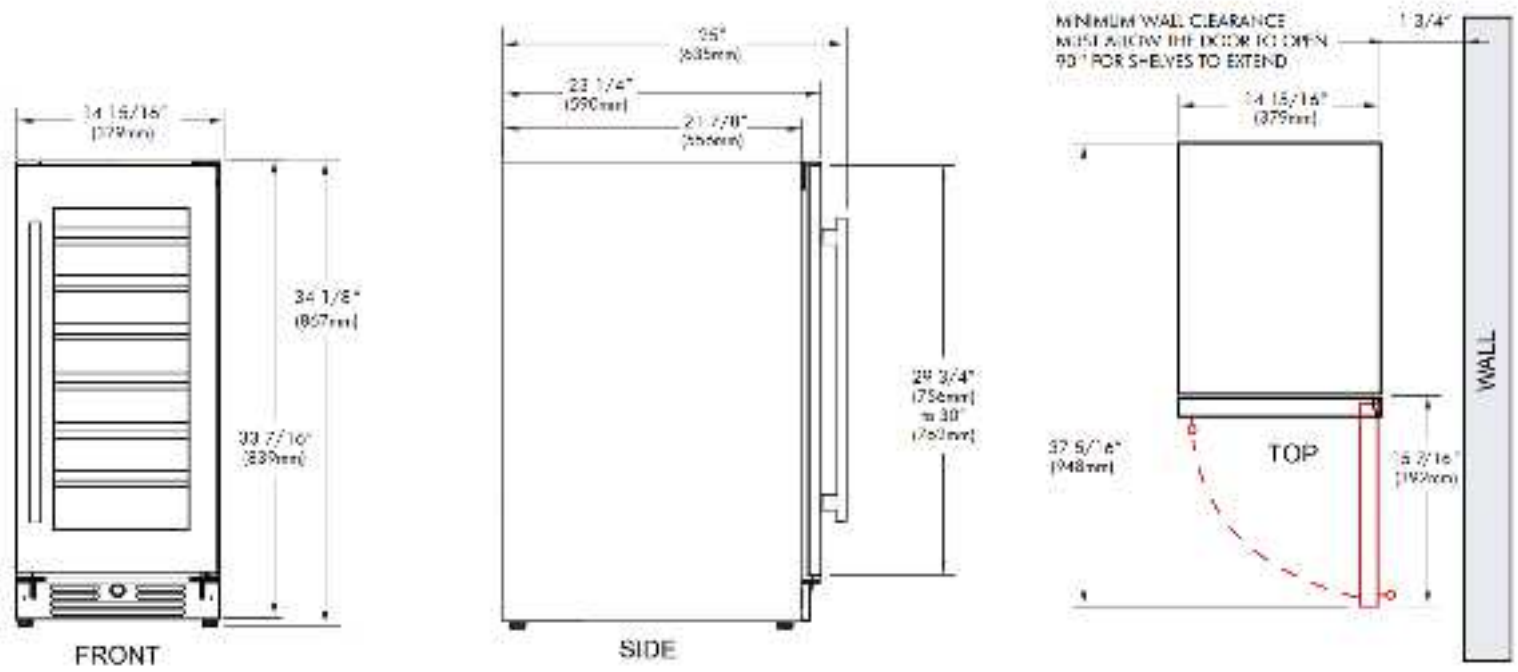

FEATURES

CAPACITY

Extending wire bottle racks hold:
(30) 750ml bottles 41° To 64° F
(4) additional bottles storage at the bottom

FEATURES

- Zero clearance hinges for flush integration
- Secure door lock
- Non-reversible door - specify right or left hinge
- Library quiet 37 dBA operation
- Elegant tri-color interior illumination
- Intuitive digital touch controls
- 6’ Power Cord with low profile 90° flat plug
- Alarm Functions
- Energy Saver and Sabbath Mode

Note: zero clearance hinges are visible just above and below the door

SPECIFICATIONS

ELECTRICAL	115V 60HZ 1.2 AMP*
DIMENSIONS	H 34 1/8” W 14 15/16” D 23 1/4”
ROUGH IN	H 34 1/4“ min W 15 3/16” D 24”
REFRIGERANT	R600A



DESIGNER Handle Included

ENERGY STAR


the next level in luxury appliances
xoappliance.com | 800.966.8300

XO is exclusively distributed by EASTERN MARKETING CORP.
24 Eisenhower Parkway Roseland, NJ 07068

XOU15WGBS

15” BLACK STAINLESS SINGLE ZONE WINE COOLER


ROUGH-IN DIMENSIONS

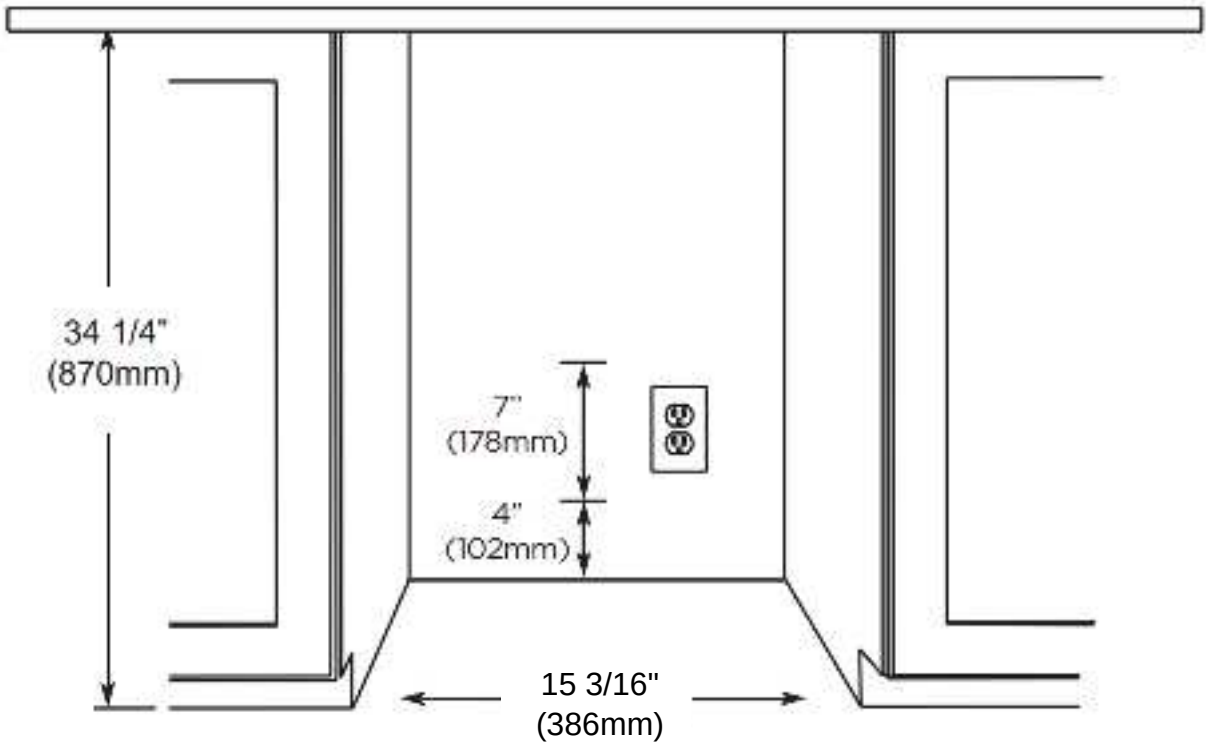


All XO undercounter units arrive pre-wired with low profile plugs for easy installation



Need more space - Cut into an adjoining cabinet to reach an outlet there



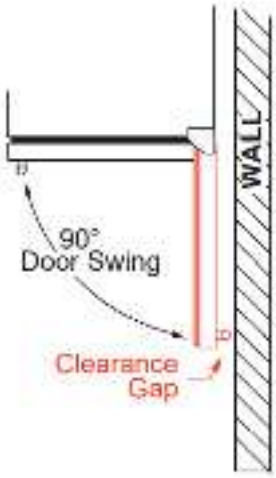

When installing with The hinge side next to a wall -Leave 1-3/4” clearance gap for cabinet handles door must be able to open a minimum of 90 .

If the door cannot open fully, you cannot extend the shelves.