XOU24BCOF

24” FULL PANEL OVERLAY BEVERAGE CENTER

LUXURY LIFESTYLE REFRIGERATION





XOU24BCOF

- Shelves Extend Fully While Loaded
- Secure Door Lock
- Tri-Color LED Interior Lighting
- Shelves Adjust To 15 Different Positions

24” FULL PANEL OVERLAY UNDERCOUNTER BEVERAGE CENTER

Store up to 145 (12oz) cans at a frosty 34° to 50° F and still find just what your are looking for. The clear glass shelves fully extend while fully loaded enabling you to see the entire contents at a glance. No more fumbling around or emptying the unit to find what you want.

And because beverages come in all shapes and sizes, the shelves of your XO beverage center can quickly adjust to 15 different levels.


WORLD CLASS SERVICE | COMPREHENSIVE WARRANTIES

OUR LASTING COMMITMENT TO YOU

XOU24BCOF

24” FULL PANEL OVERLAY UNDERCOUNTER BEVERAGE CENTER

*Specify R for right hand hinge - or - L for left hand hinge

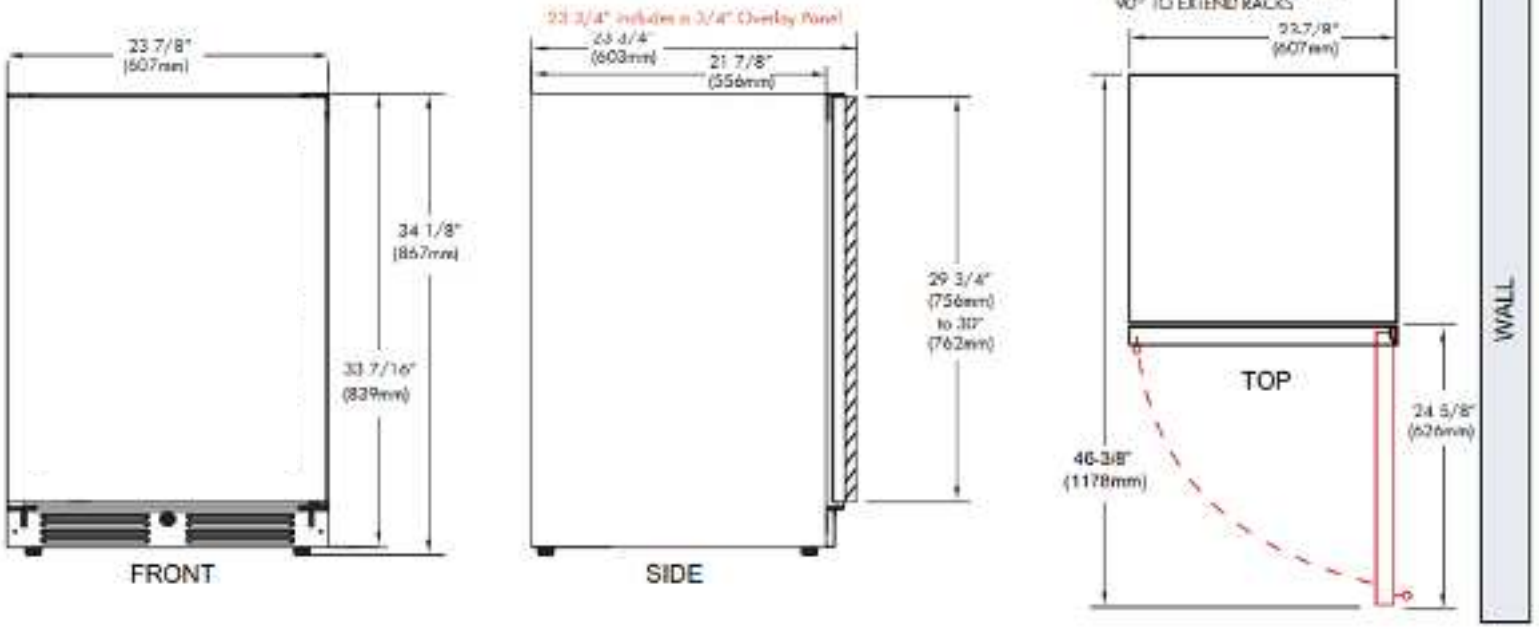

FEATURES

CAPACITY

Full extension clear glass shelves hold 145 (12oz) cans at 34° to 50° F

FEATURES

- Glass shelves extend fully while loaded to reveal contents
- Secure door lock
- Tri-color LED interior lighting
- Shelves quickly adjust to 15 different positions
- Intuitive digital temp control from 34° to 50° F
- Holds up to 145 (12oz) cans
- Flush installation design
- Energy-efficient Low-E Glass
- Removable Wine Bottle Cradle included
- X-Active circulation removes odors and circulates air
- Quiet Operation 39 dBA
- ENERGY STAR Certified Residential
- Designed for residential or commercial settings

Note: zero clearance hinges are visible just above and below the door panel.

SPECIFICATIONS

ELECTRICAL	120V 60HZ 4.35 AMP*
DIMENSIONS	H 34 1/8” W 23 7/8” D 23 3/4” (w 3/4” finish panel)
ROUGH IN	H 34 1/4“ min W 24” D 24”
REFRIGERANT	R600A
WEIGHT	149 lbs

ENERGY STAR

XO the next level in luxury appliances


xoappliance.com | 800.966.8300

XO is exclusively distributed by EASTERN MARKETING CORP.
24 Eisenhower Parkway Roseland, NJ 07068

XOU24BCOF

24” FULL PANEL OVERLAY UNDERCOUNTER BEVERAGE CENTER


ROUGH IN DIMENSIONS

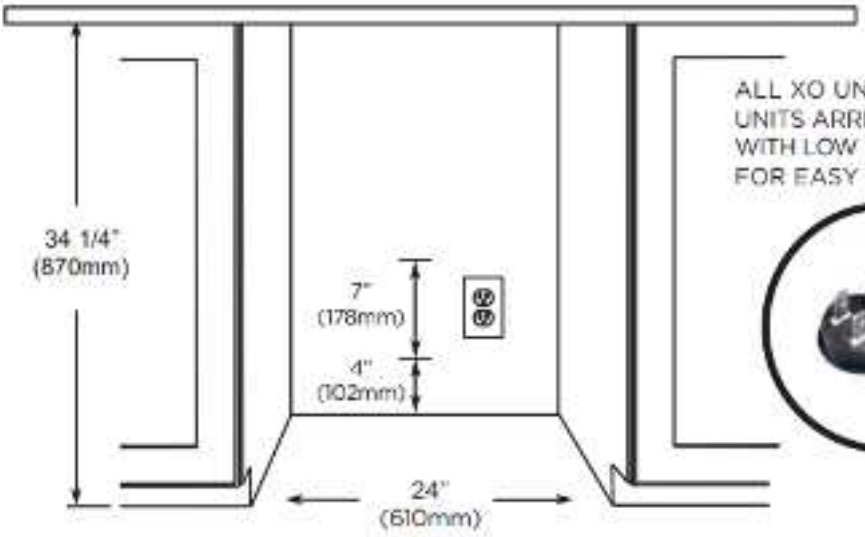


ALL XO UNDERCOUNTER UNITS ARRIVE PRE-WIRED WITH LOW PROFILE PLUGS FOR EASY INSTALLATION



NEED MORE SPACE - CUT INTO AN ADJOINING CABINET TO REACH AN OUTLET THERE





WHEN INSTALLING WITH THE HINGE SIDE NEXT TO A WALL - LEAVE ADEQUATE SPACE FOR CABINET HANDLES


DOOR MUST BE ABLE TO OPEN A MINIMUM OF 90°.

OVERLAY FRAME DIMENSIONS


23-3/4”
(603mm)



29-3/4”
(756mm)



TO ACCOMMODATE THE HINGE PINS ON THE HINGE SIDE OF THE PANEL Drill a hole at least 5/16" in diameter and 1" deep into the top and bottom of the frame in the location shown.

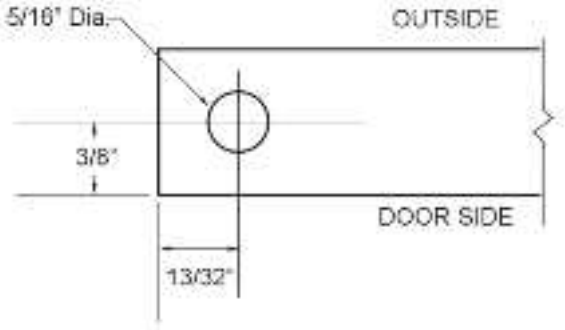

THE DOOR STOP IS SET AT 110° BUT CAN BE RESET TO 90° OR 140°.

IF THE DOOR CANNOT OPEN FULLY YOU CANNOT EXTEND THE RACKS.

XO the next level in luxury appliances

xoappliance.com | 800.966.8300