HR 1422-3 I
30" Range
Fully electric model with induction cooktop and DirectSelect controls



- Turn dial operation with display – DirectSelect
- State-of-the-art cooktop technology – four induction cooking zones
- Fast heating time and even heat distribution – TwinPower
- Minimal cleaning effort – Self-cleaning
- Easy opening & closing – noise and vibration absorbers

EAN: 4002516755906 / Material number: 12298850 /
Old Material Number: 25142281USA

General information	
Model number	HR 1422-3 I
Manufacturer material number	12298850
EAN number	4002516755906
Marketing class	Gold
Heating type	
Electric/Induction	•
Cooktop	Induction
Construction type and design	
Range	•
Appliance width in inches	30
Oven display	DirectSelect
Appliance color	Stainless steel/Clean Touch Steel
Operating modes	
Maxi Broil	•
Convection Bake	•
Convection Roast	•
Surround	•
Bake	•
Convection Broil	•
Cooktop features	
Heating type	Induction
Number of induction cooking zones	4
Number of cooking zones with Booster function	4 cooking zones
Number of cooking zones with TwinBooster	2 cooking zones
Power level display	1 - 9
Number of cooking zones with keeping warm function	4 rings
Number of vario cooking zones	4 rings
Residual heat indicator	•
User convenience	
Precision knobs	•
SoftClose oven door/ SoftOpen	•
Automatic switch-off	•
Time of day display	•
Minute minder	•
Programmable cooking time	•
Individual settings	•
Oven compartment	
Oven cavity volume in cu. ft. (l)	4.59 (130) ft³ (l)
Number of oven shelf levels	6
No. of halogen lamps	double
TwinPower hot air fans	•
Efficiency	
Rapid PreHeat	•
Cleaning convenience	
Stainless-steel front with partial Clean Touch Steel finish	•
Oven with self-cleaning program	•


HR 1422-3 I
30" Range
Fully electric model with induction cooktop and DirectSelect controls



EAN: 4002516755906 / Material number: 12298850 /
Old Material Number: 25142281USA


Cooktop surface	Ceramic surface
CleanGlass door	•
Safety	
Appliance cooling system and cool touch front	•
Safety cut-out	•
System lock	•
Door contact switch	•
Door lock during self cleaning	•
Technical data	
Appliance height min in in.(mm)	35 5/8 (902)
Dimensions (depth) in in. (mm) with bullnose	27 5/8 (702)
Appliance height max in in.(mm)	37 1/8 (940)
Frequency in Hz	60
Mains plug	NEMA plug: 14-50
Appliance width in in. (mm)	30 (762)
Power Rating in V	120
Voltage in V	240/208
Fuse rating in A	50
Number of phases	1
Standard accessories	
Self Clean ready baking and roasting rack	1
Self clean ready baking and roasting racks with rail system	1
Side racks self clean ready	1

HR 1422-3 I
30" Range
Fully electric model with induction cooktop and DirectSelect controls

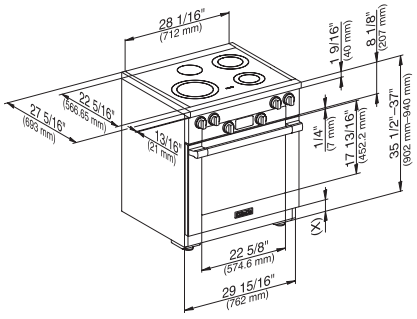


HR1421, HR1421-3, HR1422-3 i (installation drawing)

E = Electric connection

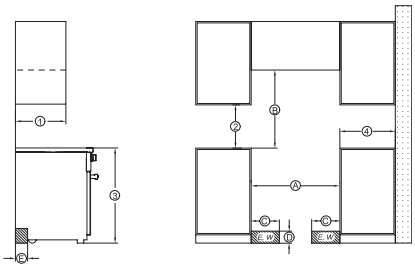


HR1422-3i, HR1622-3i, HR1432-3i, HR1632-3i – Installation drawing

? Maximum depth of top cabinet , ? Minimum distance to bottom edge of top cabinet , ? Distance from the floor to cooktop surface, ? Minimum distance to combustible surfaces , , E = Electric connection , W = Water connection, , (A) Width of cabinet opening , (B) Minimum distance between the top of the cooking area and the bottom of an unprotected combustible surface., Minimum distance to a protected combustible surface or when a Miele Ventilation Hood is installed. For all other, Hoods please consult the manufacturer's specifications for required distances., (C) Maximum connection width right and left , (E) Maximum connection height

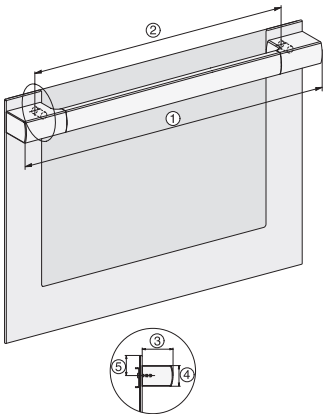


HR11xx-3, HR14xx-3, HR16xx-3i, HR17xx-3, HR19xx-3 installation drawings

30", ? 20 ¾" / 527,6 mm, ? 16 5/8" / 422,6 mm, ? 2 ½" / 64 mm, ? 1 11/16" / 43 mm, ? 1 11/16" / 42,5 mm, , 36", ? 28 9/16" / 725 mm, ? 22 5/8" / 575 mm, ? 2 ½" / 64 mm, ? 1 11/16" / 43 mm, ? 1 11/16" / 42,5 mm

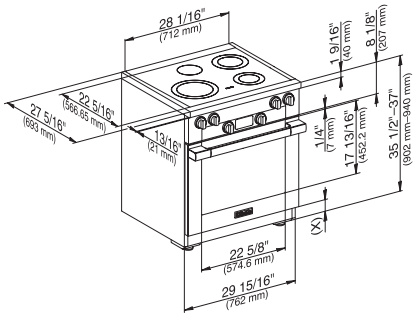

HR1421-3, HR1422-3i (installation drawing)

(x) = Toe-kick height adjustment 5" – 6 1/2" (127 mm – 165.1 mm)

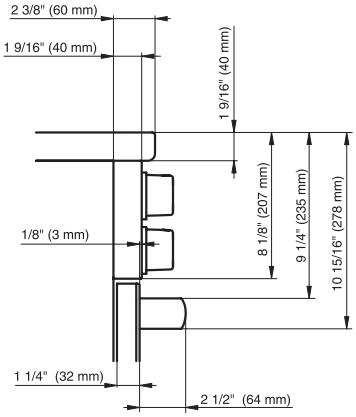

HR1421-3, HR1422-3i , HR1432-3I (installation drawing)