XOVD136_
XOVD148_

DESIGNER CANOPY

HOW BEAUTIFUL KITCHENS BREATHE





POWERED BY
XOIL INSERT /LINER
(sold separately)

- Choose from 2 Sizes and 4 Finishes
- Choose CCC 395 | 600 CFM or 1000 CFM
- Optional ADA Compliant Remote Control
- 5 Minute delay function

DESIGNED AND CRAFTED IN ITALY

XO Appliance introduces its latest designer canopy hood, a stunning blend of form and function that elevates any kitchen. This canopy hood is available in four luxurious finishes: Satin Gold, Matte White, Matte Black, and Stainless Steel, offering a sophisticated touch to match any style.

At XO, we believe that a good design is something everyone can afford


WORLD CLASS SERVICE | COMPREHENSIVE WARRANTIES

OUR LASTING COMMITMENT TO YOU

XO LOVE IT OR LEAVE IT
100% GUARANTEED
For 90 days, all our products are backed by our unique Love It or Leave It Guarantee*

XOVD136__

DESIGNER CANOPY

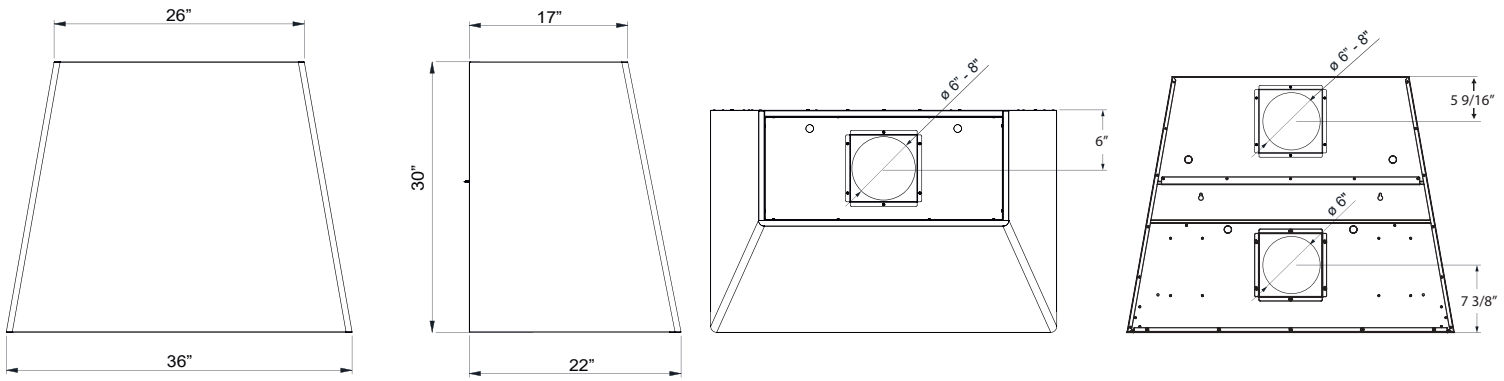

Specify: XOVD136SS (Stainless Steel) | XOVD136MB (Black) | XOVD136MW (White) | XOVD136SG (Gold)

This model requires the purchase of either:
XOIL3619SC (395 | 600 CFM) - or - XOIL3619KSE (1000 CFM)
Combination Insert/Liner

DESIGNED & CRAFTED IN ITALY
Fabriano Collection

FEATURES

FINISH

Stainless Steel
Matte Black
Matte White
Satin Gold



FEATURES

- Requires Your Selection of XOIL Insert Liner (Sold Separately)
- Designer Inspired Architecture
- Meticulously handcrafted
- This beautifully designed hood makes the perfect focal point for any luxury kitchen.
- The custom look without custom lead times
- Available in 4 Designer Finishes
- Designed and Crafted in Italy
- Two Year In-Home Parts and Labor Warranty

PERFORMANCE

SPEED	1	2	3	BOOST
CFM	160	250	395	600
SONES	1.0	2.5	4.0	6.5
CFM	390	550	750	1000
SONES	2.0	6.2	7.0	8.0

SPECIFICATIONS

ELECTRICAL 120V 60Hz 3.6 AMP (SC)
120V 60Hz 6.6 AMP (KSE)

DIMENSIONS

36" W x 22" D x 30" H

MOUNTING HEIGHT

ABOVE COOKING 27" - 32"

OPTIONS

Recirculation Kit*	**XORFK12**
Recirculation Filters	**XORFRND**
ADA Compatible Remote	**XOVREMOTE1**
Make Up Air Kit (6")	**XOMA06**
Make Up Air Kit (8")	**XOMA08**

*Recirculation limited to 600 CFM Max Blowers. Filtered, recirculated air must be returned to the living space.


XO the next level in luxury appliances
xoappliance.com | 800.966.8300

UL LISTED

XO is exclusively distributed by
EASTERN MARKETING CORP.
24 Eisenhower Parkway
Roseland, NJ 07068

XOVD148__

DESIGNER CANOPY

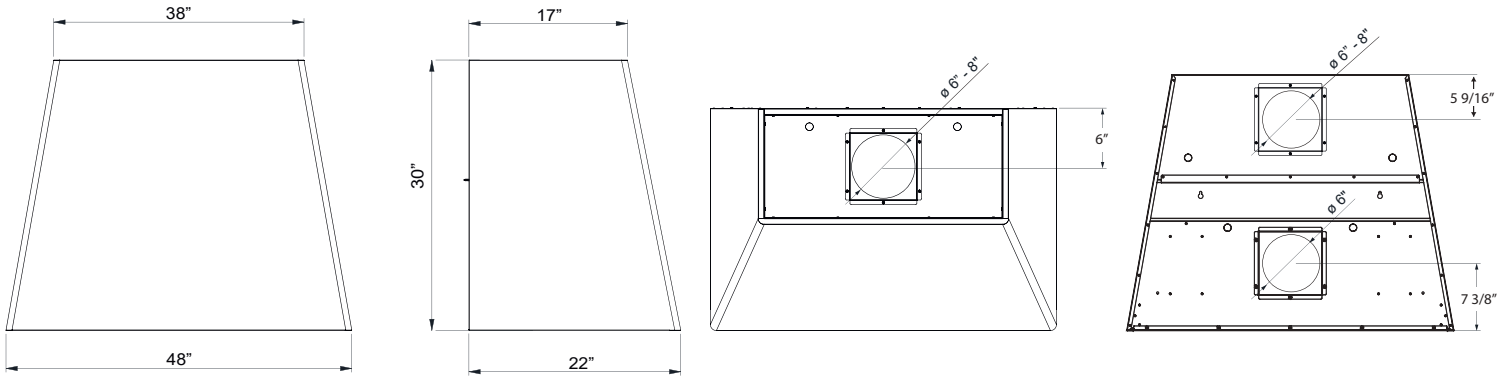

Specify: XOVD148SS (Stainless Steel) | XOVD148MB (Black) | XOVD148MW (White) | XOVD148SG (Gold)

This model requires the purchase of either:
XOIL4819SC (395 | 600 CFM) - or - XOIL4819KSE (1000 CFM)
Combination Insert/Liner

DESIGNED & CRAFTED IN ITALY
Fabriano Collection

FEATURES

FINISH

Stainless Steel
Matte Black
Matte White
Satin Gold



FEATURES

- Requires Your Selection of XOIL Insert Liner (Sold Separately)
- Designer Inspired Architecture
- Meticulously handcrafted
- This beautifully designed hood makes the perfect focal point for any luxury kitchen.
- The custom look without custom lead times
- Available in 4 Designer Finishes
- Designed and Crafted in Italy
- Two Year In-Home Parts and Labor Warranty

PERFORMANCE

SPEED	1	2	3	BOOST
CFM	160	250	395	600
SONES	1.0	2.5	4.0	6.5
CFM	390	550	750	1000
SONES	2.0	6.2	7.0	8.0

SPECIFICATIONS

ELECTRICAL 120V 60Hz 3.6 AMP (SC)
120V 60Hz 6.6 AMP (KSE)

DIMENSIONS

48" W x 22" D x 30" H

MOUNTING HEIGHT

ABOVE COOKING 27" - 32"

OPTIONS

Recirculation Kit*	**XORFK12**
Recirculation Filters	**XORFRND**
ADA Compatible Remote	**XOVREMOTE1**
Make Up Air Kit (6")	**XOMA06**
Make Up Air Kit (8")	**XOMA08**

*Recirculation limited to 600 CFM Max Blowers. Filtered, recirculated air must be returned to the living space.

XO the next level in luxury appliances
xoappliance.com | 800.966.8300

UL LISTED

XO is exclusively distributed by
EASTERN MARKETING CORP.
24 Eisenhower Parkway
Roseland, NJ 07068

RECOMMENDED MOUNTING HEIGHT

All range hoods have a recommended range of installation height over the cooking surfacece. However cooking styles, types of cooking equipment and installation limitations can vary greatly. For installations outside the recommended range - consult XO.

DEPENDING UPON THE XOIL INSERT MODEL USED YOUR INSTALLATION MAY REQUIRE EITHER A 6" OR 8" DUCT - SOME INSTALLATIONS MAY PERMIT A REAR EXHAUST DISCHARGE. CONSULT THE MANUAL FOR ADDITIONAL INFORMATION.



SIDE VIEW

RECIRCULATION

Recirculation of the exhaust is possible but is limited to 600 CFM Maximum.
An accommodation must be made to return the filtered exhaust to the living space. Never discharge the exhaust into a confined space such as a soffit, attic, garage, crawl space or the voids between walls.

HOW DOES CODE COMPLIANCE CONTROL HELP -

Code Compliance Control

CODE COMPLIANCE CONTROL (CCC) enables the installer to re-program the hood as it is being installed. Your XO Hood is set to operate at 600 CFM maximum at the factory.

Re-programing is accomplished quickly and requires no special tools or additional parts but once done, the air flow rate is limited to a maximum of 395 CFM below the 400 CFM cap that most local codes impose eliminating the need for additional controls.

Re-programming also disables the Power Boost function. After conversion, the installer affixes a label stating the unit has been converted to 395 CFM max. Once done, the unit cannot be changed back.

If your application calls for a make-up air solution, XO gives you more choices.

Code Compliaance Controls are not available on 1000 CFM models.