XOVW_SC
WALL MOUNT HOOD

HOW BEAUTIFUL KITCHENS BREATHE





XOVW_SC

- 4 Speed Electronic Control
- Powerful, Precision Balanced Blower
- High Efficiency 3000K LED Lights
- 5 Minute Delay Function

POWERFUL 600CFM - DESIGNED AND CRAFTED IN ITALY

The XOVW makes a statement with its strong profile, angled stainless steel pro baffle filters and brilliant LED lighting. Equipped with a 395 | 600 CFM blower its 24" deep canopy is ready to handle your most challenging ventilation requirements. Designed and fabricated in Italy for a peerless fit and finish.

At XO, we believe that a good design is something everyone can afford


WORLD CLASS SERVICE | COMPREHENSIVE WARRANTIES

OUR LASTING COMMITMENT TO YOU

XO LOVE IT OR LEAVE IT
100% GUARANTEED
For 90 days, all our products are backed by our unique Love It or Leave It Guarantee*

XOVW_SC

WALL MOUNT HOOD

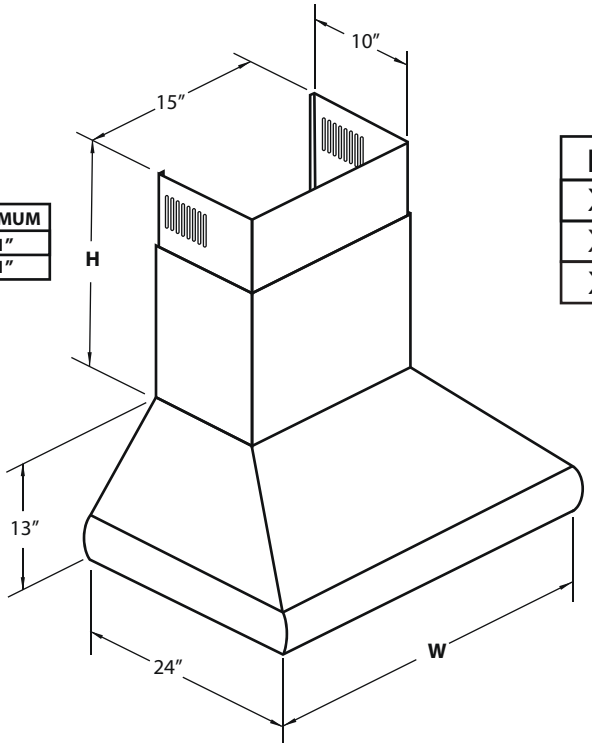

"H"	MINIMUM	MAXIMUM
DUCTED	16"	31"
RECIRCULATING	20"	31"

MODEL	"W"
XOVW30SC	30"
XOVW36SC	36"
XOVW42SC	42"

DESIGNED & CRAFTED IN ITALY
Fabriano Collection

FEATURES

FINISH

Stainless Steel

FEATURES

- Powerful, Precision Balanced 395/600 CFM Blower
- Pro Kitchen Depth (24") Max burner coverage
- Tilt Design Electronic 3 Speed + Boost Controls
- Powerful LED Lighting - 50% Brighter
- Dishwasher Safe SS Pro Baffle Grease Filters
- 5 Minute Delay Auto Shutoff Timer
- ADA Compliant with Wireless Remote (optional)
- Telescopic Duct Cover up to 9' Ceilings
- 6" Vertical Duct or Recirculating (kit sold separately)
- Designed and Crafted In Italy
- Two Year In-Home Parts and Labor Warranty

PERFORMANCE

SPEED	1	2	3	BOOST
CFM	150	250	395	600
SONES	1.0	2.4	4.0	6.4

SPECIFICATIONS

ELECTRICAL 120V 60HZ 3.6 AMP

DIMENSIONS

H MAX 44" - MIN 33" (Recirc)
MAX 44" - MIN 29" (Vented)
W 30" - 36" - 48"
D 24"
(Refer to illustration above)

MOUNTING HEIGHT

ABOVE COOKING 27" - 32"

OPTIONS

Recirculation Kit	**XORFK04**
Recirculation Carbon Filter	**XORFRND**
6" Make-Up Air Kit	**XOMA06**
ADA Compliant Remote	**XOVREMOTE1**
12' Ceiling Duct Cover Ext.	**XOEDC12W**

XO the next level in luxury appliances
xoappliance.com | 800.966.8300

UL LISTED

XO is exclusively distributed by
EASTERN MARKETING CORP.
24 Eisenhower Parkway
Roseland, NJ 07068

XOVW_SC

WALL MOUNT HOOD


RECOMMENDED MOUNTING HEIGHT

All range hoods have a recommended range of installation height over the cooking surfacece. However cooking styles, types of cooking equipment and installation limitations can vary greatly. For installations outside the recommended range - consult XO.

THESE MODELS HAVE A 6” DIAMETER EXHAUST DUCT

RECIRCULATION

Recirculation of the exhaust is an option.
This requires the purchase of a kit (XORFK04) sold separately. Located in the duct cover are vent slots which will return the exhaust to the living space. Never discharge the exhaust into a confined space such as a soffit, attic, garage, crawl space or the voids between walls.

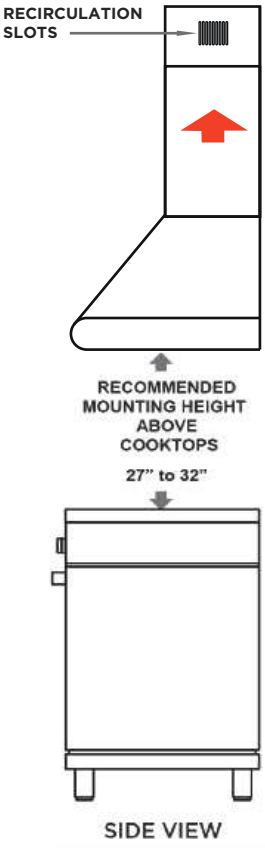

SIDE VIEW

HOW DOES CODE COMPLIANCE CONTROL HELP -

CODE COMPLIANCE CONTROL (CCC) enables the installer to re-program the hood as it is being installed. Your XO Hood is set to operate at 600 CFM maximum at the factory.

Re-programing is accomplished quickly and requires no special tools or additional parts but once done, the air flow rate is limited to a maximum of 395 CFM below the 400 CFM cap that most local codes impose eliminating the need for additional controls.

Re-programming also disables the Power Boost function. After conversion, the installer affixes a label stating the unit has been converted to 395 CFM max. Once done, the unit cannot be changed back.

If your application calls for a make-up air solution, XO gives you more choices.