# XOVV2_SC
WALL MOUNT HOOD

## HOW BEAUTIFUL KITCHENS BREATHE






**XOVV2_SC**

- 4 Speed Electronic Control
- Powerful, Precision Balanced Blower
- High Efficiency 3000K LED Lights
- 5 Minute Delay Function

## POWERFUL 600CFM - DESIGNED AND CRAFTED IN ITALY

The XOVV makes a statement with its strong profile, angled stainless steel pro baffle filters and brilliant LED lighting. Equipped with a 395 | 600 CFM blower its 24" deep canopy is ready to handle your most challenging ventilation requirements. Designed and fabricated in Italy for a peerless fit and finish.

At XO, we believe that a good design is something everyone can afford


WORLD CLASS SERVICE | COMPREHENSIVE WARRANTIES

OUR LASTING COMMITMENT TO YOU

XO LOVE IT OR LEAVE IT
100% GUARANTEED
For 90 days, all our products are backed by our unique Love It or Leave It Guarantee*

# XOVV2_SC

## WALL MOUNT HOOD

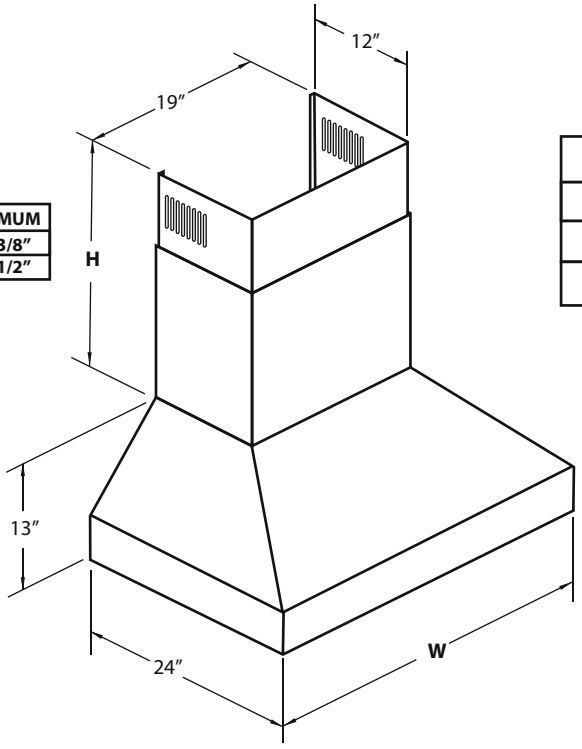


| "H" | MINIMUM | MAXIMUM |
|---|---|---|
| DUCTED | 15″ | 26-3/8″ |
| RECIRCULATING | 19″ | 30-1/2″ |

| MODEL | "W" |
|---|---|
| XOVV230SC | 30" |
| XOVV236SC | 36" |
| XOVV248SC | 48" |

DESIGNED & CRAFTED IN ITALY
Fabriano Collection

## FEATURES

**FINISH**

Stainless Steel

**FEATURES**

- Powerful, Precision Balanced 395/600 CFM Blower
- Pro Kitchen Depth (24") Max burner coverage
- Tilt Design Electronic 3 Speed + Boost Controls
- Powerful LED Lighting - 50% Brighter
- Dishwasher Safe SS Pro Baffle Grease Filters
- 5 Minute Delay Auto Shutoff Timer
- ADA Compliant with Wireless Remote (optional)
- Telescopic Duct Cover up to 9′ Ceilings
- 6" Top or Rear Duct or Recirculating (kit optional)
- Designed and Crafted In Italy
- Two Year In-Home Parts and Labor Warranty

## PERFORMANCE

| SPEED | 1 | 2 | 3 | BOOST |
|---|---|---|---|---|
| CFM | 150 | 250 | 395 | 600 |
| SONES | 1.0 | 2.4 | 4.0 | 6.4 |

## SPECIFICATIONS

**ELECTRICAL** 120V 60HZ 3.6 AMP

**DIMENSIONS**

H MAX 43-1/2" - MIN 32" (Recirc)
MAX 39-3/8" - MIN 28" (Vented)
W 30" - 36" - 48"
D 24"
(Refer to illustration above)

**MOUNTING HEIGHT**

ABOVE COOKING 27" - 32"

**OPTIONS**

| | |
|---|---|
| Recirculation Kit | **XORFK04** |
| Recirculation Carbon Filter | **XORFRND** |
| 6" Make-Up Air Kit | **XOMA06** |
| ADA Compliant Remote | **XOVREMOTE1** |
| 12′ Ceiling Duct Cover Ext. | **XOEDC12V2** |




UL LISTED



XO is exclusively distributed by
EASTERN MARKETING CORP.
24 Eisenhower Parkway
Roseland, NJ 07068

# XOVV2_SC

## WALL MOUNT HOOD

### RECOMMENDED MOUNTING HEIGHT

All range hoods have a recommended range of installation height over the cooking surfacece. However cooking styles, types of cooking equipment and installation limitations can vary greatly. For installations outside the recommended range - consult XO.

THESE MODELS HAVE A 6” DIAMETER EXHAUST DUCT

### RECIRCULATION

Recirculation of the exhaust is an option.
This requires the purchase of a kit (XORFK04) sold separately. Located in the duct cover are vent slots which will return the exhaust to the living space. Never discharge the exhaust into a confined space such as a soffit, attic, garage, crawl space or the voids between walls.




SIDE VIEW

## HOW DOES CODE COMPLIANCE CONTROL HELP -

**CODE COMPLIANCE CONTROL (CCC)** enables the installer to re-program the hood as it is being installed. Your XO Hood is set to operate at 600 CFM maximum at the factory.

Re-programing is accomplished quickly and requires no special tools or additional parts but once done, the air flow rate is limited to a maximum of 395 CFM below the 400 CFM cap that most local codes impose eliminating the need for additional controls.

Re-programming also disables the Power Boost function. After conversion, the installer affixes a label stating the unit has been converted to 395 CFM max. Once done, the unit cannot be changed back.

If your application calls for a make-up air solution, XO gives you more choices.




UL LISTED



XO is exclusively distributed by
EASTERN MARKETING CORP.
24 Eisenhower Parkway
Roseland, NJ 07068