LG SIGNATURE

DLEX9900_/ DLGX9901_

LG Signature 9.0 cu ft. Mega Capacity Smart Front Load Dryer

KEY FEATURES

- 9.0 cu.ft. Capacity
- Full Touch LCD Screen
- AI Sensor Dry
- 25 Drying Programs
- TurboSteam®





Control Panel



Open View



LG ThinQ® App

PRODUCT FEATURES

SUMMARY	
Capacity (cu.ft.)	9.0 cu.ft.
Matching Washer	WM9900HSA/ WM9901HBA
Color	Brushed Platinum Steel Brushed Black Steel
ENERGY	
ENERGY STAR® Certified	Yes
CEF	Electric: 3.94 Gas: 3.49
APPEARANCE	
Control & Display	Full Touch LCD Screen
Touch Buttons	Yes
DRYER PROGRAM	
Number of Programs	25 Normal, AI Dry, Bedding, Delicates, Towels, Quick Dry, Timed Dry, Antibacterial, Perm. Press, SteamFresh™, Heavy Duty, Air Dry, SteamSanitary™, Super Dry, Activewear, Jeans, Blanket Refresh, Low Temp Dry, Easy Ironing, Small Load, Large Load, XL Load, Anti-Wrinkle, Overnight Dry, Rack Dry
DRYER OPTIONS	
Number of Options	15 Wi-Fi, Remote Start, Drum Light, Control Lock, Cycle List Edit, Signal, Brightness, Cycle Optimization, Smart Diagnosis, Factory Reset, TurboSteam®, Wrinkle Care, Damp Signal, Energy Saver, Low Static

DRYER DETAILS	
No. of Temps	5
	High, Med.High, Medium, Med. Low, Low
Manual Dry Times	10-100 min. (each 5min), Dry Time
FABRIC CARE FEATURES	
AI Sensor Dry	Yes
Sensor Dry	Yes
Precise Temperature Control with Variable Heater	Yes
Steam	TurboSteam®
CONVENIENCE FEATURES	
3 Minute Installation Check	Yes
End of Cycle Signal	Yes
Drum Light (door open)	Yes
Reversible Door	Yes
FlowSense® Duct Clogging Indicator	Yes
Wrinkle Care Option	Yes
Control Lock	Yes
Venting Option	Electric: 4 Ways Venting Gas: 3 Ways Venting
Leveling Legs	4 Adjustable Legs
Remaining Time Display/Status Indicator(s)	Yes
THINQ® TECHNOLOGY	
Smart Diagnosis (v3.0)	Yes
Wi-Fi	Yes
ThinQ Care (Remote Start/Cycle Monitor)	Yes
Energy Monitoring	Yes (WiFi)
MATERIALS AND FINISHES	
NeveRust® Stainless Steel Drum	Yes
Cabinet	VCM
Door	Tempered Glass Door
All Available Color	Brushed Platinum Steel Brushed Black Steel

POWER SOURCE	
Ratings	CSA Listed
Electrical Requirements	240V 26 Amps (Electric) 120V, 13 Amps (Gas)
Type	Electric / Gas
BTU Rating	Electric: N/A, Gas: 20,000
OPTIONS / ACCESSORIES	
LP Conversion Kit	383EEL3002D // LPK1
Side Venting Kit	383EEL9001L
Drying Rack	AHB73109002
Pedestal	WDP8S, WDP8B
Pedestal (WxHxD)	29 x 13 5/8" x 29 1/2" (45 9/16" D with door open)
DIMENSIONS	
Product (WxHxD)	29" x 40 7/8" x 31 1/2"
Depth with Door Open	53 3/8"
Carton (WxHxD)	30 15/16" x 44 11/16" x 33 3/16"
Weight (Product/Carton)	145.3 / 157 lbs.
LIMITED WARRANTY	
Parts and Labor	1 Year
Drum	3 Years
UPC CODE	
DLEX9900S	195174071410
DLGX9901S	195174071427
DLEX9900B	195174119808
DLGX9901B	195174120446

© 2025 LG Electronics USA, Inc. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp. All other product and brand names are trademarks or registered trademarks of their respective owners. Design, features and specifications are subject to change without notice. Non-metric weights and measurements are approximate. Some features may require Internet access. Content and services may vary by product and are subject to change without notice. 6/22/26

DLEX9900_ / DLGX9901_

LG SIGNATURE Front Load Dryer

IMPORTANT


QUICK INSTALL & CLEARANCES

For full installation directions/clearances please refer to the corresponding User Manual and Installation Guide.

DIMENSIONS	
A Upper Ventilation Opening	≥ 48 sq. in. (310 cm2)
B Lower Ventilation Opening	≥ 24 sq. in. (155 cm2)
C Distance to Ventilation Opening	≥ 3″
D Overhead Cabinet Depth	≤ 14″
E Distance to the Overhead Cabinet/Shelf	≥ 18″
F Front Clearance	1″
G Depth	31 1/2″
H Back Clearance	≥ 5″
I Side Clearance	≥ 1″
J Width	29″
K Height of Cabinet Opening	40 7/8″
Carton Dimentions (in) (W x H x D)	30 15/16″ x 44 11/16″ x 33 3/16″
ENERGY	
ENERGY STAR® Certified	Yes
CEF	3.94
POWER SOURCE	
Ratings	CSA Listed
Electrical Requirements	240V 26 Amps (Electric) 120V, 13 Amps (Gas)

CONNECTING THE GAS SUPPLY


- Installation and service must be performed by a qualified installer, service agency, or the gas supplier.
- Use only a new stainless steel flexible connector and a new AGA-certified connector.
- A gas shutoff valve must be installed within 6 ft. (1.8 m) of the dryer.
- The dryer is configured for natural gas when shipped from the factory. Make sure that the dryer is equipped with the correct burner nozzle for the type of gas being used (natural gas or propane gas).

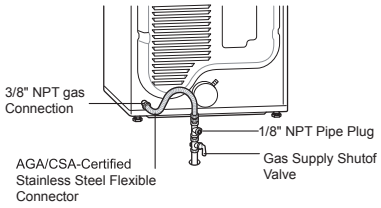


- If necessary, the correct nozzle (for the LP nozzle kit, order part number 383EEL3002D) should be installed by a qualified technician and the change should be noted on the dryer. (2)
- All connections must be in accordance with local codes and regulations. Gas dryers MUST exhaust to the outdoors.

CONNECTING THE ELECTRIC SUPPLY

- **A 4-wire connection** is required for all mobile and manufactured home installations, as well as all new construction **after January 1, 1996.**
- **A 3-wire connection is NOT permitted** on new construction **after January 1, 1996.**
- A UL-listed strain relief is required.
- Use a 30-amp, 240-volt, 4-wire, UL-listed power cord with #10 AWG-minimum copper conductor and closed loop or forked terminals with upturned ends.



PRODUCT DIMENSIONS

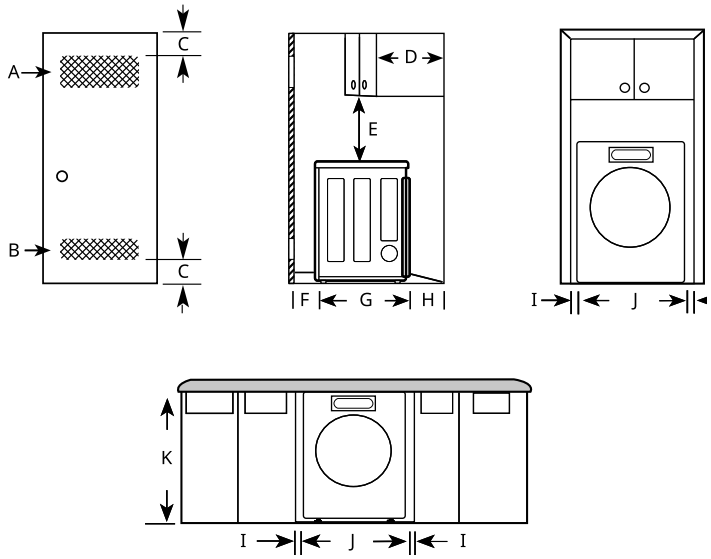


VENTING THE DRYER


Follow the guidelines below to maximize drying performance and reduce lint buildup and condensation in the ductwork. Ductwork and fittings are NOT included and must be purchased separately.

- Use 4-inch (10.2 cm) diameter rigid, semi-rigid or flexible metal ductwork.
- The exhaust duct run should be as short as possible.
- Use as few elbow joints as possible.
- The male end of each section of exhaust duct must point away from the dryer.
- Use duct tape on all duct joints.
- Insulate ductwork that runs through unheated areas in order to reduce condensation and lint buildup on duct surfaces.
- Incorrect or inadequate exhaust systems are not covered by the dryer warranty. Dryer failures or service required because of such exhaust systems will not be covered by the dryer warranty.

Correct Venting



Incorrect Venting



- Ductwork is not provided with the dryer. You should obtain the necessary ductwork locally. The vent hood should have hinged dampers to prevent backdraft when the dryer is not in use.
- The total length of flexible metal duct must not exceed 8 ft. (2.4 m).
- Deduct 6 ft. (1.8 m) for each additional elbow. Do not use more than four 90° elbows.

Wall Cap Type	Number of 90° Elbows	Maximum length of 4-inch diameter rigid metal duct
Recommended	0	65 ft.(19.8 m)
	1	55 ft.(16.8 m)
	2	47 ft.(14.3 m)
	3	36 ft.(11.0 m)
a: 4" (10.2 cm)	4	28 ft.(8.5 m)
Use only for short run installations	0	55 ft.(16.8 m)
	1	47 ft.(14.3 m)
	2	41 ft.(12.5 m)
	3	30 ft.(9.1 m)
b: 2.5" (6.35 cm)	4	22 ft.(6.7 m)

© 2018 LG Electronics USA, Inc. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp. All other product and brand names are trademarks or registered trademarks of their respective owners. Design, features and specifications are subject to change without notice. Non-metric weights and measurements are approximate. Some features may require Internet access. Content and services may vary by product and are subject to change without notice. 6/22/2026