DAC 2247 Stella
Ceiling extractor
45 7/8 (1165) in (mm) | 473.81 (805) ft³/min (m3/h) | ?? | Remote control | Con@ctivity



- Suitable for every home – vented or recirculating
- Convenient operation – with Con@ctivity and remote control included
- Powerful – 473.81 (805) ft³/min (m3/h) in Booster level
- Efficient filtration- 10-ply stainless steel grease filters
- Safe and easy to clean – Miele CleanCover

EAN: 4002516805946 / Material number: 12565890 /
Old Material Number: 28C2247SUSA

General information	
Model number	DAC 2247 Stella
Manufacturer material number	12565890
EAN number	4002516805946
Marketing class	Platinum
Design	
Ceiling fan	•
Construction type and design	
Color	Stainless steel
Operating modes	
Recirculated mode	Can be retrofitted
OdorFree charcoal filter (order separately)	DKF 40-R
Design	
Edge extraction	•
User convenience	
Miele@home	•
Electronic controls	•
Con@ctivity	Personalised
Power levels (number excl. Intensive)	3
EasySwitch	•
ON/OFF switch	•
Booster levels	1
Delayed shutdown for 5 or 15 minutes	•
Grease filter saturation indicator	•
Active charcoal filter saturation indicator	•
Smart Extras	
DynamicWhite	•
RemoteUpdate	•
AutoRefresh	•
Push notifications	•
Smart Home Integration	•
Smart Extras	
Voice control	•
Google voice control	•
Efficiency	
PowerManagement system	•
Cleaning convenience	
Easy to clean canopy interior CleanCover	•
Filter system	
Number of dishwasher-safe stainless steel grease filters (10-ply)	4
Lighting	
Number x W	2 x 7,2 W
Light intensity in Lx	450 lx
Color temperature in K	3500 Kelvin
Blower	
Dual-action blower	•


DAC 2247 Stella
Ceiling extractor
45 7/8 (1165) in (mm) | 473.81 (805) ft³/min (m3/h) | ?? | Remote control | Con@ctivity



EAN: 4002516805946 / Material number: 12565890 /
Old Material Number: 28C2247SUSA

Exhaust air	
Air throughput in CFM in Booster	474
Air throughput in Intensive setting (cfm)	473.81 (805)
Safety	
Safety shut-off	•
Technical data	
Overall min. height for vented and external in in. (mm)	11 5/8 (296)
Overall max. height for vented and external in in. (mm)	11 5/8 (296)
Overall min. height for recirculation in in. (mm)	11 5/8 (296)
Overall max. height for recirculation in in. (mm)	11 5/8 (296)
Minimum height above electric hobs in mm	24 (610)
Canopy width in in. (mm)	45 7/8 (1165)
Canopy height in in. (mm)	11 5/8 (296)
Minimum height above gas hobs (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	26 (660)
Electrical plug	NEMA plug: 5–15
Net weight in lbs. (kg)	50 (22.3)
Depth of hood canopy in in. (mm)	19 5/8 (500)
Length of electrical wire in ft (m)	2 (0.7)
Standard plug fitted	•
Total connected load in kW	0.19
Voltage in V	120
Fuse rating in A	15
Number of phases	1
Frequency in Hz	60
Installation note	
Vent connection on side	•
Diameter of vent connection in in.(mm)	6 (150)
Standard accessories	
Reducer from 150 to 125 mm Ø	•
Remote control	•
Non-return flap	•

DAC 2247 Stella
Ceiling extractor
45 7/8 (1165) in (mm) | 473.81 (805) ft³/min (m3/h) | ?? | Remote control | Con@ctivity

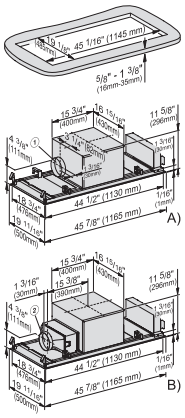

DAC2247, Installation drawings

A) Exhaust air mode, B) Recirculation mode with integrated odour filter, 1) Exhaust air connection ø 150 mm , The connection piece is on the left-hand side ex works., -The housing can be rotated by 90 degrees for exhaust air routing to the front or rear. To allow the housing to be rotated, there must be a free space of 100 mm in the ceiling in front of and behind the ceiling cut-out., -For an exhaust air duct to the right, the extractor bonnet must be installed rotated by 180 degrees., 2) Spigot ø 150 mm as air outlet in Plug&Play mode or for connecting an air duct in ducted recirculation mode. The connection piece is on the left-hand side ex works., -It is not possible to convert the spigot to the front or rear., -For an exhaust air duct to the right, the cooker bonnet must be installed rotated by 180 degrees.