CONVECTION-SPEED OVEN
INSTALLATION CONSIDERATIONS

Accessing your product specifications 3
Electrical connection 6

FISHER & PAYKEL

US CA

MINIMAL

OM30NMUB3, OM30NMUG3, OM30NMUNB3, OM30NMUNG3, OM24NMUNB5, OM24NMUNG5, OM24NMUB5, OM24NMUG5, OM24NMTB5

CONTEMPORARY

OM30NCUDX3, OM30NCTDB3, OM30NCTDX3, OM24NCTDX5, OM24NCUDX5

PROFESSIONAL


OM30NPTX3, OM30NPUX3


ACCESSING YOUR PRODUCT SPECIFICATIONS

For full product, cabinetry and service specifications, refer to the Planning Guide. To access the Planning Guide, scan the QR code or visit fisherpaykel.com/specify. Search by appliance type, product name or model code.

OM30 MINIMAL AND CONTEMPORARY MODELS

OM30NMUB3, OM30NMUG3, OM30NMUNB3, OM30NMUNG3, OM30NCUDX3, OM30NCTDB3, OM30NCTDX3



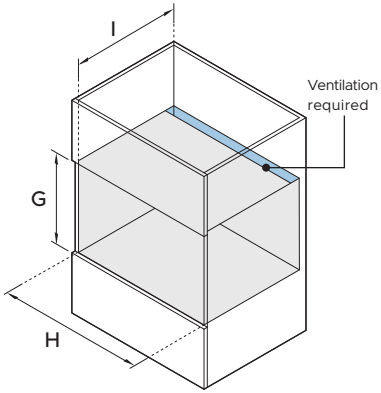

PRODUCT DIMENSIONS		inch	mm
A	Overall height	18	458
B	Overall width	29 7/8	758
C	Chassis height	17 1/8	435
D	Chassis width	28 3/8	720
E	Chassis depth	21 7/16	545
F	Control panel thickness	13/16	20
	Depth with door fully open*	12 5/8	320

*Measured from front of control panel.

CAVITY DIMENSIONS		inch	mm
A	Minimum inside height of cavity	17 5/16	440
B	Minimum inside width of cavity	28 1/2	724
C	Minimum inside depth of cavity*	21 5/8**	550**
	Recommended cabinet height	18 1/8	460
	Recommended cabinet width	30	762


*Excluding control panel thickness.
**Requires ventilation at the rear of the cavity.


ACCESSING YOUR PRODUCT SPECIFICATIONS

For full product, cabinetry and service specifications, refer to the Planning Guide. To access the Planning Guide, scan the QR code or visit fisherpaykel.com/specify. Search by appliance type, product name or model code.

OM30 PROFESSIONAL MODELS

OM30NPTX3, OM30NPUX3



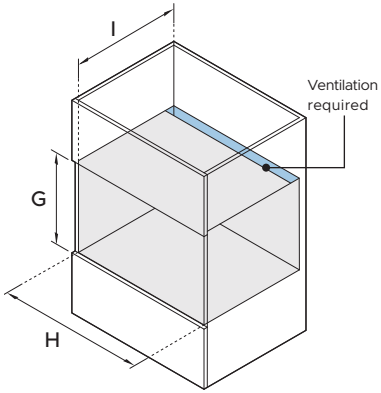

PRODUCT DIMENSIONS		inch	mm
A	Overall height	18	458
B	Overall width	29 7/8	758
C	Chassis height	17 1/8	435
D	Chassis width	28 3/8	720
E	Chassis depth	21 7/16	545
F	Control panel thickness	15/16	24
	Depth with door fully open*	12 5/8	320

*Measured from front of control panel.


CAVITY DIMENSIONS		inch	mm
A	Minimum inside height of cavity	17 5/16	440
B	Minimum inside width of cavity	28 1/2	724
C	Minimum inside depth of cavity*	21 5/8**	550**
	Recommended cabinet height	18 1/8	460
	Recommended cabinet width	30	762


*Excluding control panel thickness.
**Requires ventilation at the rear of the cavity.

For full product, cabinetry and service specifications, refer to the Planning Guide. To access the Planning Guide, scan the QR code or visit fisherpaykel.com/specify. Search by appliance type, product name or model code.

OM24 MINIMAL AND CONTEMPORARY MODELS

OM24NMUNB5, OM24NMUNG5, OM24NMUB5, OM24NMUG5, OM24NMTB5, OM24NCTDX5, OM24NCUDX5



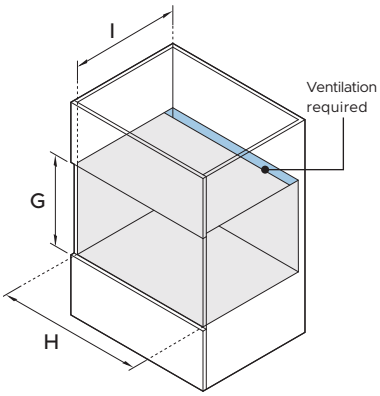

PRODUCT DIMENSIONS		inch	mm
A	Overall height	18	458
B	Overall width	23 7/16	596
C	Chassis height	17 1/8	435
D	Chassis width	21 7/8	556
E	Chassis depth	21 7/16	545
F	Control panel thickness	13/16	20
	Depth with door fully open*	12 3/4	324

*Measured from front of control panel.

CAVITY DIMENSIONS		inch	mm
A	Minimum inside height of cavity	17 5/16	440
B	Minimum inside width of cavity	22 1/16	560
C	Minimum inside depth of cavity*	21 7/16	545**
	Recommended cabinet height	18 1/8	460
	Recommended cabinet width	23 5/8	600

*Excluding control panel thickness.
**Requires ventilation at the rear of the cavity.

SPECIFICATIONS	OM30 AND OM24 MODELS
VOLTAGE (V)	208/240
Hz (AC ONLY)	60
RATED POWER (W)	3300/3900
MICROWAVE RATED OUTPUT (W)	900
MICROWAVE FREQUENCY (MHz)	2450

FISHERPAYKEL.COM

© Fisher & Paykel Appliances 2026. All rights reserved.

The models shown in this guide may not be available in all markets and are subject to change at any time.

The product specifications in this guide apply to the specific products and models described at the date of issue. Under our policy of continuous product improvement, these specifications may change at any time.

For current details about model and specification availability in your country, please go to our website or contact your local Fisher & Paykel dealer.

433045B 09.26