H 7263 BP
24" oven
with clear text display, connectivity, and Self Clean.



- Clear-text display with sensor controls – DirectSensor S
- Minimal cleaning effort – Self-cleaning
- Achieve perfect results with ease – Automatic programs
- Unlimited possibilities – volume of 2.97 cu. ft. on 5 levels
- Network-enabled WiFi appliance – Miele@home

EAN: 4002516976776 / Material number: 12842730 /
Old Material Number: 22726325USA

General information	
Model number	H 7263 BP
Manufacturer material number	12842730
EAN number	4002516976776
Marketing class	Gold
Construction type and design	
Color	Obsidian Black
VitroLine	•
Appliance type and design	
Oven	•
Convenience features	
Rapid PreHeat	•
Operating modes	
Convection Bake	•
Surround	•
Intensive Bake	•
Auto roast	•
Convection Broil	•
Maxi Broil	•
Bake	•
Defrost	•
Automatic programs	•
User convenience	
Networking with Miele@home	•
Control panel	DirectSensor S
SoftOpen	•
SoftClose	•
MultiLingua	•
Time synchronization	•
Minute minder	•
Programming start of cooking duration	•
Programming end of cooking duration	•
Programmable cooking time	•
Actual temperature display	•
Audible signal when desired temperature is reached	•
Default temperature	•
Individual settings	•
Smart Extras	
Push notifications	•
Recipes	•
Smart Extras	
RemoteUpdate	•
Voice control	•
Google voice control	•
Smart Home Integration	•
Cleaning convenience	
Self-cleaning	•
Foldable broil heater element	•


H 7263 BP
24" oven
with clear text display, connectivity, and Self Clean.



EAN: 4002516976776 / Material number: 12842730 /
Old Material Number: 22726325USA


CleanGlass door	•
Safety	
Appliance cooling system and cool touch front	•
Safety cut-out	•
System lock	•
Door lock during self cleaning	•
Technical data	
Cavity volume in cu.ft (l)	2.97 (84)
No. of rack levels	5
Electrical plug	NEMA plug: 14–30
Oven interior lighting	1 halogen spot
Temperatures in °F (°C)	85-575 (30-300)
Niche width min. in inches (mm)	22 (560)
Niche width max. in inches (mm)	22 3/8 (568)
Niche height min. in inches (mm)	23 1/4 (590)
Niche height max. in inches (mm)	23 3/8 (595)
Niche depth in in. (mm)	21 5/8 (550)
Weight in lbs. (kg)	98.11 (44.5)
Total connected load in kW	5.40
Power Rating in V	120
Voltage in V	240/208
Frequency in Hz	60
Fuse rating in A	30
Number of phases	1
Length of power cord in m	1.80
Standard accessories	
Universal tray with PerfectClean HUBB 71	1
Self Clean ready baking and roasting rack	1
Removable Self Clean-ready side racks (pair)	1
Available display languages	
Available display languages via MultiLingua	□□□□□□□, □□, □□□□, deutsch, dansk, english, suomi, français, ελληνικά, italiano, □□□, □□□, hrvatski, bahasa malaysia, nederlands, norsk, polski, português, română, русский, svenska, srpski, slovenčina, slovenščina, español, čeština, türkçe, українська, magyar

H 7263 BP
24" oven
with clear text display, connectivity, and Self Clean.

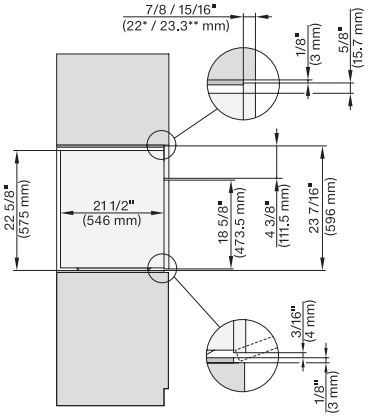


side view, 30 inch Flush inset 650S, installation drawing, NA

7/8" – 22* mm – Glas, 15/16" – 23.3** mm – Edelstahl

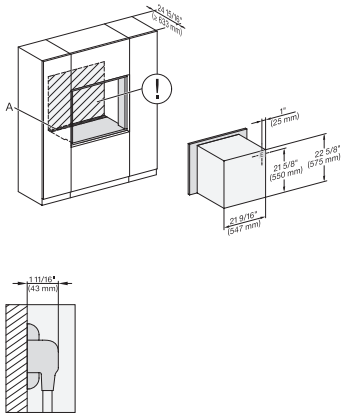


installation 30 inch Flush inset 650S, installation drawing, NA

A – Cut-out (1 9/16" x 19 11/16" / 40 mm x 500 mm) in the bottom of the cabinet for power cord and ventilation, – Electrical and water supplies are recommended to be placed in adjacent cabinetry., Additional cabinet depth is required when placing the electrical and water supplies behind the appliance., E = Electric connection

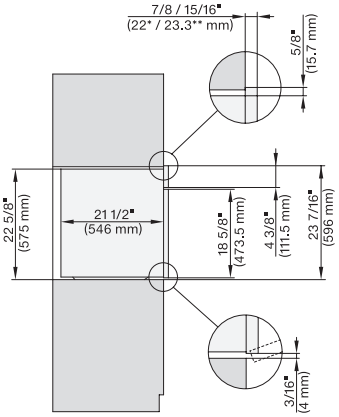


side view 30 inch Proud 650S, installation drawing, NA

7/8" – 22* mm – Glas, 15/16" – 23.3** mm – Edelstahl

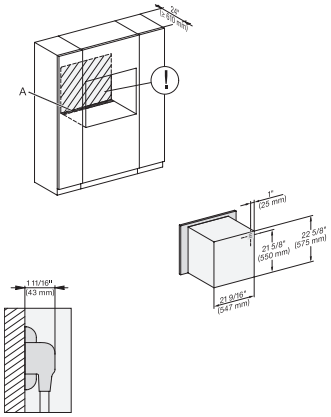


installation 30 inch Proud 650S, installation drawing, NA

A – Cut-out (1 9/16" x 19 11/16" / 40 mm x 500 mm) in the bottom of the cabinet for power cord and ventilation, – Electrical and water supplies are recommended to be placed in adjacent cabinetry., Additional cabinet depth is required when placing the electrical and water supplies behind the appliance., E = Electric connection

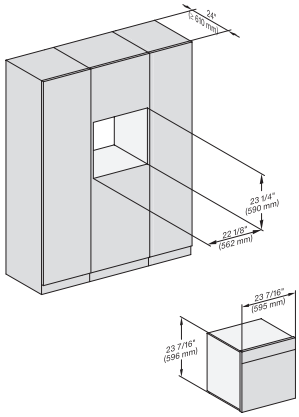

installation Proud 650S, installation drawing, NA

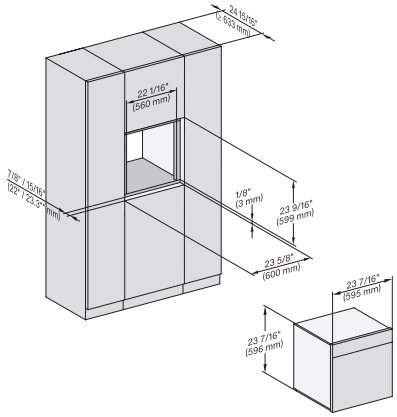

installation Flush inset 650S, installation drawing, NA

7/8" – 22* mm – Glass, 15/16" – 23.3** mm – Stainless steel