XOU15WGSX

15” STAINLESS STEEL SINGLE ZONE WINE COOLER
WITH FIELD REVERSIBLE DOOR

LIFESTYLE REFRIGERATION





XOU15WGSX

- Field Reversible Door
- Telescoping wire racks fully extend
- Tri-color led lighting
- Secure door lock

15” SS SINGLE ZONE WINE COOLER WITH FIELD REVERSIBLE DOOR

Keep 34 bottles close at hand and ready to serve at 41° to 64° F.

This elegant, efficient wine storage and serving center is the perfect choice for convenient entertaining. At only 15” wide and designed to install flush with your cabinetry, this quiet and efficient wine cooler will prove to be the ideal choice for entertaining or just relaxing.

When it is all about the wine - it is all about XO.


WORLD CLASS SERVICE | COMPREHENSIVE WARRANTIES

OUR LASTING COMMITMENT TO YOU

XOU15WGSX

15” SS SINGLE ZONE WINE COOLER WITH FIELD REVERSIBLE DOOR

*Specify R for right hand hinge - or - L for left hand hinge

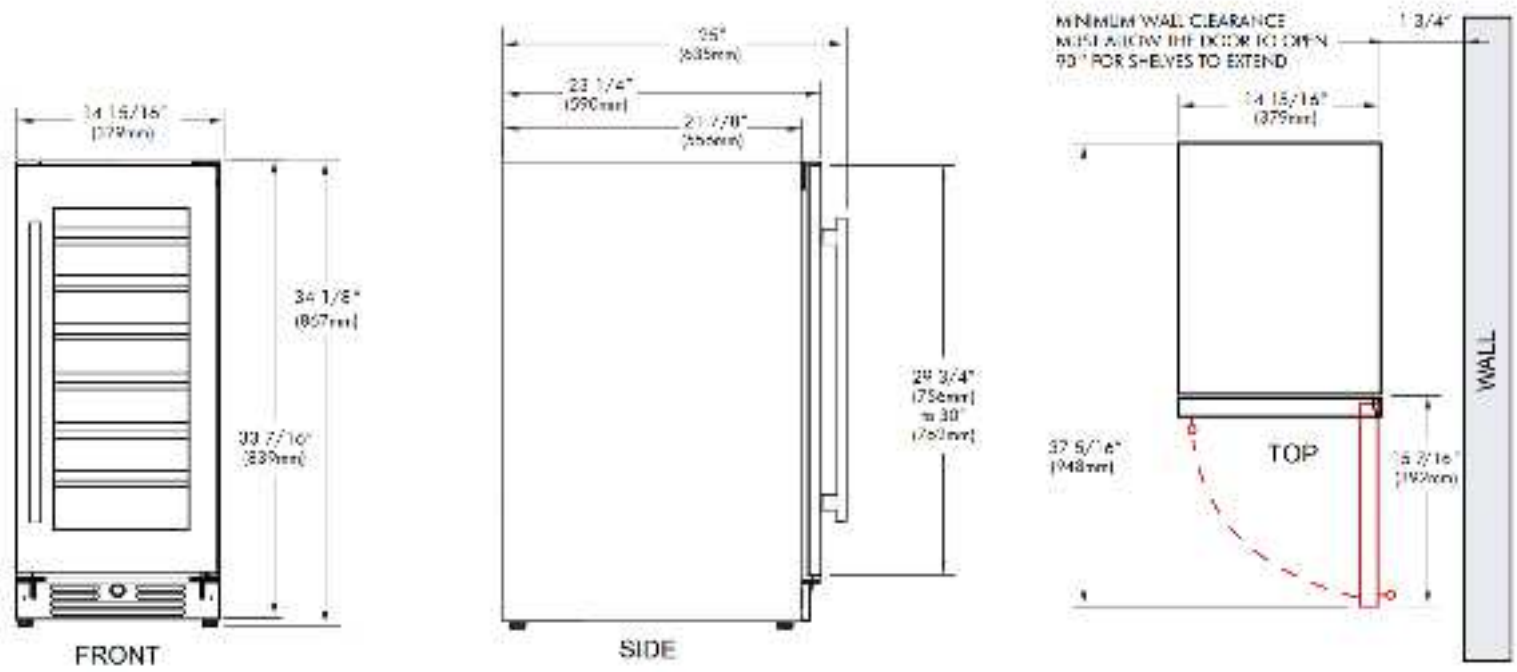

FEATURES

CAPACITY

Extending wire bottle racks hold:
(30) 750ml bottles 41° To 64° F
(4) additional bottles storage at the bottom

FEATURES

- Field Reversible Door
- Telescoping Wire Racks Absorb Vibration
- Tri-Color Led Lighting
- Secure Door Lock
- Flush undercounter Installation Design
- Low-E Glass Blocks Damaging Uv Light
- Intuitive Electronic Controls
- Two Handle Options Included
- X-Active purifies and circulates air
- Quiet Operation 37 Dba
- Designed for residential or commercial settings

Note: zero clearance hinges are visible just above and below the door

SPECIFICATIONS

ELECTRICAL	115V 60HZ 1.2 AMP*
DIMENSIONS	H 34 1/8” W 14 15/16” D 23 1/4”
ROUGH IN	H 34 1/4“ min W 15 3/16” D 24”
REFRIGERANT	R600A



Two Differnt Style Handles Included

ENERGY STAR


the next level in luxury appliances
xoappliance.com | 800.966.8300

XO is exclusively distributed by EASTERN MARKETING CORP.
24 Eisenhower Parkway Roseland, NJ 07068

XOU15WGSX

15” SS SINGLE ZONE WINE COOLER WITH FIELD REVERSIBLE DOOR


ROUGH-IN DIMENSIONS

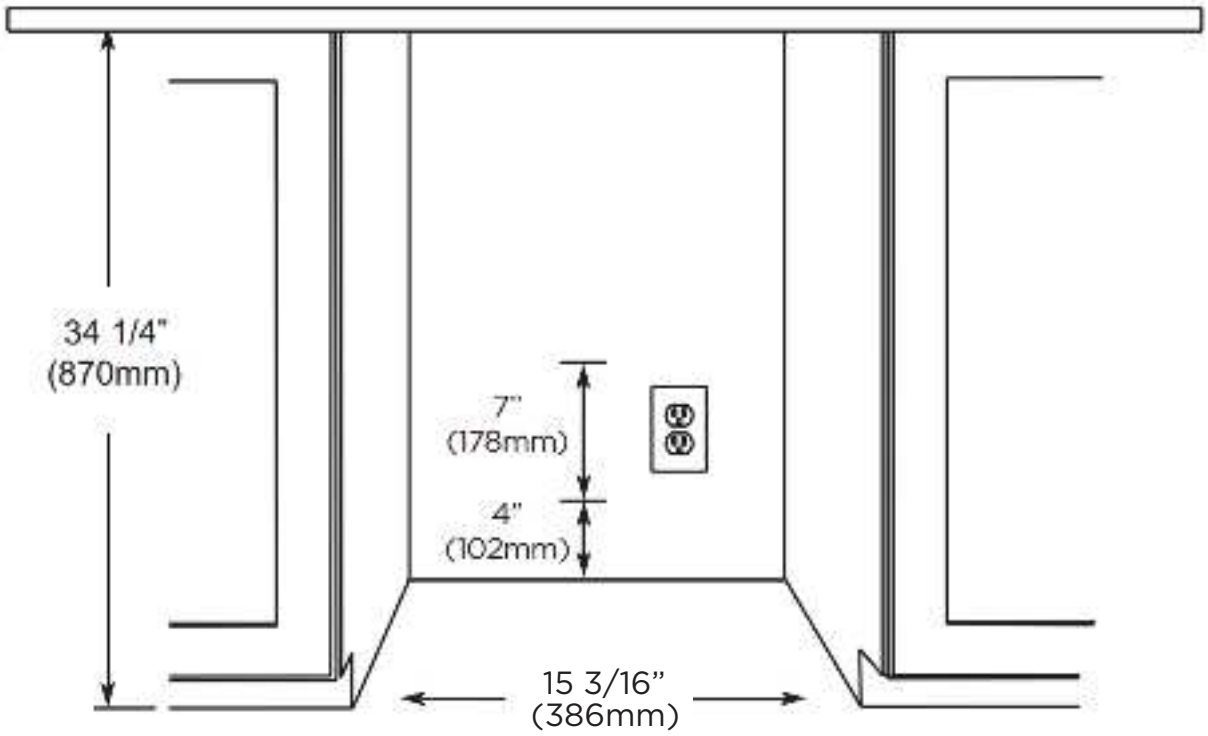


All XO undercounter units arrive pre-wired with low profile plugs for easy installation



Need more space - Cut into an adjoining cabinet to reach an outlet there



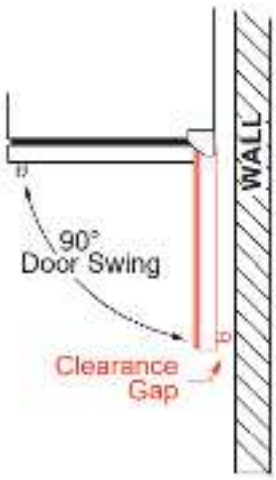

When installing with the hinge side next to a wall -leave 1-3/4” clearance gap for cabinet handles.

Door must be able to open a minimum of 90 .

If the door cannot open fully You cannot extend the shelves.