LG SIGNATURE


SC5GQR8GA

LG SIGNATURE Styler® Smart Steam Closet with Dual TrueSteam® Technology, Dynamic MovingHanger™ and Built-In HandySteamer™

KEY FEATURES

- Dual TrueSteam® Technology
- Built-In HandySteamer™
- QuickRefresh™
- Dynamic MovingHanger™
- Plug & Go Design
- Smart LCD Touch Display





Smart LCD Touch Display


Built-In HandySteamer™


ThinQ App

PRODUCT FEATURES

MATERIAL & FINISH	
Door Color	Mirror
Door Type	Glass
Styler Body Color	Textured Western Black
FEATURES	
Drying Type	Dual Inverter HeatPump™ system
TrueSteam®	Yes (Dual TrueSteam®)
Dynamic MovingHanger™	Yes
Max RPM of Moving Hanger	350
Pants Crease Care	Yes
Space Dehumidification	Yes
Reversible Door	Yes
Aroma Kit	Yes
Versatile Shelf	Yes
End of Cycle Signal	Yes
Interior Light	Yes (3)
Empty Water Indicator	Yes
Fill Water Indicator	Yes
Built-In HandySteamer™	Yes
Auto Fresh System™	Yes
PROGRAMS	
Dry 1 Time	Yes
Refresh	Light / Normal / Heavy / Wet
AI Styling	Yes
Sanitary	Find Dust / Normal / Heavy Duty / Kid's Item
Warm Blankets	Yes
Ready to Go	Yes
Gentle Dry - Dehumidify	Dehumidify, Time Dry, Rain / Snow
Sanitize	Bedding / Pillow, Doll / Suit / School Uniform
Special Care	Suits / Coats, Silk Care, School Uniform, Pants Crease
Styling	Wool / Knitwear, Cashmere, Fur / Leather, Padded Coat, Storage, Sportswear, Scarf, Old Clothes, Yoga Outfit, Silent, Jeans, Knitted Cardigan
Dry	Padded Coat, Low Temperature Dry, Wool / Knitwear Dry, Rainy Season Dry, Swimsuit, AI Dry, Yoga Outfit

CONTROL & DISPLAY	
Display Type	Full Touch LCD + Button & LCD + LED Display
Figure Indicator	LCD
Delay Timer	3-19 Hours
LCD Size	2.4 Inches
ADDITIONAL OPTIONS	
Night Care	Yes
Delay Start	Yes
Control Lock	Yes
SMART FEATURES (THINQ® TECHNOLOGY)	
ThinQ (Wi-Fi)	Yes
Remote Start and Cycle Monitor	Yes
Download Cycle	Yes
Smart Diagnosis	Yes
Energy Monitoring	Yes
Voice Control (3rd Party Device)	No
POWER SOURCE	
Electrical Requirement	120V, 60Hz, 12.5A
Plug	Included
Plug Type	3 Prong
DIMENSIONS/ CLEARANCES/ WEIGHT	
Product Dimensions (WxHxD)	23 5/8" x 77 3/8" x 24 3/8"
Carton Dimensions (WxHxD)	28 1/4" x 80 3/4" x 27 5/8"
Product Depth with door open 90°	46 7/8"
Product Weight (lbs)	207.2
Shipping Weight (lbs)	277.1
OPTIONS & ACCESSORIES	
Regular Hanger (Qty)	5
Pants Hanger (Qty)	No
Shelf (Qty)	1
Anti-Tip Kit (Qty)	No
Rear Leveling Feet	2
Carpet Install Spike	4
UPC CODE	
SC5GQR8GA	195174148228

© 2025 LG Electronics USA, Inc. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp. All other product and brand names are trademarks or registered trademarks of their respective owners. Design, features and specifications are subject to change without notice. Non-metric weights and measurements are approximate. Some features may require Internet access. Content and services may vary by product and are subject to change without notice. 6/4/26

LG SIGNATURE

SC5GQR8GA


LG SIGNATURE Styler

IMPORTANT

QUICK INSTALL & CLEARANCES

For full installation directions/clearances please refer to the corresponding User Manual and Installation Guide.

PRODUCT DIMENSIONS

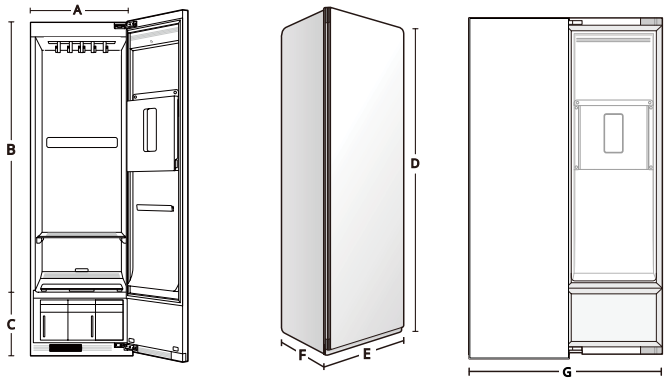


DIMENSIONS (Inch / mm)		
	Inch	mm
A	21	535
B	61 3/4	1570
C	15 1/2	395
D	77 3/8	1965
E	23 5/8	600
F	24 3/8	620
G	46 7/8	1190

INSTALLATION

Before Installing - Installation Overview


Please read the following installation instructions first after purchasing this appliance or transporting it to another location.

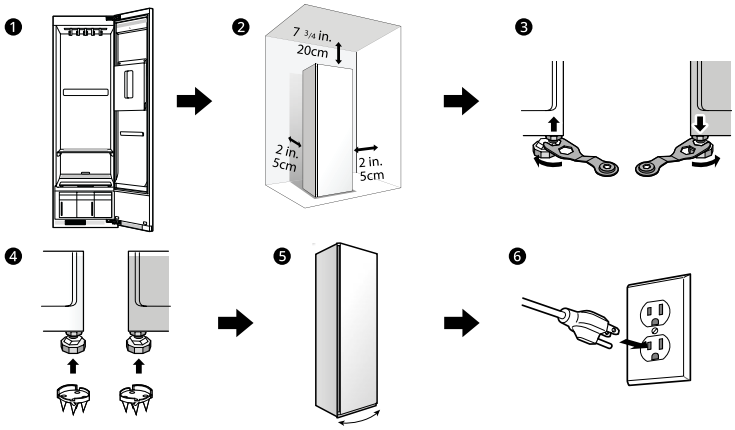


1. Unpack & remove shipping material
2. Check & choose the proper location
3. Level the appliance
4. Install carpet spikes†
5. Reverse the door swing†
6. Connect to grounded outlet

† : If needed.

CLEARANCE




1. Allow at least 24 in. (61 cm) in front to open the door.
2. Allow at least 2 in. (5 cm) on both sides and between the back of the appliance and the wall.
3. Allow at least 7 3/4 in. (20 cm) between the top of the appliance and any overhanging shelves or cabinets.



Installation Spacing for Recessed Area or Closet Installation

There should be at least a little space around the appliance (or any other appliance) to avoid contact with walls, furniture, or other appliances during operation.
Allow a minimum of 1 3/16 in. (3 cm) on all sides of the appliance to avoid increased noise or damage.

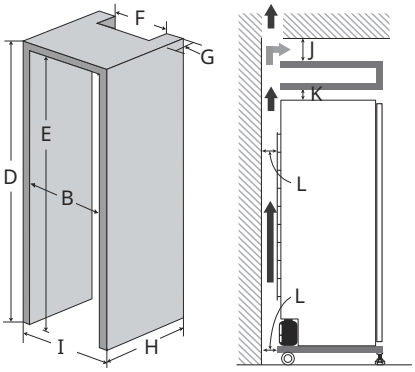


DIMENSIONS (Inch / mm)		
	Inch	mm
A	≥ 27 1/8	≥ 690
B	≥ 26 3/8	≥ 670
C	≥ 10	≥ 250
D	≥ 78 7/8	≥ 2004
E	≥ 78 3/8	≥ 1990
F	≥ 21 13/16	≥ 555
G	≥ 2	≥ 50
H	≥ 27 1/8	≥ 690
I	≥ 27 5/8	≥ 700
J	≥ 2	≥ 50
K	≥ 1	≥ 25
L	≥ 2	≥ 50

• For closet installation, with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.
• Minimum vent opening for built-in installation is 31.5 sq. in. (200 cm2.)

Closet Ventilation Requirement

Closets with doors must have both an upper and lower vent to prevent heat and moisture build-up in the closet.

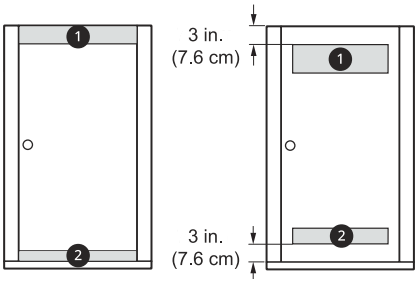

1. Upper vent opening with a minimum opening of 48 sq. in. (310 cm2) must be installed no lower than 6 ft. (185 cm) above the floor.
2. Lower vent opening with a minimum opening of 24 sq. in. (155 cm2) must be installed

© 2025 LG Electronics USA, Inc. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp. All other product and brand names are trademarks or registered trademarks of their respective owners. Design, features and specifications are subject to change without notice. Non-metric weights and measurements are approximate. Some features may require Internet access. Content and services may vary by product and are subject to change without notice. 06/04/2026