

800 Series, Dual Fuel Freestanding Range, 36", Stainless Steel HDS8857UC



- **Industrial-Chic Design**
- **A QuietClose Door that never slams**
- **Ergonomic tilted display:** makes viewing the screen more ergonomic while cooking and is sleek and stylish
- **Support heavy dishes with a Telescopic Rack**
- **Even cooking**


UPC code: 825225975212
Product color: Stainless Steel
Gas type preset:Natural gas 15 mbar (USA)
Total NG BTUs: 23000 Btu
Watts: 3300 W
Fuse protection:20 A
Volts: 240/208 V
Frequency: 60 Hz
Required Cutout Size (HxWxD) (in):36" width slide-in
Overall Appliance Dimensions (HxWxD) (in):36" x 35 15/16" x 24 14/16"
Variable cooker height (in): 1"
Product Packaging Dimensions (HxWxD): 34 1/16" x 38 3/4" x 28"
Net Weight: 297.000 lbs
Gross Weight:341.000 lbs

HEZ9LLUC Range Feet Premium 30/36, SS
HEZ9TK36UC Range Toe Kick 36, SS
HEZ9YZ36UC Range Low Back Guard 36" SS Model
HEZ9ZZ36UC Range Island Trim Ext. 36" SS Models




800 Series, Dual Fuel Freestanding Range, 36", Stainless Steel HDS8857UC

Measurements in inches (mm)

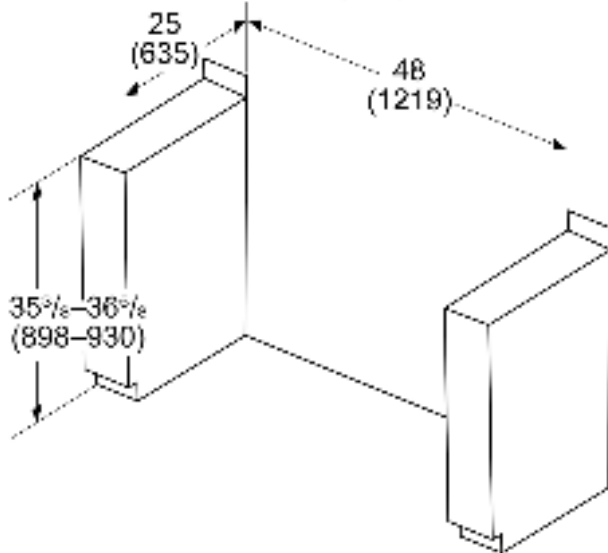

Cabinet clearance requirements



D: Min. 48" (1219 mm)
E: Min. 25" (635 mm)
F: Max. 137" (3503 mm)
G: Min. 48" (1219 mm)
Note: clearance behind cooktop,
overhead cabinets must be 18" (457 mm)
from cooktop surface and a side of the
appliance
H: Min. 30 3/8" (780 mm)
I: Max. 117" (2975 mm)
J: Max. 47 1/2" (1206 mm)
K: Max. 47 1/2" (1206 mm)
L: Max. 117" (2975 mm)

The distance L must be no less than
when installing the range-dual fuel

B: Min. 18" (457 mm)
C: Min. 20" (508 mm) clearance between
the top of the cooking surface and the
bottom of the overhead hood or a
non-combustible wall or panel

Min. 20" (508 mm) clearance between
the top of the cooking surface and the
bottom of a combustible wall or panel

A: Gas vent outlet
N: Gas supply line

From cooking surface to side maximum
clearance is required from 18" (457 mm)
to support wall or combustible wall or
panel or cabinet