

800 Series, 36", Stainless Steel HIS8857UC



- **Industrial-Chic Design**
- **Faster cooking with induction**
- **Easy to clean glass surface**
- **Combi Zone™**
- **Ergonomic tilted display:** makes viewing the screen more ergonomic while cooking and is sleek and stylish


UPC code: 825225975397
 Product color: Stainless Steel
 Watts: 15400 W
 Fuse protection: 50 A
 Volts: 240/208 V
 Frequency: 60 Hz
 Required Cutout Size (HxWxD) (in): 36" width slide-in
 Overall Appliance Dimensions (HxWxD) (in): 36" x 35 15/16" x 24 14/16"
 Variable cooker height (in): 1"
 Product Packaging Dimensions (HxWxD): 34 1/16" x 38 3/4" x 28"
 Net Weight: 295.000 lbs
 Gross Weight: 334.000 lbs

HEZ9LLUC Range Feet Premium 30/36, SS
 HEZ9TK36UC Range Toe Kick 36, SS




800 Series, 36", Stainless Steel HIS8857UC

Measurements in inches (mm)

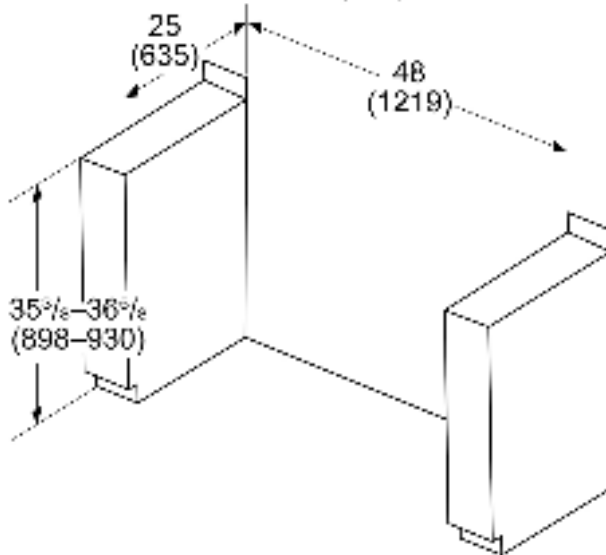

Cabinet clearance requirements



D: Min. 50" (1270 mm)
 E: Min. 25" (635 mm)
 F: Max. 13" (330 mm)
 G: Min. 40" (1016 mm)
 *Clearance must be based on adjacent overhead cabinet or on the finished surface and width of the appliance.

H: 17" (432 mm) (800–810 mm)
 I: Max. 117" (2967 mm)
 J: Max. 75" (1905 mm)

The distance H must be no less than when installing the range hood fan.

A: 36" (914 mm)

A: Min. 37" (940 mm)
 B: Min. 40" (1016 mm)
 C: Min. 30" (762 mm) (must be below the bottom of the overhead cabinet or a non-combustible wall)

From ceiling surface to side removable hood must be no less than 18" (457 mm) to prevent contact with ceiling while working.

Mounting bracket in inches (mm)

