

30" PRO-STYLE® RANGETOP JGCP430WP - 29¾" x 14½" x 28¾"


PRODUCT DIMENSIONS

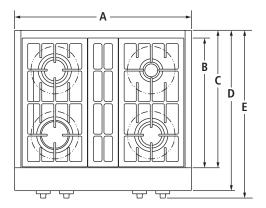


TOP VIEW



FRONT VIEW




BACK VIEW

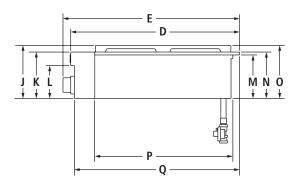

SIDE VIEW


MOI	DEL#	JGCP430WP	
		in	cm
Α	Overall width	29¾	75.6
В	Depth of grates	213/4	55.2
С	Depth without control panel	231/4	59.0
D	Depth with control panel overhang	271/8	68.9
Е	Depth with knobs	283//8	72.0
F	Width of grates	27	68.6
G	Center of rangetop to center of gas inlet	11	28.1
Н	Height from gas inlet to cooking surface	145/8	37.1
ı	Width of recessed rangetop	291/8	73.9
J	Height including grates	81/2	21.7
K	Height of control panel	71/2	19.0
L	Height to bullnose	53/8	13.5
M	Height of recessed rangetop	7	17.7
N	Height to cooking surface	73/8	18.8
0	Height of recessed rangetop with grates	81/2	21.6
Р	Depth of recessed rangetop	221/8	56.3
Q	Depth with control panel	26½	67.3






30" PRO-STYLE® RANGETOP JGCP430WP - 29¾" x 14½" x 28½"

OPENING/CLEARANCE DIMENSIONS

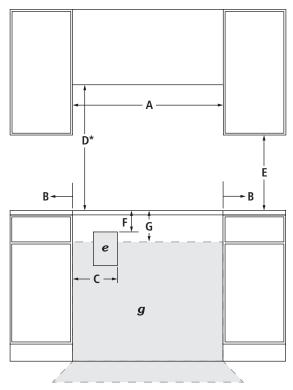

FRONT VIEW

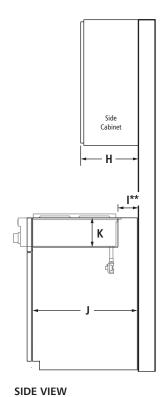

MOD	DEL #	JGCP430WP	
		in	cm
Α	Width of combustible area above cooking surface (min.)	30	76.2
В	Width from rangetop to fixed wall or other combustible material (min.)	6	15.2
С	Width to inner edge of outlet (max.)	16	40.6
D*	Height to bottom of uncovered wood or metal cabinet above cooking surface (min.)	30	76.2
E	Height to bottom of uncovered wood or metal cabinet (min.)	18	45.7
F	Height to top edge of outlet (min.)	10	25.4
G	Height to gas supply line area	14	35.6
Н	Depth of upper cabinet (recommended)	13	33.0
 **	Depth from cutout to wall	13/4	4.4
J	Depth of cabinet	24	61.0
K	Height from cabinet to countertop	71/4	18.4
L	Width of cutout (countertop and cabinet)	291/4	74.3
M	Width of gas opening	121/2	31.7
N	Width from cutout to gas opening	2	5.1
0	Width of notch	3/8	1.0
U	Zero clearance	5/16	0.8
Р	Width of cutout (countertop only)	30	76.2
г	Zero clearance	297/8	75.9
Q	Depth of gas opening	67/8	17.5
R	Depth from cutout to gas opening	3/4	1.9
S	Depth of cutout (countertop and cabinet)	221/4	56.5
e	Recommended electrical outlet location		
g	Recommended gas supply line location		

^{*}Dimension can be reduced by 6" (15.2 cm) when bottom of wood or metal cabinet is covered by not less than ½" (0.6 cm) flame retardant millboard covered with not less than No. 28 MSG sheet metal, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper. If installing a hood above the rangetop, follow the hood instructions for

If installing a hood above the rangetop, follow the hood instructions for dimensional clearances above the cooking surface.

GAS REQUIREMENTS

Natural Gas


This rangetop is factory-set for use with natural gas.

LP Gas Conversion

Conversion must be done by a qualified service technician. To convert to LP gas, use the LP gas conversion kit provided with the rangetop.

ELECTRICAL REQUIREMENTS

120 volt, 60 Hz, AC only, 15-amp fused, electrical circuit is required. A time-delay fuse or dedicated circuit is recommended.



TOP VIEW – CUTOUT

(solid platform not shown)

IMPORTANT: Dimensional specifications are provided for planning purposes only. **Do not make any cutouts based on this information.** Refer to the Installation Guide *before* selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.



^{**}If back wall is constructed of a combustible material and a backsplash is not installed, a 13/4" (4.4 cm) minimum clearance is required.