


FISHER & PAYKEL

DATA SHEET
30" Contemporary Freestanding Induction Range and Electric Range


Model no:
OR30SDI6X1, OR30SDE6X1
(refer page 5 for metric measurements)

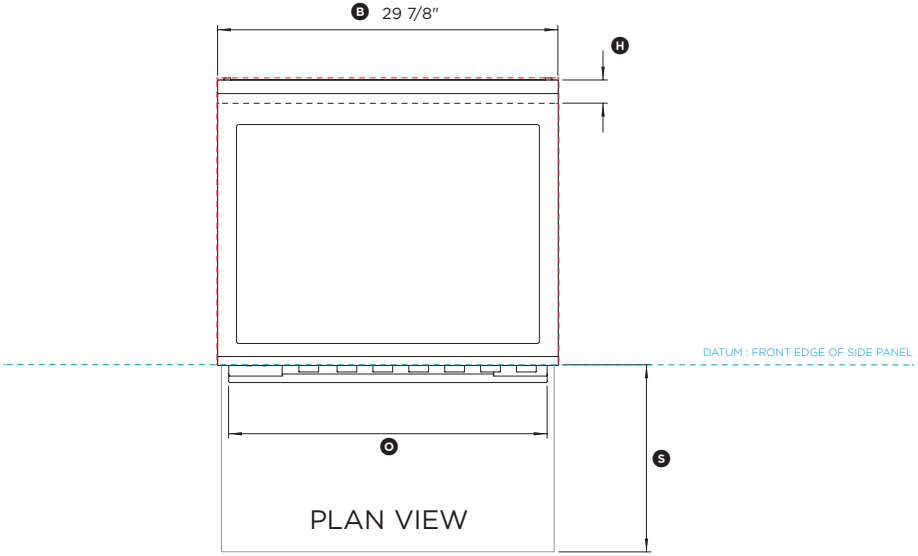

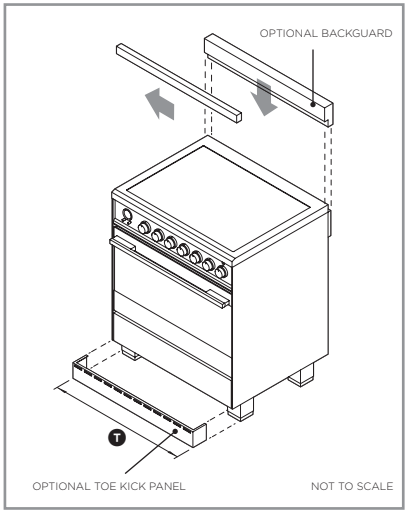


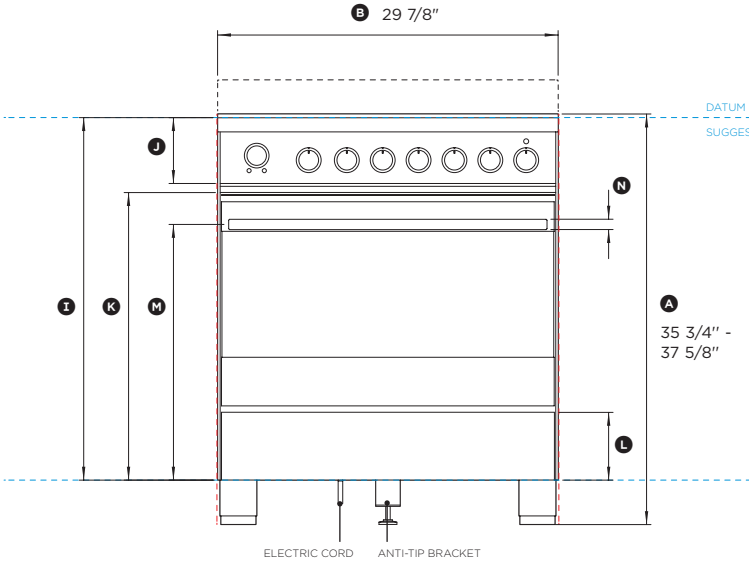

FRONT VIEW

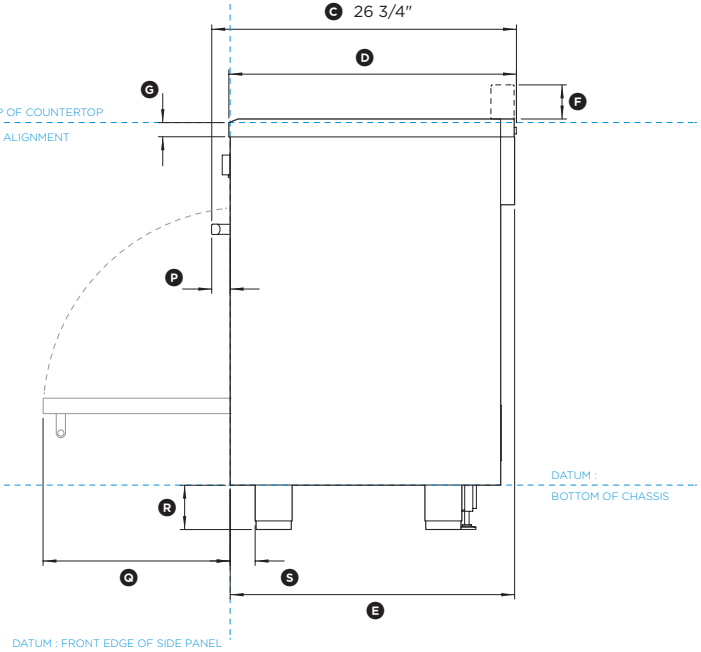

PROFILE VIEW



Product Dimensions	**in**
Ⓐ Overall height of range (from floor to cooktop, excluding trim)	min 35 3/4" max 37 5/8'
Ⓑ Overall width of range	29 7/8"
Ⓒ Overall depth of range including handle and dials	26 3/4"
Ⓓ Depth from front of range to rear (excl. handle and dials)	25 1/4"
Ⓔ Depth from rear of chassis to front of side panel	24 15/16"
Ⓕ Height from top of cooktop to top of optional backguard	3"
Ⓖ Height of cooktop front face (excl. chamfer)	1 1/4"
Ⓗ Depth of rear trim / optional backguard	2"
Ⓘ Height from countertop to bottom of chassis	31 13/16"
Ⓙ Height from countertop to bottom of control panel	5 3/4"
Ⓚ Height from top of door to bottom of chassis	25 1/4"
Ⓛ Height from top of warmer drawer to bottom of chassis	5 15/16"
Ⓜ Height from handle to bottom of chassis	22 7/16"
Ⓝ Thickness of handle rail	15/16"
Ⓞ Width of handle (including standoffs)	27 15/16"
Ⓟ Depth of handle (measured from front of door)	1 5/8"
Ⓠ Depth of open door to front of side panel	16 7/16"
Ⓡ Adjustable feet height	min 3 5/8" max 5 1/2"
Ⓢ Toekick depth - with optional toe kick panel - without toe kick panel	2 1/16" 2 3/16"
Ⓣ Width of optional toe kick panel	29 13/16"


Cavity Dimensions	**in**
Overall width of cavity	min 30"
Overall depth of cavity	25 1/4"
Overall height of cavity	min 35 3/4" max 37 5/8"

IMPORTANT NOTE: For full installation and clearance details please refer to our installation manual.


INDICATES CAVITY CLEARANCES ----------
INDICATES PRODUCT DATUM ----------

DATE: **20.6.2024**

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

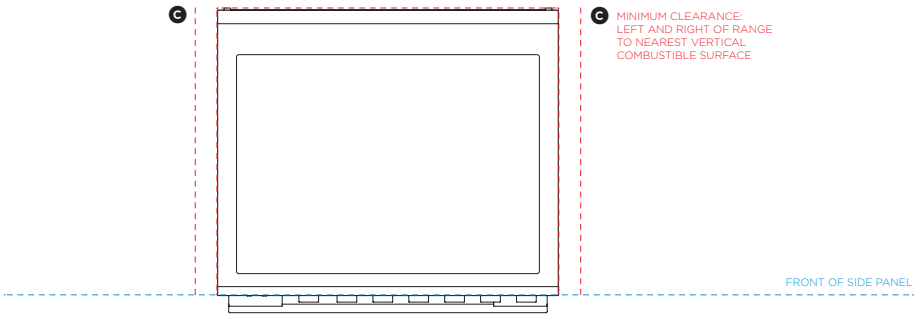

PLAN VIEW

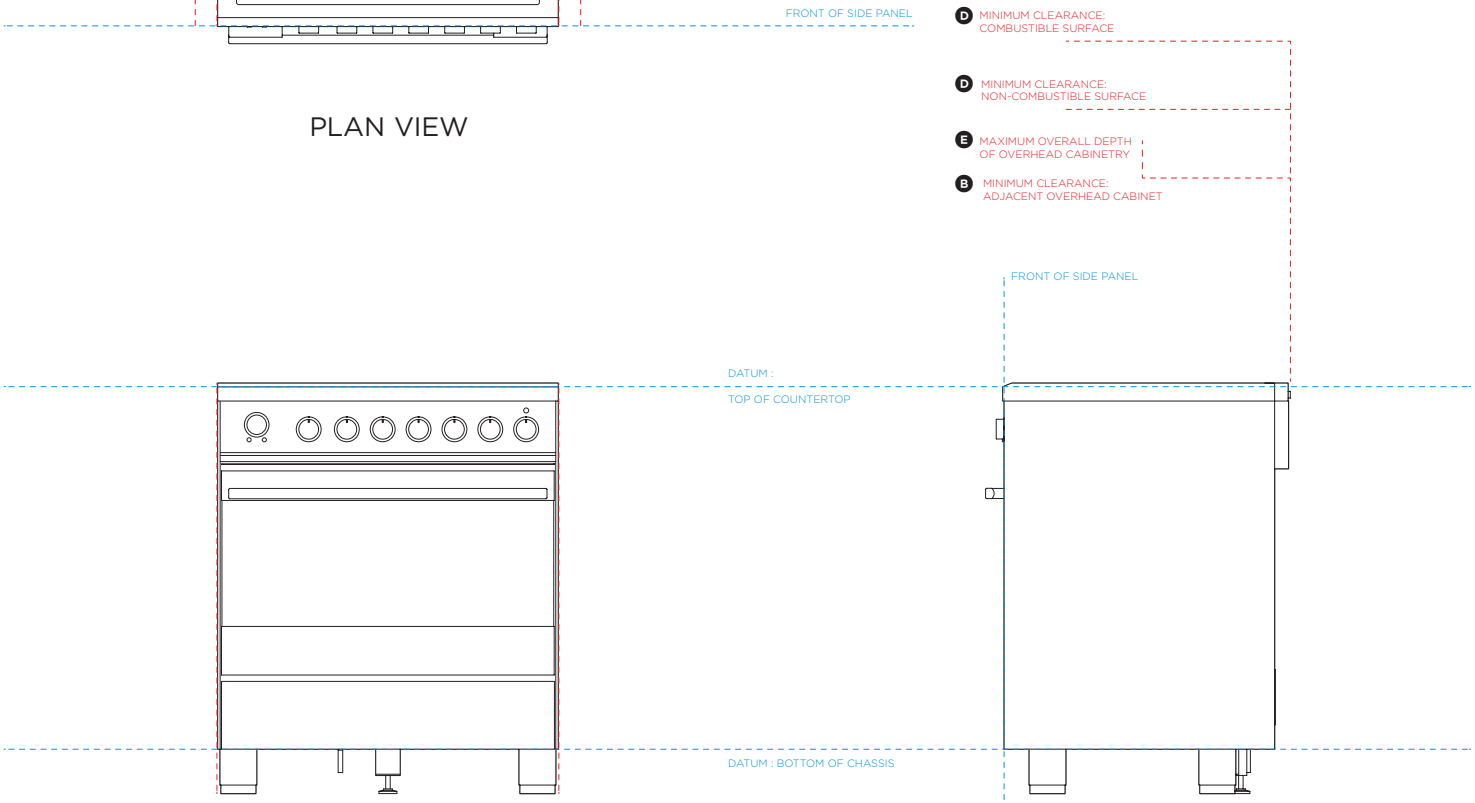

FRONT VIEW

PROFILE VIEW

0 5 10 20 inches

FISHER & PAYKEL

DATA SHEET
30″ Contemporary Freestanding Induction Range and Electric Range

Model no:
OR30SDI6X1, OR30SDE6X1
(refer page 6 for metric measurements)


Clearance Dimensions	**in**
Ⓐ Minimum width of ventilation hood installed above range - not shown*	30″
Ⓑ Minimum vertical distance between countertop and cabinet extending above counter	18″
Ⓒ Minimum clearance from left and right of range to nearest vertical combustible surface	2″
Ⓓ Minimum clearance from cooking surface to:	
- overhead cabinet centered above the cooktop (combustible / unprotected)	30″
- overhead cabinet centered above the cooktop (non-combustible / protected)	24″
- ventilation hood centered above the cooktop	24″
Ⓔ Maximum overall depth of overhead cabinetry	13″


*IMPORTANT NOTE: For full installation and clearance details please refer to our installation manual.

INDICATES CLEARANCES ----------
INDICATES PRODUCT DATUM ----------

DATE: **20.6.2024**

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16″). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

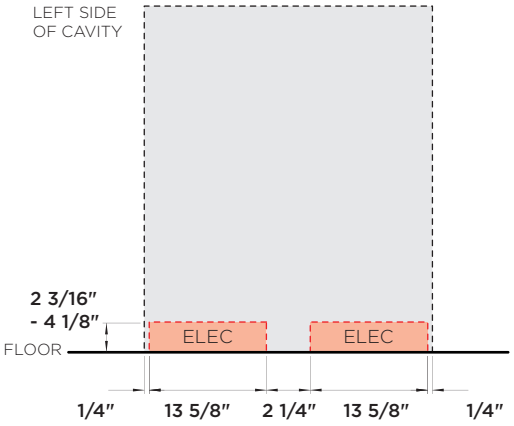

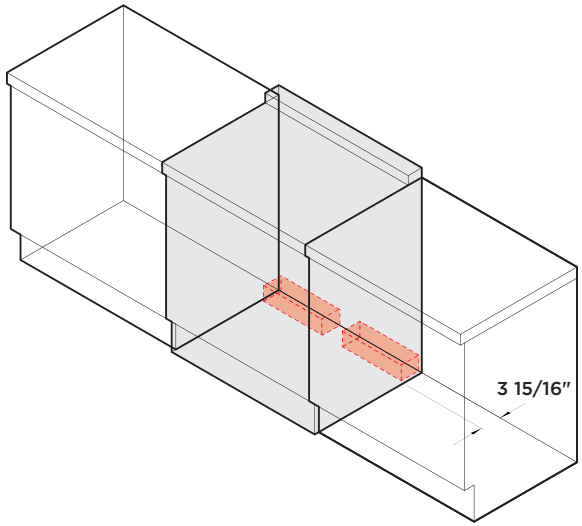

FISHER & PAYKEL

DATA SHEET
30" Contemporary Freestanding Induction Range


Model no:
OR30SDI6X1
(refer page 7 for metric measurements)


Specifications	
Oven Total Capacity	3.5 cu.ft
Electrical	
Supply	120/208 V or 120/240 V, 60 Hz
Service	40 A
Connection	4-prong grounding type [NEMA 14-50P plug]
Weight	240lbs

*IMPORTANT NOTE: For full installation and clearance details please refer to our installation manual.

DATE: **20.6.2024**

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

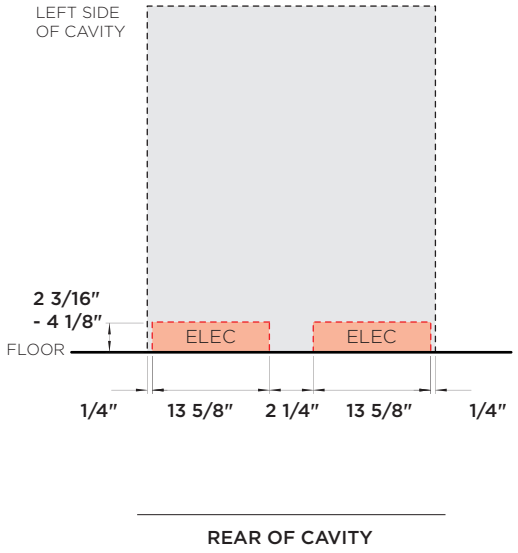

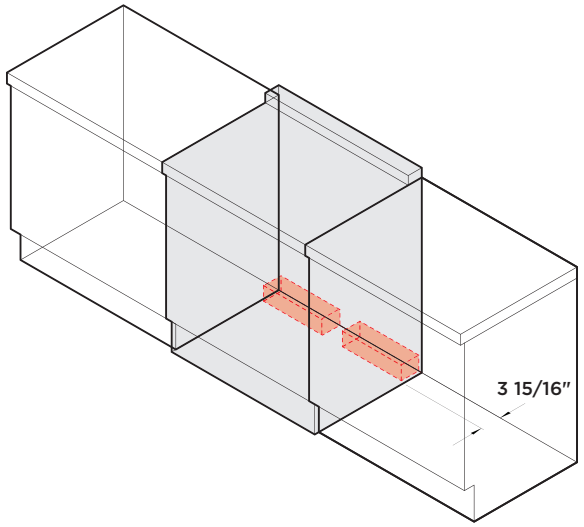

FISHER & PAYKEL

DATA SHEET
30" Contemporary Freestanding Electric Range

Model no:
OR30SDE6X1
(refer page 8 for metric measurements)

Specifications	
Oven Total Capacity	3.5 cu.ft
Electrical	
Supply	120/208 V or 120/240 V, 60 Hz
Service	50 A
Connection	4-prong grounding type [NEMA 14-50P plug]
Weight	240lbs

*IMPORTANT NOTE: For full installation and clearance details please refer to our installation manual.


DATE: **20.6.2024**


IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com


FISHER & PAYKEL


DATA SHEET
30" Contemporary Freestanding Induction Range and Electric Range

Model no:
OR30SDI6X1, OR30SDE6X1
(refer page 1 for imperial measurements)

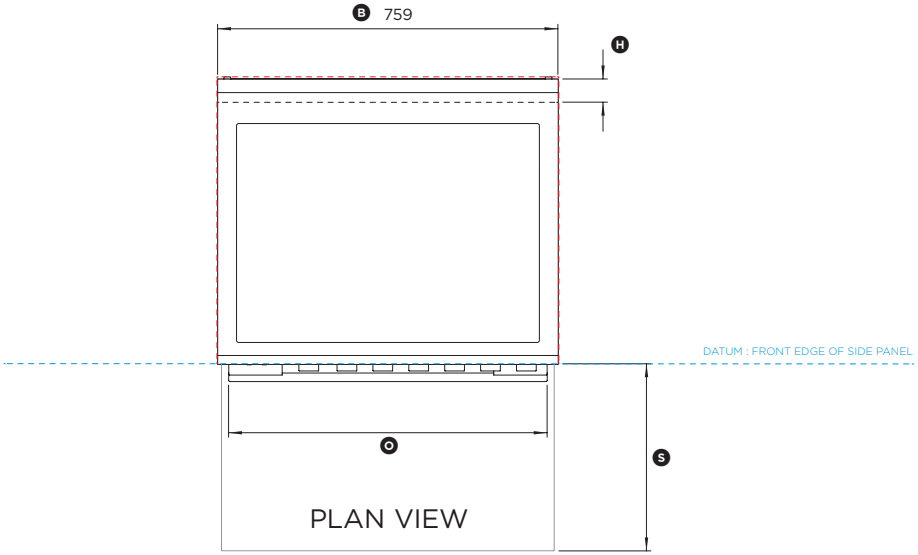

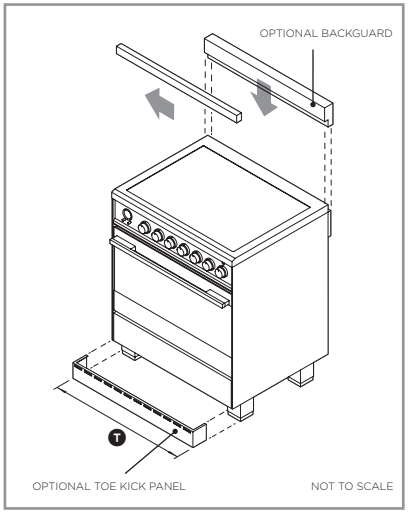

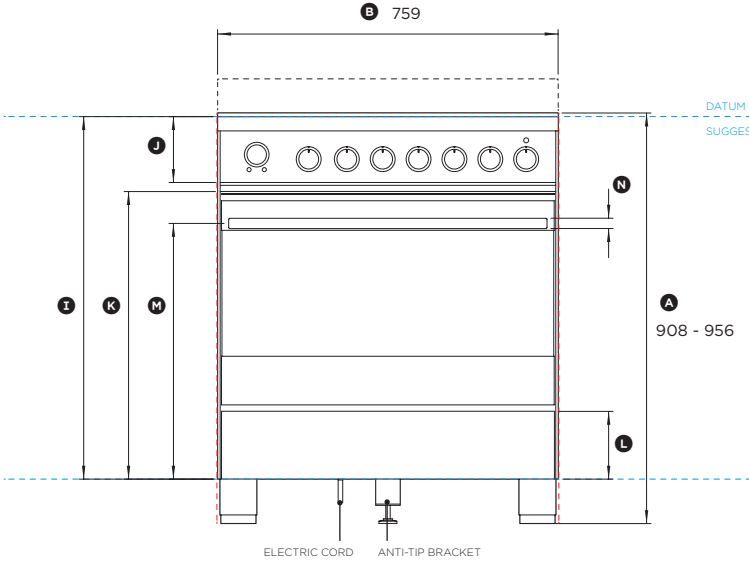

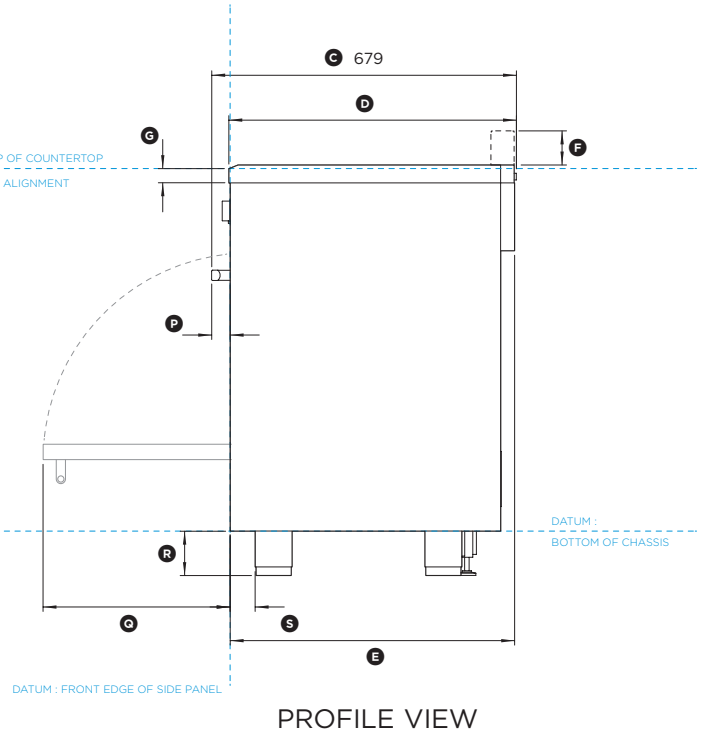

0 100 200 400 millimetres

Product Dimensions	**mm**
Ⓐ Overall height of range (from floor to cooktop, excluding trim)	min 908 max 956
Ⓑ Overall width of range	759
Ⓒ Overall depth of range including handle and dials	679
Ⓓ Depth from front of range to rear (excl. handle and dials)	641
Ⓔ Depth from rear of chassis to front of side panel	638
Ⓕ Height from top of cooktop to top of optional backguard	76
Ⓖ Height of cooktop front face (excl. chamfer)	32
Ⓗ Depth of rear trim / optional backguard	51
Ⓘ Height from countertop to bottom of chassis	808
Ⓙ Height from countertop to bottom of control panel	147
Ⓚ Height from top of door to bottom of chassis	641
Ⓛ Height from top of warmer drawer to bottom of chassis	151
Ⓜ Height from handle to bottom of chassis	570
Ⓝ Thickness of handle rail	23
Ⓞ Width of handle (including standoffs)	710
Ⓟ Depth of handle (measured from front of door)	41
Ⓠ Depth of open door to front of side panel	417
Ⓡ Adjustable feet height	min 92 max 140
Ⓢ Toekick depth - with optional toe kick panel - without toe kick panel	52 56
Ⓣ Width of optional toe kick panel	757

Cavity Dimensions	**mm**
Overall width of cavity	min 762
Overall depth of cavity	641
Overall height of cavity	min 908 max 956

IMPORTANT NOTE: For full installation and clearance details please refer to our installation manual.

INDICATES CAVITY CLEARANCES ----------
INDICATES PRODUCT DATUM ----------

DATE: **20.6.2024**

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com


FISHER & PAYKEL

DATA SHEET
30" Contemporary Freestanding Induction Range and Electric Range


Model no:
OR30SDI6X1, OR30SDE6X1
(refer page 2 for imperial measurements)

Clearance Dimensions	mm
Ⓐ Minimum width of ventilation hood installed above range - not shown*	762
Ⓑ Minimum vertical distance between countertop and cabinet extending above counter	457
Ⓒ Minimum clearance from left and right of range to nearest vertical combustible surface	50
Ⓓ Minimum clearance from cooking surface to:	
- overhead cabinet centred above the cooktop (combustible / unprotected)	762
- overhead cabinet centred above the cooktop (non-combustible / protected)	610
- ventilation hood centred above the cooktop	610
Ⓔ Maximum overall depth of overhead cabinetry	330

*IMPORTANT NOTE: For full installation and clearance details please refer to our installation manual.

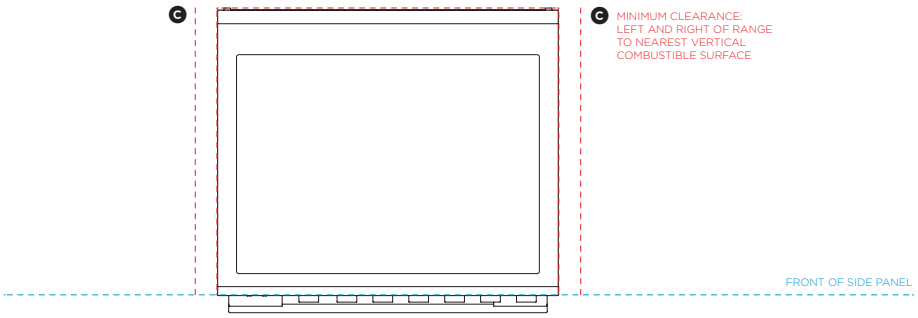

PLAN VIEW

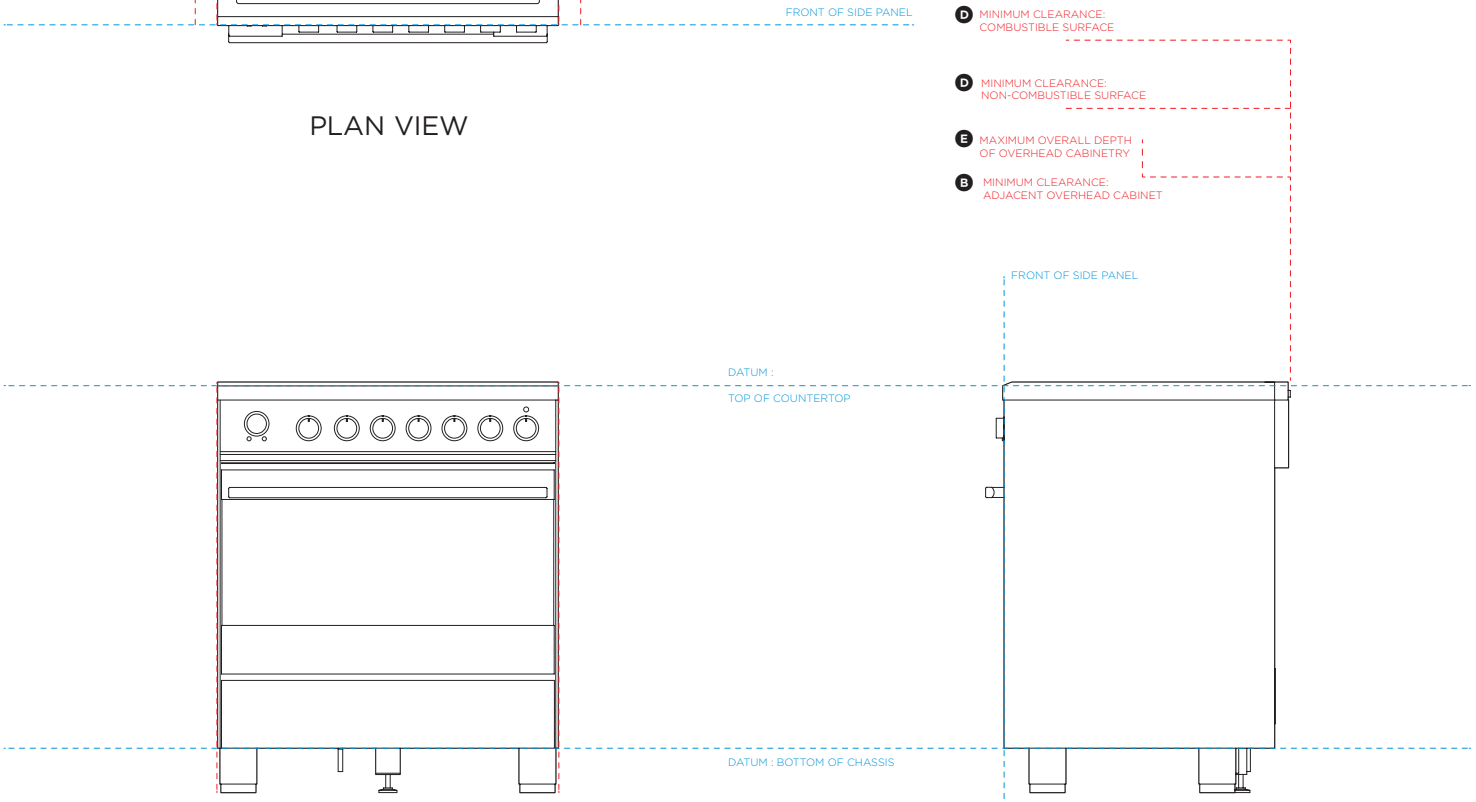

FRONT VIEW


PROFILE VIEW

0 100 200 400
millimetres


INDICATES CLEARANCES ----------
INDICATES PRODUCT DATUM ----------

DATE: **20.6.2024**

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

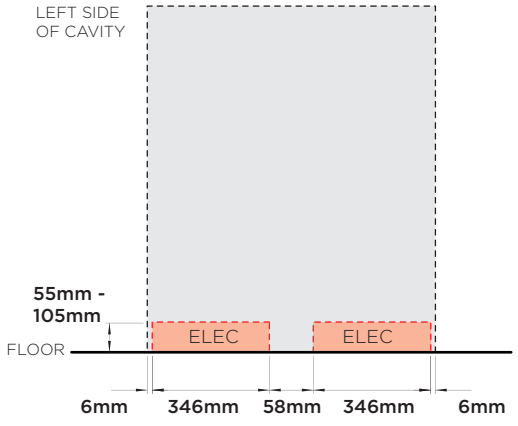

REAR OF CAVITY

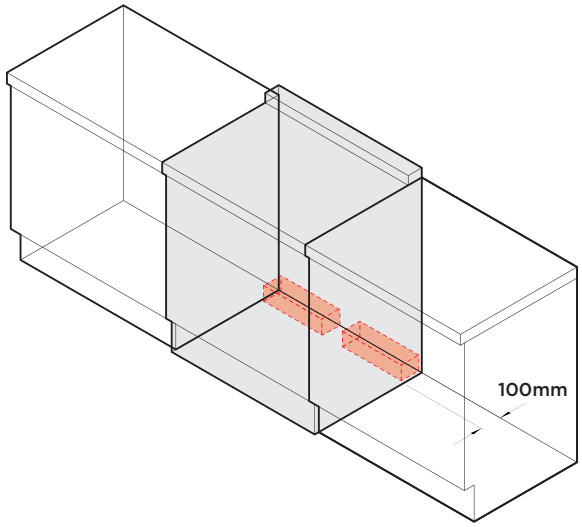

FISHER & PAYKEL

DATA SHEET
30" Contemporary Freestanding Induction Range


Model no:
OR30SDI6X1
(refer page 3 for imperial measurements)

Specifications	
Oven Total Capacity	100L
Electrical	
Supply	120/208 V or 120/240 V, 60 Hz
Service	40 A
Connection	4-prong grounding type [NEMA 14-50P plug]
Weight	109kgs


*IMPORTANT NOTE: For full installation and clearance details please refer to our installation manual.

DATE: **20.6.2024**

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

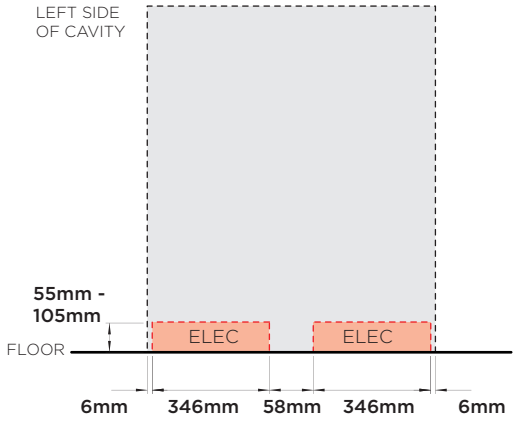

REAR OF CAVITY

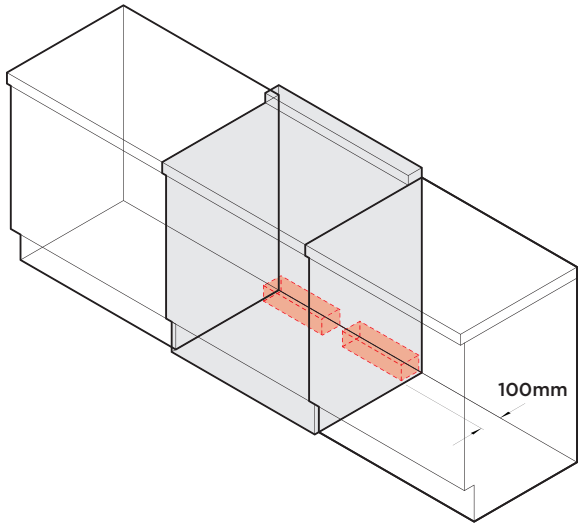

FISHER & PAYKEL

DATA SHEET
30" Contemporary Freestanding Electric Range

Model no:
OR30SDE6X1
(refer page 4 for imperial measurements)

Specifications	
Oven Total Capacity	100L
Electrical	
Supply	120/208 V or 120/240 V, 60 Hz
Service	50 A
Connection	4-prong grounding type [NEMA 14-50P plug]
Weight	109kgs

*IMPORTANT NOTE: For full installation and clearance details please refer to our installation manual.

DATE: **20.6.2024**

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com