


FISHER & PAYKEL

DATA SHEET
30" Classic Freestanding Range Dual Fuel

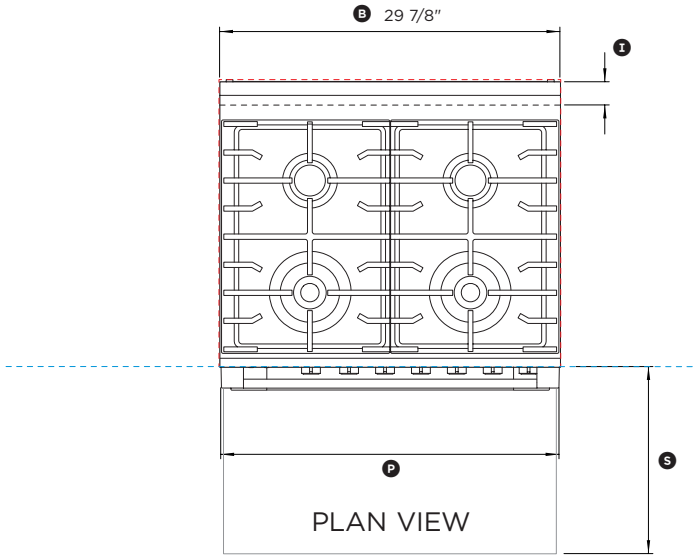


PLAN VIEW

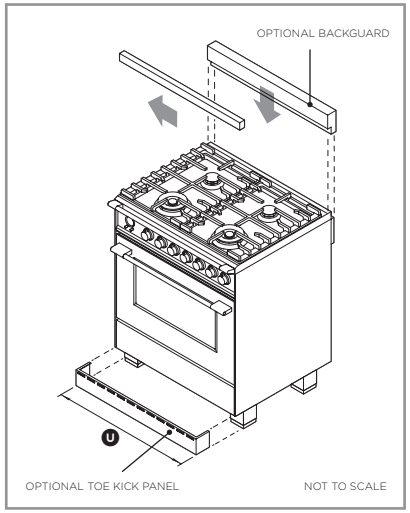

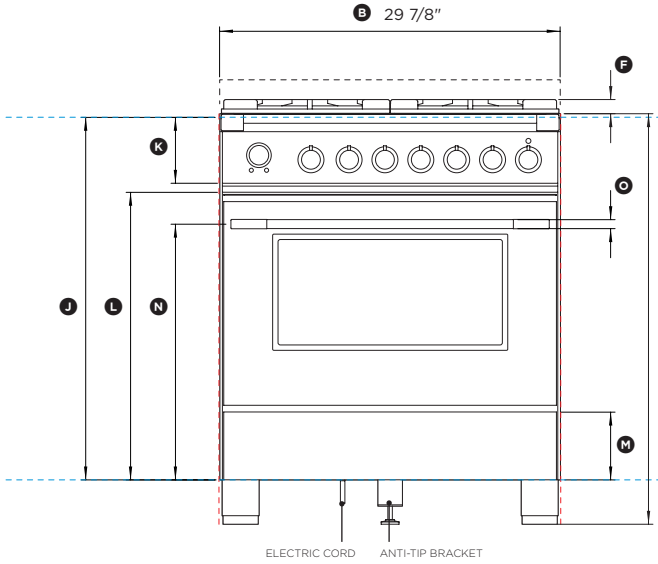

FRONT VIEW

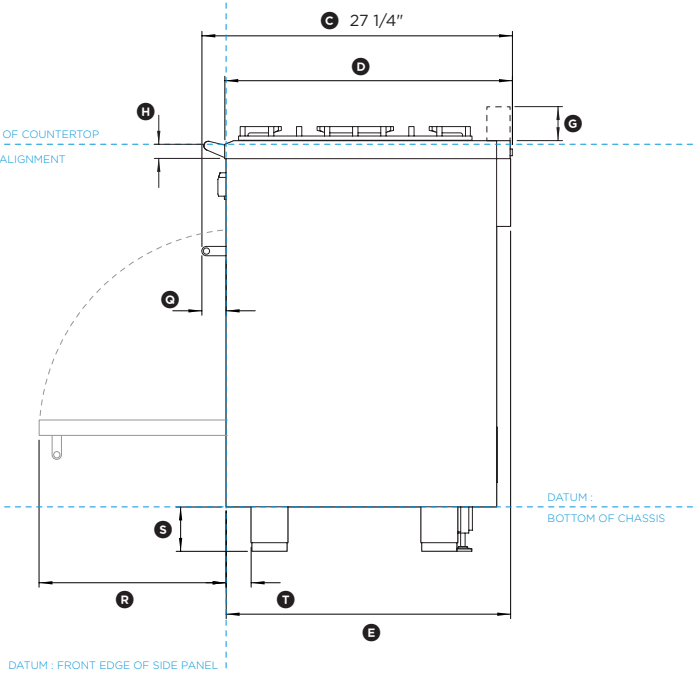

PROFILE VIEW

0 5 10 20 inches

Model no:
OR30SCG6X1, OR30SCG6B1, OR30SCG6W1, OR30SCG6R1
(refer page 4 for metric measurements)

Product Dimensions	**in**
Ⓐ Overall height of range (from floor to cooktop, excluding pan supports)	min 35 3/4" max 37 5/8'
Ⓑ Overall width of range	29 7/8"
Ⓒ Overall depth of range including handle and dials	27 1/4"
Ⓓ Depth from front of range to rear (excl. handle and dials)	25 1/4"
Ⓔ Depth from rear of chassis to front of side panel	24 15/16"
Ⓕ Height from top of cooktop to top of pan supports	1 1/4"
Ⓖ Height from top of cooktop to top of optional backguard	3"
Ⓗ Height of cooktop front face (excl. chamfer)	1 1/4"
Ⓘ Depth of rear trim / optional backguard	2"
Ⓙ Height from countertop to bottom of chassis	31 13/16"
Ⓚ Height from countertop to bottom of control panel	5 3/4"
Ⓛ Height from top of door to bottom of chassis	25 1/4"
Ⓜ Height from top of warmer drawer to bottom of chassis	5 15/16"
Ⓝ Height from handle to bottom of chassis	22 7/16"
Ⓞ Thickness of handle rail (not including standoffs)	13/16"
Ⓟ Width of handle (including standoffs)	29 11/16"
Ⓠ Depth of handle (measured from front of door)	2 1/8"
Ⓡ Depth of open door to front of side panel	16 7/16"
Ⓢ Adjustable feet height	min 3 5/8" max 5 1/2"
Ⓣ Toekick depth - with optional toe kick panel - without toe kick panel	2 1/16" 2 3/16"
Ⓥ Width of optional toe kick panel	29 13/16"

Cavity Dimensions	**in**
Overall width of cavity	min 30"
Overall depth of cavity	25 1/4"
Overall height of cavity	min 35 3/4" max 37 5/8"

IMPORTANT NOTE: For full installation and clearance details please refer to our installation manual.


INDICATES CAVITY CLEARANCES ----------
INDICATES PRODUCT DATUM ----------

DATE: **20.6.2024**

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

FISHER & PAYKEL

DATA SHEET
30″ Classic Freestanding Range Dual Fuel

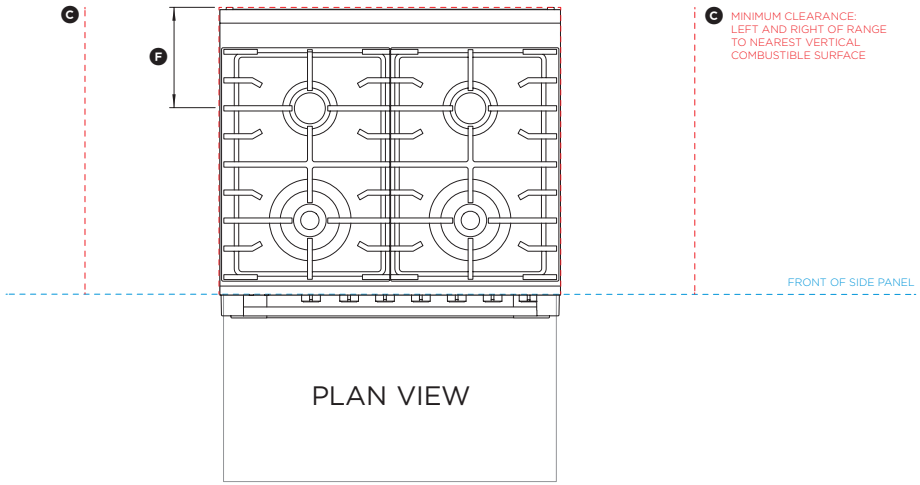



Model no:

OR30SCG6X1, OR30SCG6B1, OR30SCG6W1, OR30SCG6R1

(refer page 5 for metric measurements)


Clearance Dimensions	**in**
Ⓐ Minimum width of ventilation hood installed above range - not shown*	30″
Ⓑ Minimum vertical distance between countertop and cabinet extending above counter	18″
Ⓒ Minimum clearance from left and right of range to nearest vertical combustible surface	11 13/16″
Ⓓ Minimum clearance from cooking surface to: - overhead cabinet centered above the cooktop (combustible / unprotected) - overhead cabinet centered above the cooktop (non-combustible / protected) - ventilation hood centered above the cooktop	 36″ 30″ 30″
Ⓔ Maximum overall depth of overhead cabinetry	13″
Ⓕ Distance from center of rear burner to rear of product	8 7/8″


*IMPORTANT NOTE: For full installation and clearance details please refer to our installation manual.

INDICATES CLEARANCES ----------
INDICATES PRODUCT DATUM ----------

DATE: **20.6.2024**

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16″). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

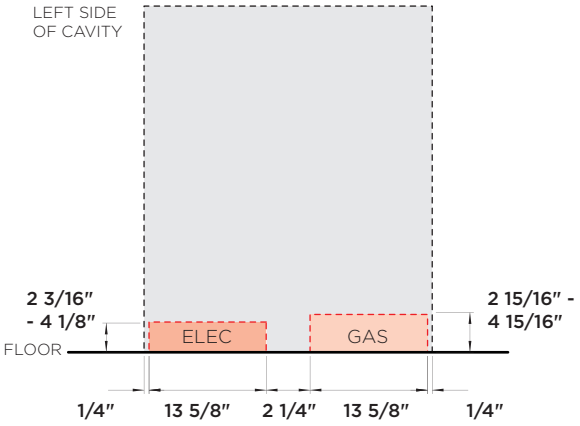

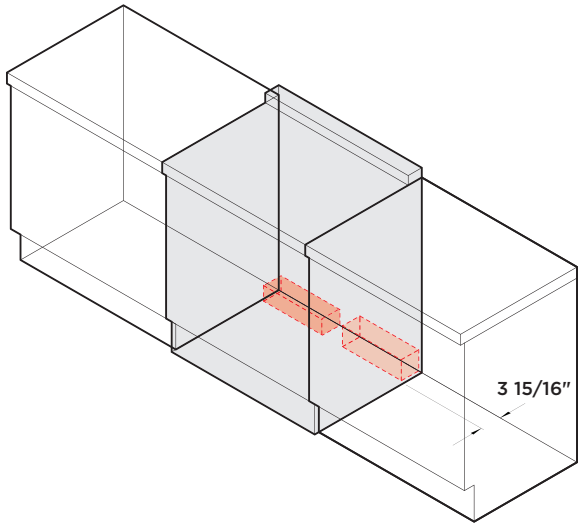

FISHER & PAYKEL

DATA SHEET
30" Classic Freestanding Range Dual Fuel

Model no:
OR30SCG6X1, OR30SCG6B1, OR30SCG6W1, OR30SCG6R1
(refer page 6 for metric measurements)

Specifications	
Oven Total Capacity	3.5 cu.ft
Electrical	
Supply	240-208/120 V, 60 Hz
Service	40 A
Connection	4-prong grounding type [NEMA 14-50P plug]
Gas	
Type	Natural Gas 4" W.C.P. / LP Propane 11" W.C.P.
Connection	1/2" NPT Minimum 5/8" dia. flex line
Weight	240lbs


*IMPORTANT NOTE: For full installation and clearance details please refer to our installation manual.


DATE: **20.6.2024**


IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com


FISHER & PAYKEL

DATA SHEET
30" Classic Freestanding Range Dual Fuel

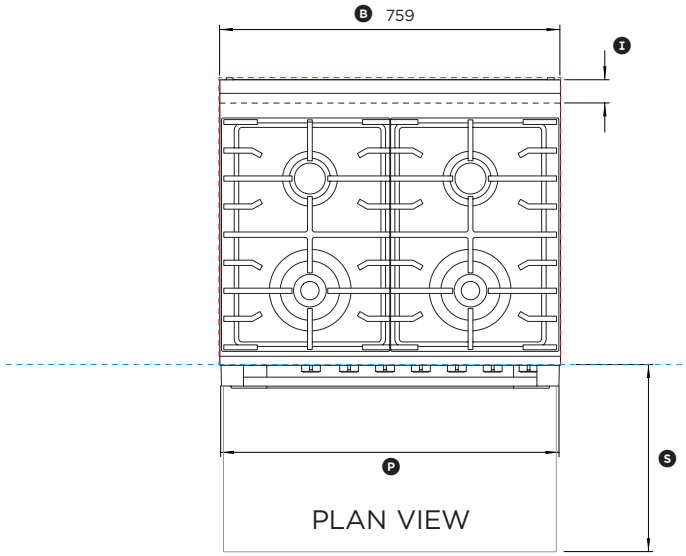

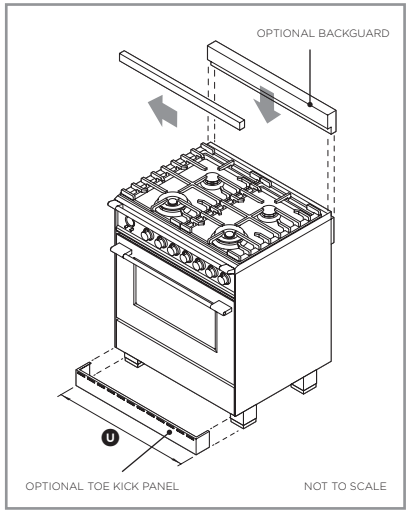

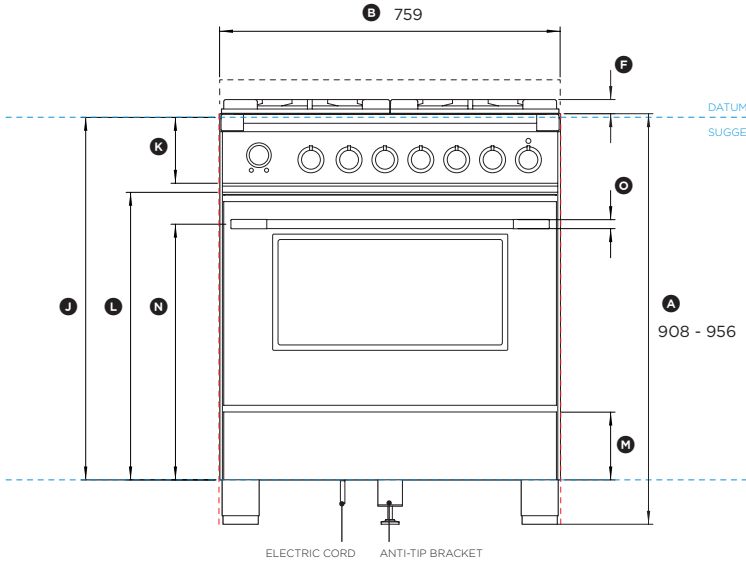

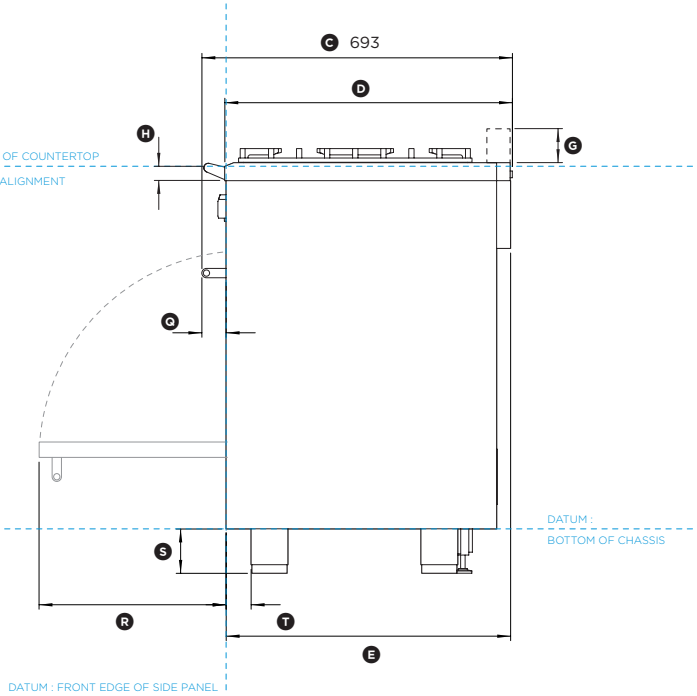

0 100 200 400
millimetres

Model no:
OR30SCG6X1, OR30SCG6B1, OR30SCG6W1, OR30SCG6R1
(refer page 1 for metric measurements)

Product Dimensions	**mm**
Ⓐ Overall height of range (from floor to cooktop, excluding pan supports)	min 908 max 956
Ⓑ Overall width of range	759
Ⓒ Overall depth of range including handle and dials	693
Ⓓ Depth from front of range to rear (excl. handle and dials)	641
Ⓔ Depth from rear of chassis to front of side panel	638
Ⓕ Height from top of cooktop to top of pan supports	32
Ⓖ Height from top of cooktop to top of optional backguard	76
Ⓗ Height of cooktop front face (excl. chamfer)	32
Ⓘ Depth of rear trim / optional backguard	51
Ⓙ Height from countertop to bottom of chassis	808
Ⓚ Height from countertop to bottom of control panel	147
Ⓛ Height from top of door to bottom of chassis	641
Ⓜ Height from top of warmer drawer to bottom of chassis	151
Ⓝ Height from handle to bottom of chassis	570
Ⓞ Thickness of handle rail (not including standoffs)	20
Ⓟ Width of handle (including standoffs)	754
Ⓠ Depth of handle (measured from front of door)	54
Ⓡ Depth of open door to front of side panel	417
Ⓢ Adjustable feet height	min 92 max 140
Ⓣ Toekick depth - with optional toe kick panel - without toe kick panel	52 56
Ⓤ Width of optional toe kick panel	757

Cavity Dimensions	**mm**
Overall width of cavity	min 762
Overall depth of cavity	641
Overall height of cavity	min 908 max 956

IMPORTANT NOTE: For full installation and clearance details please refer to our installation manual.


INDICATES CAVITY CLEARANCES ----------
INDICATES PRODUCT DATUM ----------

DATE: **20.6.2024**

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

FISHER & PAYKEL

DATA SHEET
30" Classic Freestanding Range Dual Fuel

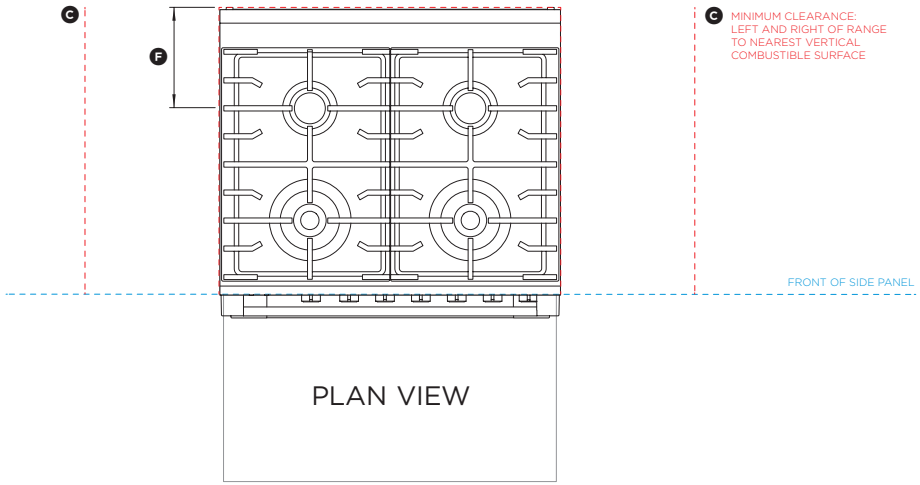

0 100 200 400
millimetres

Model no:
OR30SCG6X1, OR30SCG6B1, OR30SCG6W1, OR30SCG6R1
(refer page 5 for metric measurements)


Clearance Dimensions	**mm**
Ⓐ Minimum width of ventilation hood installed above range - not shown*	762
Ⓑ Minimum vertical distance between countertop and cabinet extending above counter	457
Ⓒ Minimum clearance from left and right of range to nearest vertical combustible surface	330
Ⓓ Minimum clearance from cooking surface to: - overhead cabinet centred above the cooktop (combustible / unprotected) - overhead cabinet centred above the cooktop (non-combustible / protected) - ventilation hood centred above the cooktop	 914 762 762
Ⓔ Maximum overall depth of overhead cabinetry	330
Ⓕ Distance from center of rear burner to rear of product	225

*IMPORTANT NOTE: For full installation and clearance details please refer to our installation manual.


INDICATES CLEARANCES ----------
INDICATES PRODUCT DATUM ----------

DATE: **20.6.2024**

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

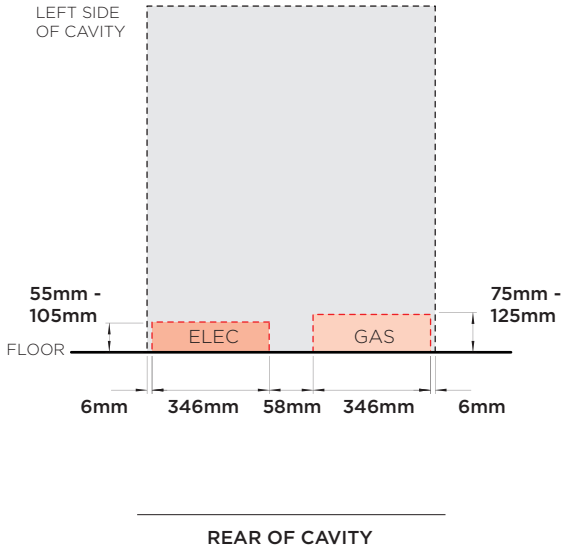

REAR OF CAVITY

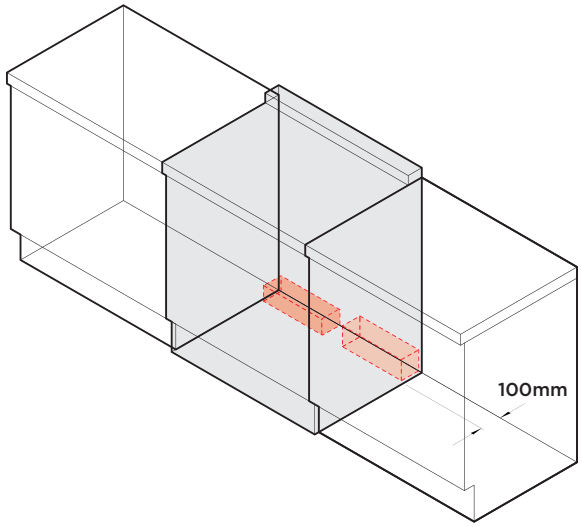

FISHER & PAYKEL

DATA SHEET
30" Classic Freestanding Range Dual Fuel

Model no:
OR30SCG6X1, OR30SCG6B1, OR30SCG6W1, OR30SCG6R1
(refer page 3 for imperial measurements)

Specifications	
Oven Total Capacity	100L
Electrical	
Supply	240-208/120 V, 60 Hz
Service	40 A
Connection	4-prong grounding type [NEMA 14-50P plug]
Gas	
Type	Natural Gas 4" W.C.P. / LP Propane 11" W.C.P.
Connection	1/2" NPT Minimum 5/8" dia. flex line
Weight	109kgs

*IMPORTANT NOTE: For full installation and clearance details please refer to our installation manual.

DATE: **20.6.2024**

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com