

FISHER & PAYKEL

DATA SHEET
48" Professional Range

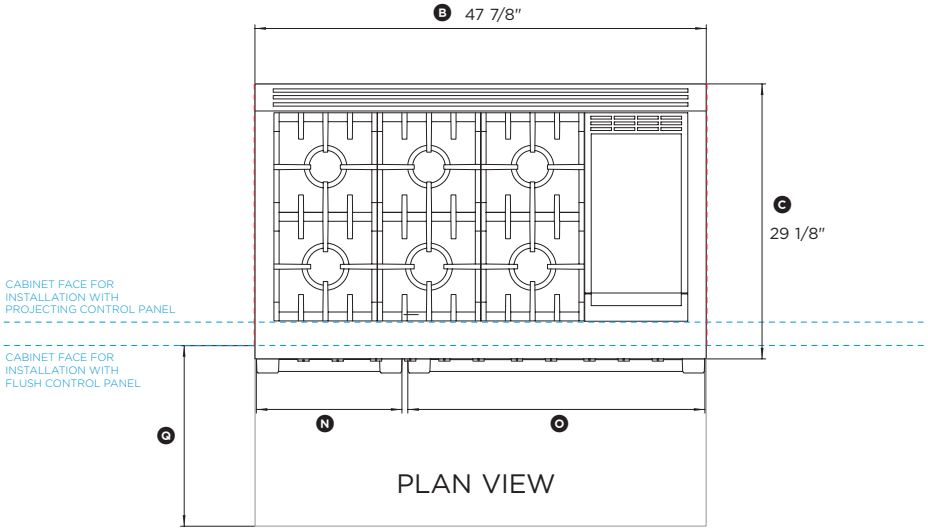

PLAN VIEW

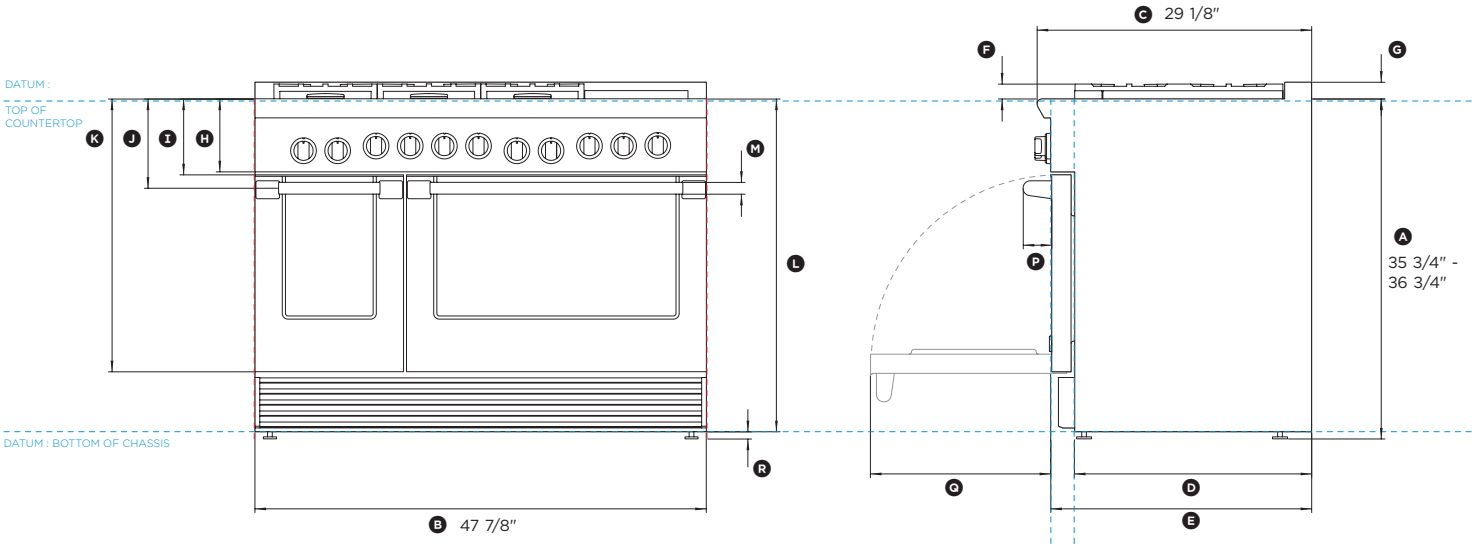

FRONT VIEW

PROFILE VIEW

0 5 10 20 inches

Model no:
RGV2-486GD-N, RGV2-486GD-L
RDV2-486GD-N, RDV2-486GD-L
(refer page 3 for metric measurements)

Product Dimensions	**in**
Ⓐ Overall height of range (from floor to cooktop, excluding grates and vent trim)	min 35 3/4" max 36 3/4"
Ⓑ Overall width of range	47 7/8"
Ⓒ Overall depth of range (excluding handle and dials)	29 1/8"
Ⓓ Depth from rear of chassis to cabinetry face – projecting	25 1/8"
Ⓔ Depth from rear of chassis to cabinetry face – flush	27 11/16"
Ⓕ Height from countertop to top of pan supports	1 9/16"
Ⓖ Height from countertop to top of vent trim	1 3/4"
Ⓗ Height from countertop to bottom of control panel	7 3/4"
Ⓘ Height from countertop to top of door	8 1/16"
Ⓙ Height from countertop to center of handle	9 7/16"
Ⓚ Height from countertop to bottom of door	28 7/8"
Ⓛ Height from countertop to bottom of chassis	35 1/4"
Ⓜ Thickness of handles (not including standoffs)	1 1/4"
Ⓝ Width of left handle (including standoffs)	15 1/16"
Ⓞ Width of right handle (including standoffs)	31 1/2"
Ⓟ Depth of handle (measured from front of door)	3 1/16"
Ⓠ Depth of open door to cabinetry face – flush	19 1/8"
Ⓡ Adjustable feet height	min 1/2" max 1 1/2"

Cavity Dimensions	**in**
Overall height of cavity	min 35 3/4" max 36 3/4"
Overall width of cavity	min 48"
Overall depth of cavity for projecting control panel Overall depth of cavity for flush control panel	max 25 1/8" max 27 11/16"


INDICATES PRODUCT DATUM ----------

DATE: **24.04.2018**


IMPORTANT: Throughout this guide, dimensions may vary by ±2mm (1/16"). Read the installation guide for detailed information on installing the product. For full installation instructions and specifications visit fisherpaykel.com

FISHER & PAYKEL

DATA SHEET
48″ Professional Range

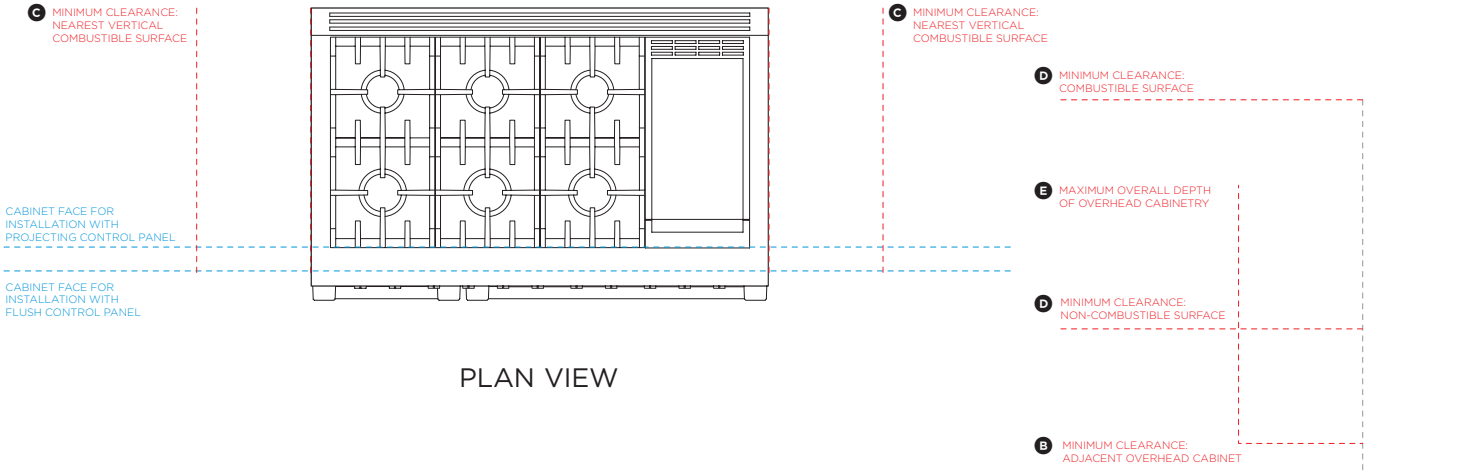

PLAN VIEW

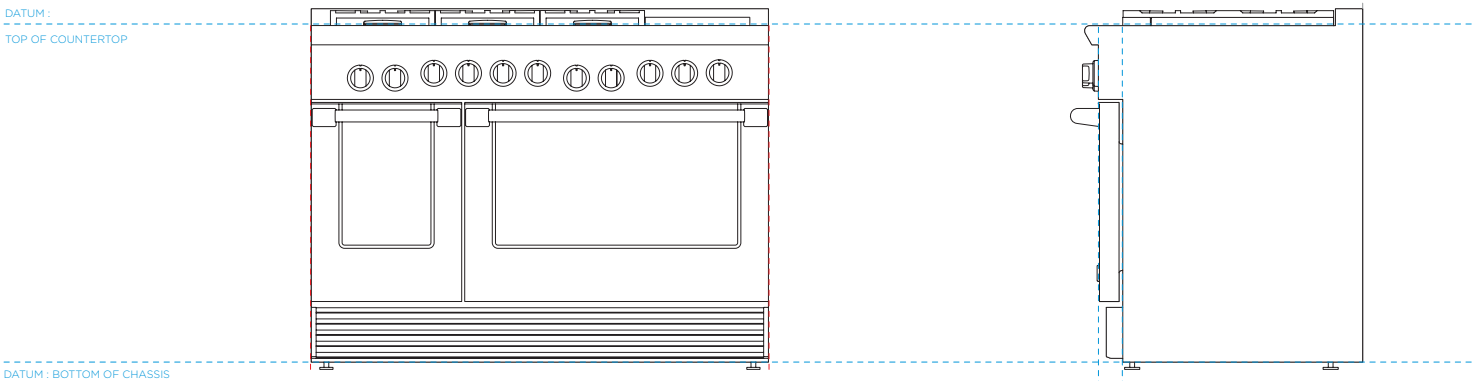

FRONT VIEW

PROFILE VIEW

0 5 10 20 inches

CABINET FACE FOR INSTALLATION WITH FLUSH CONTROL PANEL

CABINET FACE FOR INSTALLATION WITH PROJECTING CONTROL PANEL

Model no:
RGV2-486GD-N, RGV2-486GD-L
RDV2-486GD-N, RDV2-486GD-L
(refer page 4 for metric measurements)

Clearance Dimensions	**in**
Ⓐ Minimum width of ventilation hood installed above range – not shown*	48″
Ⓑ Minimum vertical distance between countertop and cabinet extending above counter	18″
Ⓒ Minimum clearance from left and right edge of range to nearest vertical combustible surface	12″
Ⓓ Minimum clearance from cooking surface to:	
– combustible surface centered above the cooking surface	54″
– non-combustible surface centered above the cooking surface	30″
Ⓔ Maximum overall depth of overhead cabinetry	13″


INDICATES CABINETRY CLEARANCES ----------
INDICATES PRODUCT DATUM ----------

DATE: **24.04.2018**


IMPORTANT: Throughout this guide, dimensions may vary by ±2mm (1/16″). Read the installation guide for detailed information on installing the product. For full installation instructions and specifications visit fisherpaykel.com

FISHER & PAYKEL

DATA SHEET
48" Professional Range

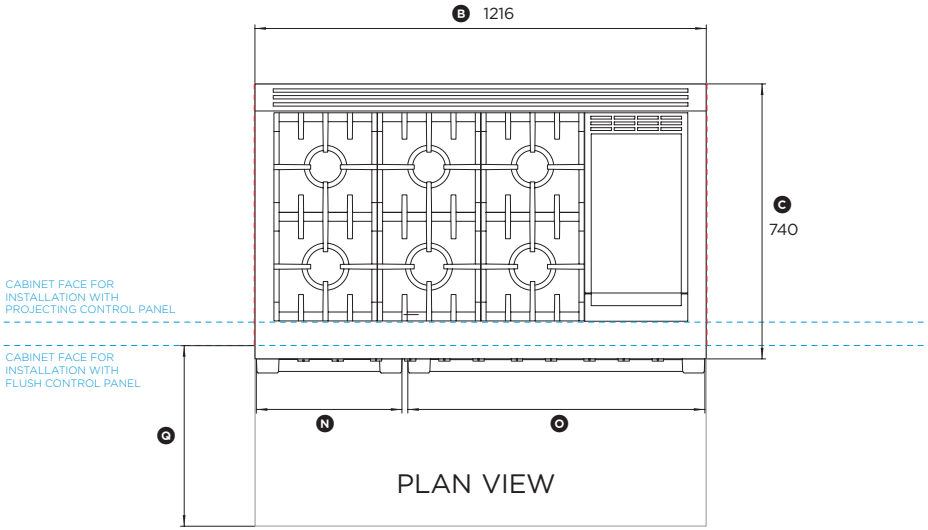

PLAN VIEW

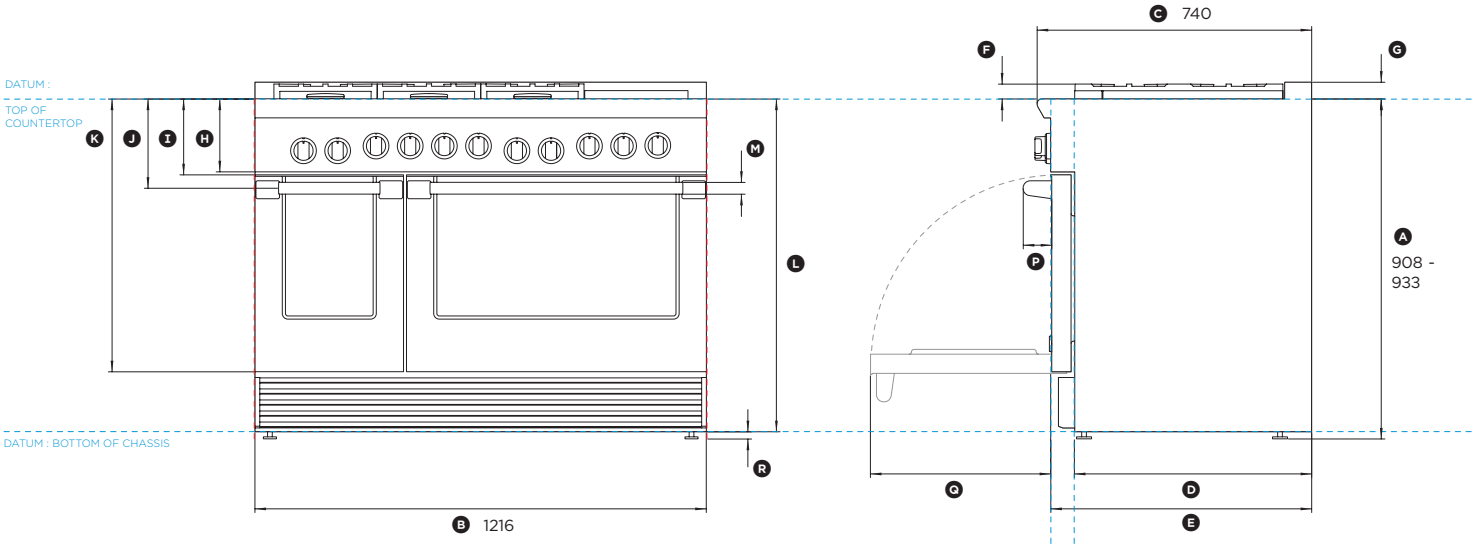

FRONT VIEW

PROFILE VIEW

0 100 200 400 millimetres

Model no:
RGV2-486GD-N, RGV2-486GD-L
RDV2-486GD-N, RDV2-486GD-L
(refer page 1 for imperial measurements)

Product Dimensions	**mm**
Ⓐ Overall height of range (from floor to cooktop, excluding grates and vent trim)	min 908 max 933
Ⓑ Overall width of range	1216
Ⓒ Overall depth of range (excluding handle and dials)	740
Ⓓ Depth from rear of chassis to cabinetry face – projecting	638
Ⓔ Depth from rear of chassis to cabinetry face – flush	703
Ⓕ Height from countertop to top of pan supports	40
Ⓖ Height from countertop to top of vent trim	45
Ⓗ Height from countertop to bottom of control panel	196
Ⓘ Height from countertop to top of door	204
Ⓙ Height from countertop to centre of handle	240
Ⓚ Height from countertop to bottom of door	734
Ⓛ Height from countertop to bottom of chassis	895
Ⓜ Thickness of handles (not including standoffs)	32
Ⓝ Width of left handle (including standoffs)	393
Ⓞ Width of right handle (including standoffs)	801
Ⓟ Depth of handle (measured from front of door)	77
Ⓠ Depth of open door to cabinetry face – flush	486
Ⓡ Adjustable feet height	min 13 max 38

Cavity Dimensions	**mm**
Overall height of cavity	min 908 max 933
Overall width of cavity	min 1219
Overall depth of cavity for projecting control panel Overall depth of cavity for flush control panel	max 638 max 703


INDICATES PRODUCT DATUM ----------

DATE: **24.04.2018**


IMPORTANT: Throughout this guide, dimensions may vary by ±2mm (1/16"). Read the installation guide for detailed information on installing the product. For full installation instructions and specifications visit fisherpaykel.com

FISHER & PAYKEL

DATA SHEET
48" Professional Range

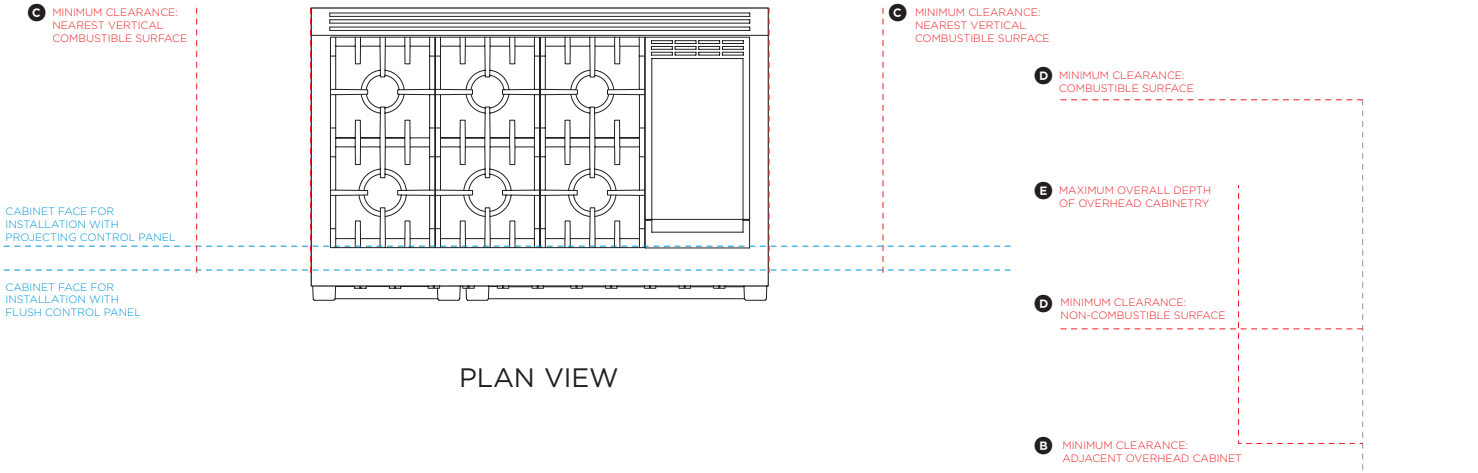

PLAN VIEW

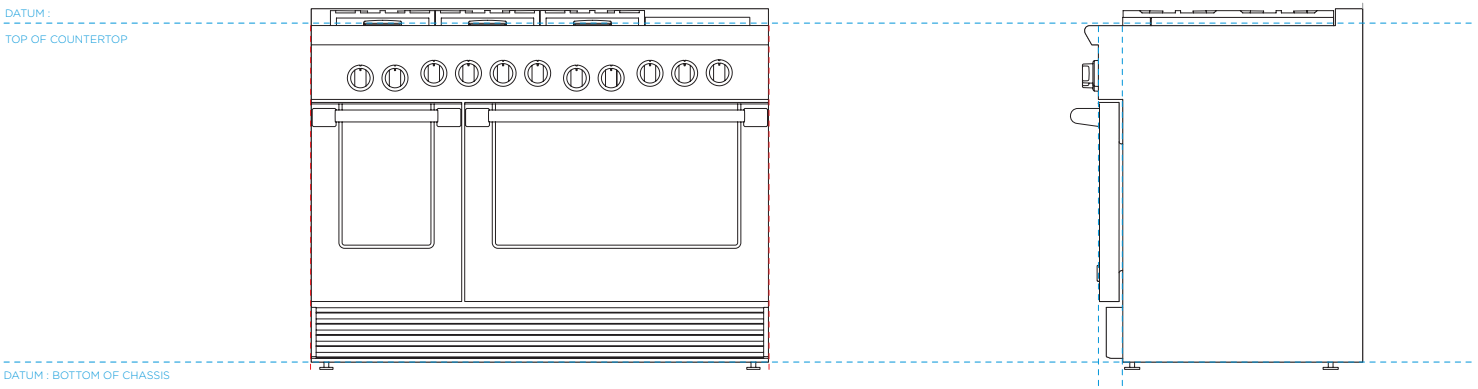

FRONT VIEW

PROFILE VIEW

0 100 200 400 millimetres

CABINET FACE FOR INSTALLATION WITH FLUSH CONTROL PANEL

CABINET FACE FOR INSTALLATION WITH PROJECTING CONTROL PANEL

Model no:
RGV2-486GD-N, RGV2-486GD-L
RDV2-486GD-N, RDV2-486GD-L
(refer page 2 for imperial measurements)

Clearance Dimensions	**mm**
Ⓐ Minimum width of ventilation hood installed above range – not shown*	1219
Ⓑ Minimum vertical distance between countertop and cabinet extending above counter	457
Ⓒ Minimum clearance from left and right edge of range to nearest vertical combustible surface	305
Ⓓ Minimum clearance from cooking surface to:	
– combustible surface centred above the cooking surface	1372
– non-combustible surface centred above the cooking surface	762
Ⓔ Maximum overall depth of overhead cabinetry	330

INDICATES CABINETRY CLEARANCES ----------
INDICATES PRODUCT DATUM ----------

DATE: **24.04.2018**

IMPORTANT: Throughout this guide, dimensions may vary by ±2mm (1/16"). Read the installation guide for detailed information on installing the product. For full installation instructions and specifications visit fisherpaykel.com