PRD48WDSGU 48-INCH DUAL-FUEL PRO GRAND® RANGE WITH STEAM AND GRIDDLE PROFESSIONAL COLLECTION, COMMERCIAL-DEPTH, PORCELAIN COOKTOP SURFACE








FEATURES & BENEFITS

- ★ ExtraHigh Star[®] Burner provides 22,000 BTUs of power for searing or boiling with QuickClean Base[®] designed for easy surface cleaning
- ★ 4 ExtraLow[®] burners offer precision simmering, melting or keeping warm
 - Non-stick griddle provides even heating across the entire cooking surface
 - Steam oven features 9 advanced conventional cooking modes
- ★ Super Fast 2-hour self-clean mode is the fastest in the industry

TECHNICAL DETAILS				
Circuit Breaker	50 A			
Volts	240 / 208 V, 60Hz 4 Wire			
Energy Source	Gas and Electric			
Plug Туре	No Plug			
Power Cord Length	Purchase Separately			
Gas Supply	3/4"			
WARRANTY				
Limited Warranty, Entire Appliance, Parts and Labor	2 Year			

SEE PAGE 2 FOR INCLUDED AND OPTIONAL ACCESSORIES

RANGETOP



Total Number of Cooktop Burners	6 + Griddle			
1 – Power of Back Left Burner BTU	15,000 and XLO			
2 – Power of Front Left Burner BTU	22,000 and XHI / XLO			
3 – Power of Back Center Burner BTU	15,000			
4 – Power of Front Center Burner BTU	18,000			
5 – Power of Center 12" Electric Griddle	1,630 W (6-Pass)			
6 – Power of Back Right Burner BTU	15,000 and XLO			
7 – Power of Front Right Burner BTU	18,000 and XLO			
OVEN				
Oven Capacity (Lg / Sm) 4.9 / 1.6 cu. ft.				
Cooking Modes Large Cavity				

Cooking Modes – Large Cavity

Bake, Convection Bake, True Convection, Convection Roast, Roast, Convection Broil, Broil

Cooking Modes – Small Cavity

Proof, Keep Warm, Steam Programs, True Convection, Slow Cook, Defrost, Reheat, Steam Convection, Steam

Denost, Reneat, Steam Convection, Steam				
Sabbath (Lg / Sm)	Yes / Yes			
Self-Clean (Lg / Sm)	Yes / Yes			
Telescopic Rack(s) (Lg / Sm)	3 / 0			
Interior Lights (Lg / Sm)	2 / 1			
Bake Power (Lg / Sm)	2,000 W / NA			
Broil Power (Lg / Sm)	4,000 W / NA			
Convection Power (Lg / Sm)	2,750 W / NA			
Steam Bowl Element	1,800 W			
Steam Convection	2,750 W			
Warming Drawer	400 W			
Home Connect® (Wi-Fi Enabled)	Yes, Large Oven Only			
Lg Cavity Interior Dimensions (HxWxD)	16 3/8" x 24 1/4" x 21 1/2"			
Lg Cavity Usable Dimensions (HxWxD)	12" x 22 1/2 " x 19 1/2 "			
Sm Cavity Interior Dimensions (HxWxD)	10 1/4" × 14 1/4" × 17 3/8"			
Sm Cavity Usable Dimensions (HxWxD)	9 5/8 " x 12" x 16"			
DIMENSIONS & WEIGHT				
Overall Appliance Dimensions (HxWxD)	35 3/4 " – 36 3/4 " × 47 15/16 " × 27 7/8 "			
Required Cutout Size (HxWxD)	35 3/4 " – 36 3/4 " × 48" × 24" – 25 1/8 "			
Net Weight	507 lbs.			

PRD48WDSGU 48-INCH DUAL-FUEL PRO GRAND® RANGE WITH STEAM AND GRIDDLE PROFESSIONAL COLLECTION, COMMERCIAL-DEPTH, PORCELAIN COOKTOP SURFACE

ACCESSORIES (INCLUDED)

3 Telescopic Racks, 1 Sm. Std. Rack, Multi-Point Meat Probe, 1 Griddle Plate, 1 Grease Tray, 1 Steam Pan, Island Trim

ACCESSORIES (OPTIONAL)



PWOKRINGHC Wok Ring













LP Conversion Kit, Pro Grand Dual-Fuel Models with 4 and 6 Burners



PALPKITDGW



00741839 Baking Tray, Full Size, 1 **1/8**" Deep




00577553

Perforated Cooking Pan, Half Size, 1 5/8" Deep



PA12CHPBLK Chopping Block / Cutting Board





Thermador



12" Grill Plate with Tray (for Griddle Models), Fusion Coating



PA48WLBG 7" Low Backguard*

PA12GRILLW



PARKB48SGY Metallic Blue Knob Kit



00577551 Perforated Cooking Pan, Full Size, 1 5/8" Deep



00577552 Cooking Pan, Half Size, 1 **5/8**" Deep


PAALTKITGW

High Altitude Kit, Natural Gas or Dual-Fuel Pro Grand Ranges, 5,400 ft. to 10,200 ft.


Contact Customer Support

High Altitude Kit, Gas or Dual-Fuel Pro Grand Ranges Connected to LP Gas, 10,000 ft. to 10,200 ft.

PRD48WDSGU 48-INCH DUAL-FUEL PRO GRAND® RANGE WITH STEAM AND GRIDDLE PROFESSIONAL COLLECTION, COMMERCIAL-DEPTH, PORCELAIN COOKTOP SURFACE



48-INCH RANGE CUTOUT DIMENSIONS

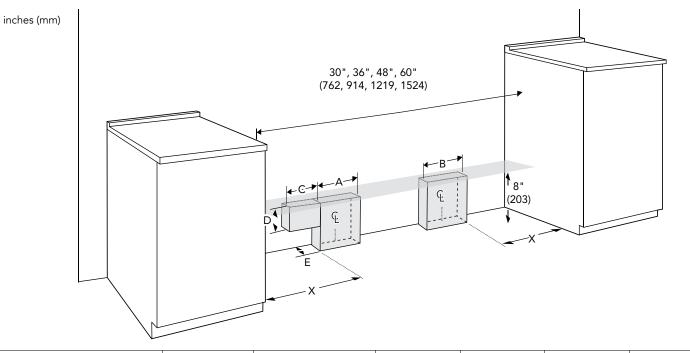

Range model	Gas zone A	Electric zone B	Х	С	D	E
All Harmony series	4'' (102)	6'' (152)	5'' (127)	N/A	N/A	2'' (51)
36''/ 48'' Grand series	4'' (102)	6'' (152)	8'' (203)	4'' (102)	3'' (76)	2'' (51)
60'' Grand series	4'' (102)	6'' (152)	8'' (203)	4'' (102)	3'' (76)	1'' (25)



35⁷/8" (911 mm) Min.

36¾" (933 mm) Max,

materials Δ 30⁵/8" (778 mm) 293/8" (746 mm)

 Δ As defined in the "National Fuel Gas Code" (ANSI Z223.1, Current Edition). Clearances from non-combustible materials are not part of the ANSI Z21.1 scope and are not certified by CSA. Clearances of less than 6" (152 mm) must be approved by the local codes and/or by the local authority having jurisdiction.





Combustible

Materials Δ

7" (178 mm) Lowback ▼

> Combustible Back Wall Δ

251/8" (638 mm)-

-25³/4" (654 mm)

49¹/8" (1248 mm)

max. recess depth

minimum clearance is required between the top of the cooking surface and the bottom of an unprotected cabinet. A 30-inch clearance can be used when the bottom of the wood or metal 36" (914 mm) min. cabinet is protected by to combustible not less than 1/4 inch of a flame retardant material covered with not less than No. 28 MSG sheet steel, 0.015 inch (0.4 mm) thick stainless steel, 0.024 inch (0.6 mm) aluminum, or 0.020 inch (0.5 mm) thick copper.

NOTE: A 36-inch




PRD48WDSGU 48-INCH DUAL-FUEL PRO GRAND® RANGE WITH STEAM AND GRIDDLE



PROFESSIONAL COLLECTION, COMMERCIAL-DEPTH, PORCELAIN COOKTOP SURFACE

48-INCH RANGE DIMENSIONS AND CLEARANCE REQUIREMENTS WITH "FLUSH ISLAND TRIM"

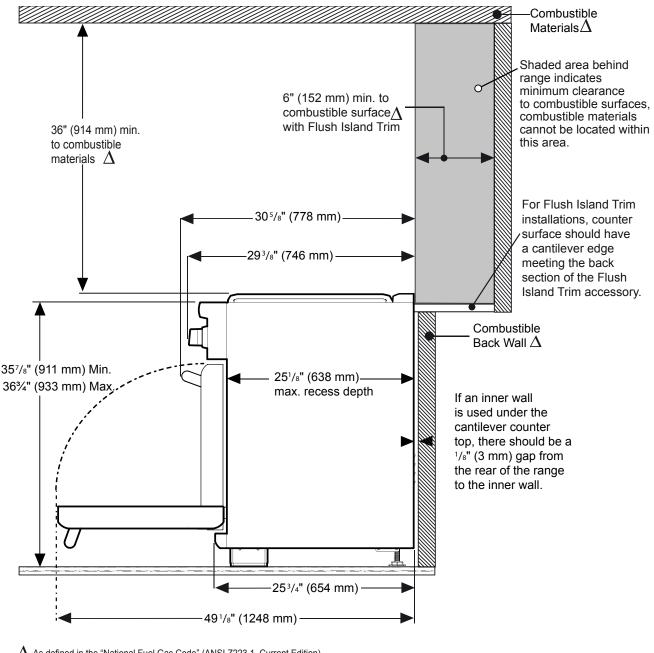

As defined in the "National Fuel Gas Code" (ANSI Z223.1, Current Edition). Clearances from non-combustible materials are not part of the ANSI Z21.1 scope and are not certified by CSA. Clearances of less than 6" (152 mm) must be approved by the local codes and/or by the local authority having jurisdiction.

These warranties give you specific legal rights and you may have other rights that vary from state to state. Limited warranty from date of delivery. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | @2025 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.