

UNDER-COUNTER ICE MAKER

UR15IM20RS (RIGHT DOOR SWING)
UL15IM20RS (LEFT DOOR SWING)

Featuring IQ-Touch™ Electronic Controls



PRODUCT DIMENSIONS

Height (Adjustable)	33-3/4" – 34-3/4"
Width	14-7/8"
Depth (Including Handle)	26-3/4"

MORE EASY-TO-USE FEATURES

VERSATILE INSTALLATION OPTIONS

Can be used freestanding or under-counter.

FACTORY INSTALLED DRAIN PUMP

This ice maker is easy to install, unlike some that require installation of a separate accessory drain pump kit

ECO MODE

Slows ice production and saves approximately 23% of water and electric usage.

DELAY MODE

Suspends ice production for 2, 4, 6, or 8 hours or days. Perfect during sleeping hours, or during the week for your weekend vacation home.

SIGNATURE FEATURES



LARGE CAPACITY

Stores up to 30 pounds of ice cubes — and makes over 34 pounds of ice in a 24-hour period.



CRYSTAL-CLEAR ICE CUBES

Makes crystal-clear ice perfect for entertaining.



INTEGRATED CONTROLS

Controls are on the top of the door — so they're easy to set when needed, and hidden from view when the door is closed.



LOW MAINTENANCE

Has a cleaning mode and self-defrosts.

Available in:



Stainless
(S)

UNDER-COUNTER ICE MAKER

UR15IM20RS (RIGHT DOOR SWING)

UL15IM20RS (LEFT DOOR SWING)



15" UNDER-COUNTER ICE MAKER

Capacity	Up to 30 Lbs.
Installation Type	Built-In / Freestanding

FEATURES

IQ-Touch™ Electronic Controls	Yes
Daily Ice Production	Over 34 Lbs.
Clear Ice Cubes	Yes
Ice Cube Size	3/4"
Ice Cubes Produced per Cycle	130
3-Step Self-Cleaning Process	Yes
Self-Cleaning of Mineral Deposits	Yes
Factory Installed Drain Pump	Yes
Frost-Free Performance	Yes

ADDITIONAL FEATURES

Signature Soft-Arc Door and Handle Design	Yes
Luxury-Close™ Door	Yes
Adjustable Leveling Legs	4
ECO Mode	Yes
Delay Mode	Yes
Cleaning Mode	Yes

ACCESSORIES

Ice Scoop	Included
Electrolux ICON® Handle Kit – PN# 5304503432	Optional


SPECIFICATIONS

Colour –	
Stainless Steel	S
Power Supply / Water Inlet Location	Left Bottom Rear
Voltage Rating	120V / 60 Hz
Connected Load (kW Rating) @ 120 Volts [†]	0.48
Minimum Circuit Required (Amps)	15A
Gravity Assisted Drain	Required
Shipping Weight (Approx.)	105 Lbs.

[†] For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.

NOTE: Always consult local and national electric and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at electroluxappliances.ca.

Specifications subject to change.

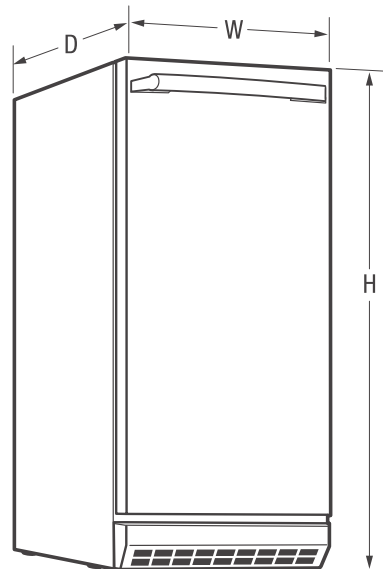

PRODUCT DIMENSIONS

Height (Adjustable)	33-3/4" – 34-3/4"
Width	14-7/8"
Depth (Including Rear Extrusion)	24"
(with Door Open 90°)	37-3/4"

Electrolux Major Appliances, N.A.

CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • electroluxappliances.ca

UR15IM20R 06/16

© 2016 Electrolux Major Appliances, N.A.

Printed in Canada



High standards of quality at Electrolux Home Products, Inc. mean we are constantly working to improve our products. We reserve the right to change specifications or discontinue models without notice.