



Hotte de cuisinière de 30 po

Ventilation

Available Products: FHWC3040MS

Available Colors: Acier inoxydable

Version: 08/22

Spécifications du produit

Système de ventilation

Vitesses du ventilateur d'extraction	3
Capacité maximale de la circulation d'air	300 PCM
Évaluation maximale des sones	7.7 sone
Filtre à charbon inclus	Oui

Système d'éclairage de surface

Type d'éclairage	Halogène
Nombre de lumières	2

Spécifications électriques

Tension nominale	120 V
------------------	-------

Certifications et approbations

Conforme à la norme ADA	Non
-------------------------	-----

Commandes

Type de commande	Bouton-poussoir
------------------	-----------------

Dimensions et volume

Hauteur	5 po
Largeur	30 po
Profondeur	18.625 po


Spécifications générales

Étiquette Prop 65	Oui
Niveau sonore	68.2 dB
Garantie - Main-d'œuvre	1 Year
Garantie - Pièces	1 Year

Certifications et approbations de sécurité

Classé CSA	Non
Classé UL	Oui
Classé ETL	Non

Schéma d'installation

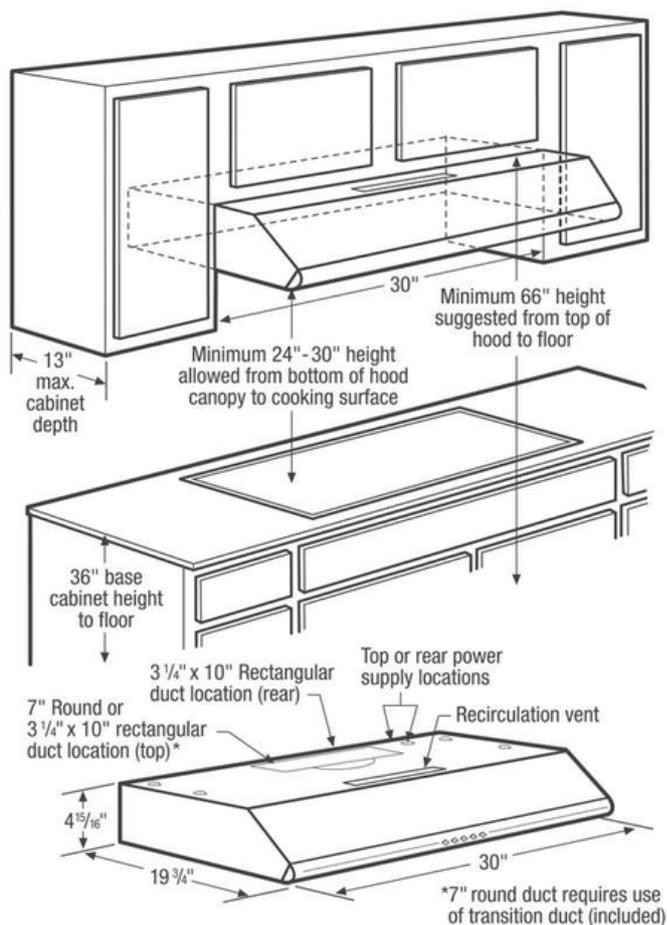


Exhaust Options


Vent hood can be vertically or horizontally ducted outside using round or rectangular duct; or recirculated inside with no ducting required.

For detailed duct preparation and installation specifications, refer to installation instructions on web.

Outside Vertical – 7" Round Duct Cabinet Bottom

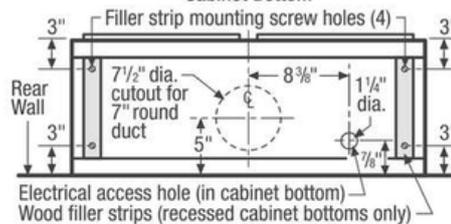

Outside Vertical – 3 1/4" x 10" Rectangular Duct Cabinet Bottom

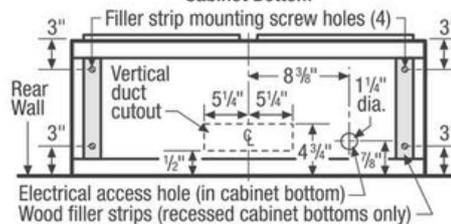

Outside Horizontal – 3 1/4" x 10" Rectangular Duct Cabinet Front

