



36" Overhead Range Hood
Ventilation
Available Products: FHWC3625MB, FHWC3625MS, FHWC3625MW
Available Colors: Black, Stainless Steel, White
Version: 06/24

Product Specifications

Ventilation System

Exhaust Fan Speeds	2
Maximum Air Flow Capacity	190 CFM
Minimum Air Flow Capacity	160 CFM
Maximum Sones Rating	7 sone
Charcoal Filter Included	No

Surface Light System

Lighting Type	Incandescent
---------------	--------------

Electrical Specifications

Voltage Rating	120 V
----------------	-------

Certifications and Approvals

ADA Compliant	Yes
---------------	-----

Controls

Control Type	Rocker Switch
--------------	---------------

Dimensions and Volume

Height	5"
Width	36"
Depth	18 5/8"


General Specifications

Prop 65 Label	Yes
Warranty - Labor	1 Year
Warranty - Parts	1 Year

Safety Certifications and Approvals

UL Listed	Yes
-----------	-----

Installation Diagram

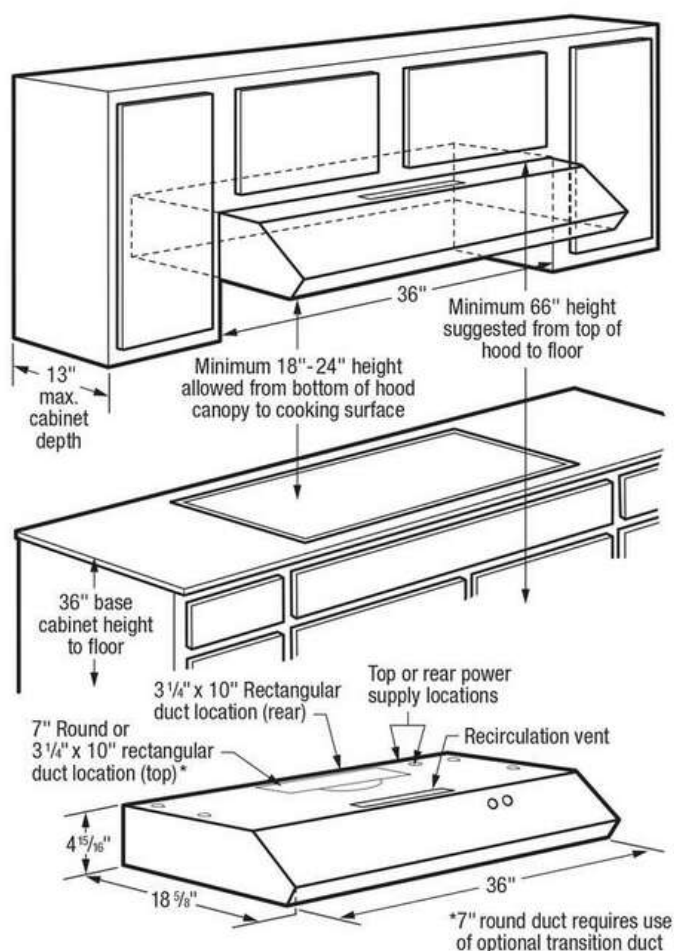


Exhaust Options


Vent hood can be vertically or horizontally ducted outside using round or rectangular duct; or recirculated inside with no ducting required.

For detailed duct preparation and installation specifications, refer to installation instructions on web.

Outside Vertical – 7" Round Duct Cabinet Bottom

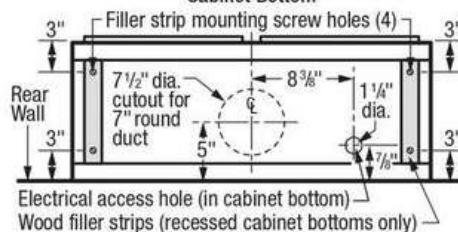

Outside Vertical – 3 1/4" x 10" Rectangular Duct Cabinet Bottom

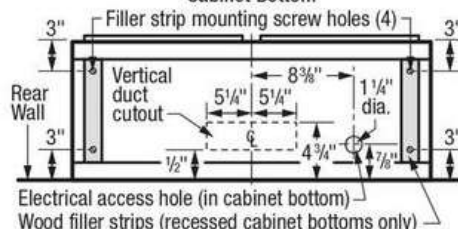

Outside Horizontal – 3 1/4" x 10" Rectangular Duct Cabinet Front

