FRIGIDAIRE

1.4 Cu. Ft. Over-The-Range Microwave

Over-The-Range Microwave

Available Products: UMV1422UX

Available Colors: Stainless Steel

Version: 04/24

Product Specifications

Cooking Controls

Clock	Yes
Cooking Power	1000 Watts
Defrost Time	Yes
Defrost Weight	Yes
Number of Power Levels	9

Ventilation System

Exhaust Fan Speeds	2
Removable Grease Filter	Yes
Charcoal Filter Included	Yes

Microwave Control Features

+ 30 Seconds	Yes

Internal Specifications

Interior Color	White
Turntable Diameter	13 63/100"

Dimensions and Volume

Height	17"
Width	23 7/8"
Depth	16 3/16"
Microwave Interior Height	10 11/16"
Microwave Interior Width	15 3/8"
Microwave Interior Depth	15 5/16"
Microwave Capacity	1.4 Cu. Ft.

Installation

Power Supply Connection Location	Bottom Center

Safety Certifications and Approvals

UL Listed	Yes

Microwave Cooking

Melt / Soften	Yes
Popcorn	Yes
Potato	Yes
Sensor Cooking	Yes
Veggies	Yes

Controls

Control Lock	Yes

Display

Control Location	Right

Surface Light System

Lighting Type	LED

Electrical Specifications

Voltage Rating	120 V

General Specifications

Prop 65 Label	Yes
Warranty - Labor	1 Year
Warranty - Parts	1 Year

For planning purposes only. We reserve the right to change specifications or discontinue models without notice.
Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com / frigidaire.ca
Electrolux Major Appliances, N.A.
USA • 10200 David Taylor Drive •Charlotte, NC 28262 • Charlotte, NC 28262 • 1-877-4electrolux (1-877-435-3287) • frigidaire.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

1.4 Cu. Ft. Over-The-Range Microwave	Over-The-Range Microwave
Available Products: UMV1422UX	Available Colors: Stainless Steel
Version: 04/24	

Installation Diagram

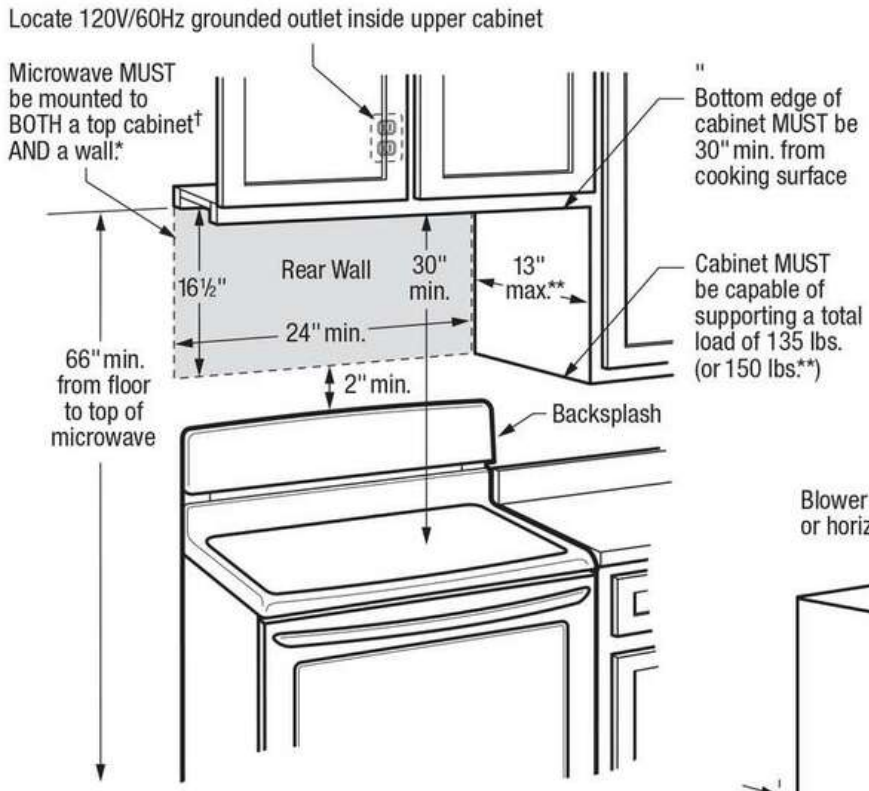

†When installing beneath smooth, flat cabinets, refer to cabinet template for detailed power cord clearance instructions

*Can NOT be installed in island or peninsula cabinet arrangements
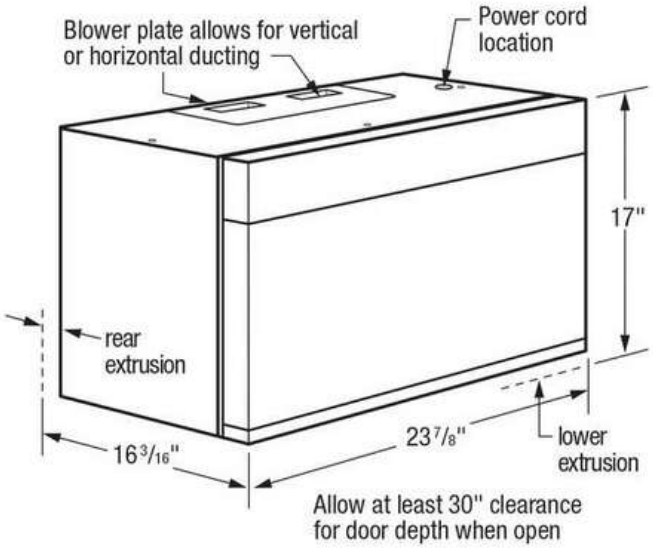
**If cabinet depth (including doors) is deeper than 13", unit MUST be spaced out from rear wall using adequate materials (supporting 150 lbs.) to allow proper top vent air exhaust/intake